



# ABS

优势 • 品牌 • 服务  
Advantage Brand Service

**浙江创发拉链科技有限公司**

Zhejiang Chuangfa Zipper Technology Co.,ltd.



**金属火车头**  
Metal ZA Slider



适用范围Apply:  
2#/3#/5#/8#/10#/12#/15#

**金属象鼻头**  
Metal Non-lock



适用范围Apply:  
3#/4#/5#/8#/10#

**金属弹簧头**  
Metal Slider Semi Auto-lock



适用范围Apply:  
3#/4#/5#/8#

**金属普通头**  
Metal Auto-lock



适用范围Apply: 1#/2#/3#/4#/  
5#/7#/8#/10#/12#/15#/20#

**金属导轨头**  
Metal Reversible Slider



适用范围Apply:  
3#/5#/8#/10#

**金属欧款头**  
Metal European Slider



适用范围Apply: 1#/2#/3#/  
5#/7#/8#/10#/12#/15#/20#

**树脂火车头**  
Plastic ZA Slider



适用范围Apply:  
3#/5#/8#/10#

**树脂象鼻头**  
Plastic Non-lock Slider



适用范围Apply:  
3#/5#/8#/10#/12#/15#/20#

**树脂弹簧头**  
Plastic Semi Auto-lock Slider



适用范围Apply:  
3#/5#/8#/10#/12#/15#

**树脂蝶底头**  
Plastic Butterfly Slider



适用范围Apply:  
3#/5#/8#

**树脂欧款头**  
Plastic European Slider



适用范围Apply:  
3#/5#/8#/10#/12#/15#/20#

**树脂普通头**  
Plastic Auto-lock Slider



适用范围Apply:  
3#/5#/8#/10#/12#/15#/20#

**树脂导轨头**  
Plastic Reversible Slider



适用范围Apply:  
3#/5#/8#/10#

**树脂塑料头**  
Plastic Slider



适用范围Apply:  
3#/5#/8#/10#

**尼龙火车头**  
Nylon ZA Slider



适用范围Apply:  
3#/4#/5#/7#/8#

**尼龙象鼻头**  
Nylon Non-lock Slider



适用范围Apply:  
3#/4#/5#/7#/8#

**尼龙弹簧头**  
Nylon Semi Auto-lock Slider



适用范围Apply:  
3#/4#/5#/7#/8#

**尼龙导轨头**  
Nylon Reversible Slider



适用范围Apply:  
3#/4#/5#/7#/8#

**尼龙欧款头**  
Nylon European Slider



适用范围Apply:  
3#/7#

**尼龙普通头**  
Nylon Auto-lock Slider



适用范围Apply:  
3#/4#/5#/7#/8#

**尼龙塑料头**  
Nylon Plastic Slider



适用范围Apply:  
3#/4#/5#/7#/8#

**隐形拉头**  
Nylon Invisible Slider



适用范围Apply:  
3#/4#/5#



**16001**



尺寸Dim.(mm): 23.32\*3.63\*1.64  
克重N.W.(g): 1.41  
适用范围Apply:  
挂钩J-hook connector 3# 5#

**16002**



尺寸Dim.(mm): 19.60\*14.92\*5.36  
克重N.W.(g): 1.59  
适用范围Apply:  
挂钩J-hook connector 3#

**16003**



尺寸Dim.(mm): 24.85\*4.86\*2.12  
克重N.W.(g): 1.13  
适用范围Apply:  
挂钩J-hook connector 3#

**16004**



尺寸Dim.(mm): 24.52\*7.34\*3.16  
克重N.W.(g): 2.00  
适用范围Apply:  
挂钩J-hook connector 3# 5#

**16005**



尺寸Dim.(mm): 32.93\*8.61\*1.95  
克重N.W.(g): 2.88  
扭力Torsion(N.m): 0.86  
适用范围Apply: 直装Directly 5#

**16006**



尺寸Dim.(mm): 34.80\*5.15\*3.33  
克重N.W.(g): 2.44  
适用范围Apply:  
连接件Fastnet connector

**16007**



尺寸Dim.(mm): 25.30\*10.16\*2.57  
克重N.W.(g): 3.03  
适用范围Apply:  
挂钩J-hook connector 5#

**16008**



尺寸Dim.(mm): 23.91\*5.12\*1.96  
克重N.W.(g): 1.00  
适用范围Apply:  
挂钩J-hook connector 3#

**16009**



尺寸Dim.(mm): 28.58\*5.81\*3.09  
克重N.W.(g): 1.93  
适用范围Apply:  
挂钩J-hook connector 3#

**16010**



尺寸Dim.(mm): 35.95\*11.16\*2.36  
克重N.W.(g): 3.00  
适用范围Apply:  
日字件Type connector 3# 5#

**16011**



尺寸Dim.(mm): 45.57\*4.11\*5.01  
克重N.W.(g): 10.09  
扭力Torsion(N.m): 1.1  
适用范围Apply: 直装Directly 8# 10#

**16012**



尺寸Dim.(mm): 27.64\*24.39\*2.95  
克重N.W.(g): 6.33  
适用范围Apply:  
挂钩J-hook connector 3# 5#

**16013**



尺寸Dim.(mm): 21.93\*7.55\*3.50  
克重N.W.(g): 2.69  
适用范围Apply:  
挂钩J-hook connector 3# 5#

**16014**



尺寸Dim.(mm): 22.08\*19.29\*1.99  
克重N.W.(g): 2.39  
适用范围Apply:  
挂钩J-hook connector 3# 5#

**16015**



尺寸Dim.(mm): 19.23\*21.23\*3.04  
克重N.W.(g): 3.36  
适用范围Apply:  
挂钩J-hook connector 3#

**16016**



尺寸Dim.(mm): 31.90\*9.19\*2.71  
克重N.W.(g): 3.29  
扭力Torsion(N.m): 0.55  
适用范围Apply: 直装Directly 5#



16017



尺寸Dim.(mm): 27.99\*8.79\*3.24  
克重N.W.(g): 1.93  
适用范围Apply:  
挂钩J-hook connector 3#

16018



尺寸Dim.(mm): 10.18\*5.79\*4.86  
克重N.W.(g): 0.59  
适用范围Apply:  
日字件Type connector 3# 5#

16019



尺寸Dim.(mm): 28.93\*9.46\*3.49  
克重N.W.(g): 3.52  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16020



尺寸Dim.(mm): 18.68\*10.95\*3.57  
克重N.W.(g): 2.40  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16021



尺寸Dim.(mm): 39.87\*9.90\*2.18  
克重N.W.(g): 3.56  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16022



尺寸Dim.(mm): 32.76\*12.76\*2.14  
克重N.W.(g): 4.29  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16023



尺寸Dim.(mm): 29.61\*8.20\*2.56  
克重N.W.(g): 2.40  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16024



尺寸Dim.(mm): 26.53\*13.44\*2.69  
克重N.W.(g): 2.90  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16025



尺寸Dim.(mm): 35.60\*7.20\*2.29  
克重N.W.(g): 2.96  
适用范围Apply:  
日字件Type connector 3# 5#

16026



尺寸Dim.(mm): 28.84\*10.02\*2.68  
克重N.W.(g): 2.07  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16027



尺寸Dim.(mm): 25.11\*5.08\*2.19  
克重N.W.(g): 1.45  
适用范围Apply:  
日字件Type connector 3# 5#

16028



尺寸Dim.(mm): 24.51\*5.08\*2.43  
克重N.W.(g): 1.53  
适用范围Apply:  
日字件Type connector 3# 5#

16029



尺寸Dim.(mm): 24.42\*7.32\*3.49  
克重N.W.(g): 1.86  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16030



尺寸Dim.(mm): 19.45\*4.86\*2.73  
克重N.W.(g): 0.85  
适用范围Apply:  
日字件Type connector 3# 5#

16031



尺寸Dim.(mm): 18.44\*10.00\*2.00  
克重N.W.(g): 0.61  
扭力Torsion(N.m): 0.2  
适用范围Apply: 直装Directly 3#

16032



尺寸Dim.(mm): 33.96\*12.01\*2.55  
克重N.W.(g): 1.90  
扭力Torsion(N.m): 0.6  
适用范围Apply: 直装Directly 5# 7# 8#  
象鼻头Non-lock

此图样只提供参考，部分图样是客户注册商标不得仿冒。

These drawing give reference only, part of the drawing is customer's trademarks, shall not be counterfeit.



16033



尺寸Dim.(mm): 21.52\*6.68\*1.94  
克重N.W.(g): 0.60  
扭力Torsion(N.m): 0.25  
适用范围Apply: 直装Directly 3#  
象鼻头Non-lock

16034



尺寸Dim.(mm): 20.19\*14.29\*1.87  
克重N.W.(g): 1.24  
扭力Torsion(N.m): 0.52  
适用范围Apply: 直装Directly 5#

16035



尺寸Dim.(mm): 21.67\*10.95\*3.04  
克重N.W.(g): 1.52  
扭力Torsion(N.m): 0.52  
适用范围Apply: 直装Directly 5#

16036



尺寸Dim.(mm): 23.19\*7.73\*2.33  
克重N.W.(g): 1.20  
扭力Torsion(N.m): 0.9  
适用范围Apply: 直装Directly 5#

16037



尺寸Dim.(mm): 20.78\*11.19\*2.33  
克重N.W.(g): 1.05  
扭力Torsion(N.m): 0.7  
适用范围Apply: 直装Directly 5#

16038



尺寸Dim.(mm): 23.09\*7.63\*2.27  
克重N.W.(g): 1.11  
扭力Torsion(N.m): 0.5  
适用范围Apply: 直装Directly 5#

16039



尺寸Dim.(mm): 20.84\*11.29\*2.49  
克重N.W.(g): 1.10  
扭力Torsion(N.m): 0.95  
适用范围Apply: 直装Directly 5#

16040



尺寸Dim.(mm): 36.50\*9.95\*2.35  
克重N.W.(g): 3.00  
适用范围Apply: 挂钩J-hook connector 3# 5#

16041



尺寸Dim.(mm): 18.78\*3.27\*2.91  
克重N.W.(g): 0.80  
适用范围Apply: 日字件Type connector 3# 5#

16042



尺寸Dim.(mm): 17.00\*6.62\*2.13  
克重N.W.(g): 0.84  
扭力Torsion(N.m): 0.73  
适用范围Apply: 直装Directly 3#

16043



尺寸Dim.(mm): 22.38\*9.92\*2.86  
克重N.W.(g): 2.31  
适用范围Apply: 挂钩J-hook connector 3# 5#

16044



尺寸Dim.(mm): 33.89\*11.34\*2.82  
克重N.W.(g): 3.17  
适用范围Apply: 挂钩J-hook connector 3# 5#

16045



尺寸Dim.(mm): 31.01\*12.62\*3.27  
克重N.W.(g): 2.78  
扭力Torsion(N.m): 0.80  
适用范围Apply: 直装Directly 5# 8#

16046



尺寸Dim.(mm): 20.65\*16.52\*2.90  
克重N.W.(g): 2.07  
适用范围Apply: 挂钩J-hook connector 3# 5#

16047



尺寸Dim.(mm): 24.35\*21.11\*3.40  
克重N.W.(g): 3.86  
适用范围Apply: 挂钩J-hook connector 3# 5#

16048



尺寸Dim.(mm): 25.60\*10.00\*4.48  
克重N.W.(g): 3.02  
适用范围Apply: 挂钩J-hook connector 3# 5#



16049



尺寸Dim.(mm): 22.72\*16.53\*4.06  
克重N.W.(g): 3.81  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16050



尺寸Dim.(mm): 32.70\*13.03\*3.44  
克重N.W.(g): 3.85  
扭力Torsion(N.m): 0.85  
适用范围Apply: 直装Directly 5# 7# 8#

16051



尺寸Dim.(mm): 24.37\*20.30\*3.64  
克重N.W.(g): 3.87  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16052



尺寸Dim.(mm): 25.92\*20.99\*2.17  
克重N.W.(g): 3.70  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16053



尺寸Dim.(mm): 25.22\*20.05\*1.85  
克重N.W.(g): 3.01  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16054



尺寸Dim.(mm): 15.66\*5.35\*1.46  
克重N.W.(g): 0.40  
扭力Torsion(N.m): 0.16  
适用范围Apply: 直装Directly 3#

16055



尺寸Dim.(mm): 23.13\*18.83\*2.89  
克重N.W.(g): 3.05  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16056



尺寸Dim.(mm): 25.62\*10.96\*2.47  
克重N.W.(g): 3.68  
适用范围Apply:  
挂钩J-hook connector 3#

16057



尺寸Dim.(mm): 26.21\*19.79\*2.91  
克重N.W.(g): 4.00  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16058



尺寸Dim.(mm): 22.68\*6.35\*2.56  
克重N.W.(g): 1.34  
适用范围Apply:  
挂钩J-hook connector 3#

16059



尺寸Dim.(mm): 28.95\*8.23\*2.75  
克重N.W.(g): 2.56  
适用范围Apply:  
挂钩J-hook connector 5#

16060



尺寸Dim.(mm): 3.70\*8.14\*3.53  
克重N.W.(g): 3.95  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16061




尺寸Dim.(mm): 25.80\*10.87\*2.39  
克重N.W.(g): 2.25  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16062




尺寸Dim.(mm): 29.05\*8.69\*3.65  
克重N.W.(g): 4.90  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16063

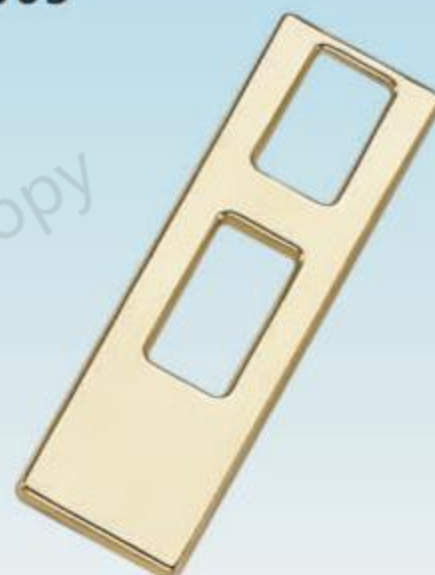

尺寸Dim.(mm): 34.87\*10.96\*2.06  
克重N.W.(g): 3.52  
扭力Torsion(N.m): 0.65  
适用范围Apply: 直装Directly 5#

16064

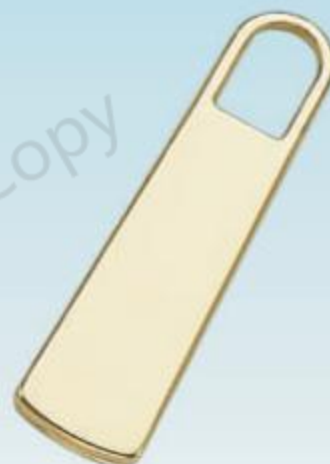

尺寸Dim.(mm): 30.83\*8.39\*1.94  
克重N.W.(g): 2.29  
适用范围Apply:  
挂钩J-hook connector 3# 5#



16065



尺寸Dim.(mm): 31.05\*12.05\*2.09  
克重N.W.(g): 4.06  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16066



尺寸Dim.(mm): 28.84\*8.93\*2.26  
克重N.W.(g): 2.18  
扭力Torsion(N.m): 0.83  
适用范围Apply: 直装Directly 5#

16067



尺寸Dim.(mm): 34.05\*8.78\*2.93  
克重N.W.(g): 2.52  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16068



尺寸Dim.(mm): 32.83\*27.24\*2.17  
克重N.W.(g): 4.28  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16069



尺寸Dim.(mm): 29.83\*7.12\*3.16  
克重N.W.(g): 2.28  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16070



尺寸Dim.(mm): 24.65\*11.83\*2.69  
克重N.W.(g): 2.12  
适用范围Apply:  
日字件Type connector 5#

16071



尺寸Dim.(mm): 20.07\*9.65\*2.40  
克重N.W.(g): 1.17  
适用范围Apply:  
日字件Type connector 3#

16072



尺寸Dim.(mm): 27.77\*8.90\*4.11  
克重N.W.(g): 4.32  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16073



尺寸Dim.(mm): 16.96\*9.16\*1.94  
克重N.W.(g): 0.49  
扭力Torsion(N.m): 0.19  
适用范围Apply: 直装Directly 3#

16074



尺寸Dim.(mm): 17.06\*9.15\*1.93  
克重N.W.(g): 0.55  
扭力Torsion(N.m): 0.2  
适用范围Apply: 直装Directly 3#

16075



尺寸Dim.(mm): 17.89\*7.17\*2.03  
克重N.W.(g): 0.59  
扭力Torsion(N.m): 0.29  
适用范围Apply: 直装Directly 3#

16076



尺寸Dim.(mm): 16.57\*6.16\*2.00  
克重N.W.(g): 0.40  
扭力Torsion(N.m): 0.2  
适用范围Apply: 直装Directly 3#

16077



尺寸Dim.(mm): 18.12\*7.80\*2.16  
克重N.W.(g): 0.60  
扭力Torsion(N.m): 0.38  
适用范围Apply: 直装Directly 3#

16078



尺寸Dim.(mm): 16.41\*6.96\*2.02  
克重N.W.(g): 0.50  
扭力Torsion(N.m): 0.29  
适用范围Apply: 直装Directly 3#

16079



尺寸Dim.(mm): 16.51\*6.22\*1.95  
克重N.W.(g): 0.39  
扭力Torsion(N.m): 0.45  
适用范围Apply: 直装Directly 3#

16080



尺寸Dim.(mm): 21.80\*8.73\*2.24  
克重N.W.(g): 0.84  
扭力Torsion(N.m): 0.66  
适用范围Apply: 直装Directly 5#



16081



尺寸Dim.(mm): 31.08\*9.55\*3.70  
克重N.W.(g): 3.10  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16082



尺寸Dim.(mm): 23.52\*9.45\*1.71  
克重N.W.(g): 1.02  
适用范围Apply:  
挂钩J-hook connector 3#

16083



尺寸Dim.(mm): 19.94\*20.04\*2.06  
克重N.W.(g): 3.11  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16084



尺寸Dim.(mm): 32.39\*8.47\*3.97  
克重N.W.(g): 3.24  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16085



尺寸Dim.(mm): 27.19\*8.77\*5.52  
克重N.W.(g): 3.12  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16086



尺寸Dim.(mm): 24.92\*8.78\*3.53  
克重N.W.(g): 2.44  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16087



尺寸Dim.(mm): 25.71\*10.13\*3.99  
克重N.W.(g): 2.86  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16088



尺寸Dim.(mm): 31.85\*11.89\*2.15  
克重N.W.(g): 2.78  
适用范围Apply:  
日字件Type connector 3# 5#

16089



尺寸Dim.(mm): 36.47\*6.99\*2.23  
克重N.W.(g): 2.39  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16090



尺寸Dim.(mm): 26.30\*20.79\*2.18  
克重N.W.(g): 2.03  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16091



尺寸Dim.(mm): 27.99\*7.88 3.44  
克重N.W.(g): 3.51  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16092



尺寸Dim.(mm): 35.69\*8.82\*8.97  
克重N.W.(g): 4.52  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16093



尺寸Dim.(mm): 19.38\*8.86\*3.60  
克重N.W.(g): 1.49  
扭力Torsion(N.m): 0.55  
适用范围Apply: 直装Directly 3#

16094



尺寸Dim.(mm): 25.86\*9.83\*1.97  
克重N.W.(g): 2.22  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16095



尺寸Dim.(mm): 23.37\*7.35\*2.91  
克重N.W.(g): 2.66  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16096



尺寸Dim.(mm): 26.53\*8.65\*2.61  
克重N.W.(g): 1.84  
适用范围Apply:  
挂钩J-hook connector 3# 5#



16097



尺寸Dim.(mm): 29.99\*14.82\*2.93  
克重N.W.(g): 5.35  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16098



尺寸Dim.(mm): 34.62\*13.80\*3.00  
克重N.W.(g): 2.60  
扭力Torsion(N.m): 0.6  
适用范围Apply: 直装Directly 5# 7#  
象鼻头Non-lock

16099



尺寸Dim.(mm): 19.22\*14.85\*3.16  
克重N.W.(g): 3.01  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16100



尺寸Dim.(mm): 21.59\*15.33\*2.48  
克重N.W.(g): 2.20  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16101



尺寸Dim.(mm): 20.00\*4.97\*3.10  
克重N.W.(g): 1.12  
适用范围Apply:  
挂钩J-hook connector 3#

16102



尺寸Dim.(mm): 19.60\*16.27\*5.21  
克重N.W.(g): 4.39  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16103



尺寸Dim.(mm): 28.29\*6.89\*3.38  
克重N.W.(g): 2.12  
适用范围Apply:  
日字件Type connector 3# 5#

16104



尺寸Dim.(mm): 23.75\*5.78\*2.92  
克重N.W.(g): 1.50  
适用范围Apply:  
日字件Type connector 3# 5#

16105



尺寸Dim.(mm): 26.61\*7.58\*2.70  
克重N.W.(g): 2.29  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16106



尺寸Dim.(mm): 58.62\*12.12\*2.59  
克重N.W.(g): 3.05  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16107



尺寸Dim.(mm): 26.05\*12.92\*5.68  
克重N.W.(g): 3.30  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16108



尺寸Dim.(mm): 34.81\*10.35\*2.54  
克重N.W.(g): 1.92  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16109



尺寸Dim.(mm): 26.90\*19.84\*4.51  
克重N.W.(g): 1.77  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16110



尺寸Dim.(mm): 36.34\*6.97\*2.23  
克重N.W.(g): 2.45  
扭力Torsion(N.m): 0.36  
适用范围Apply: 直装Directly 5#

16111



尺寸Dim.(mm): 28.00\*11.59\*2.05  
克重N.W.(g): 2.04  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16112



尺寸Dim.(mm): 20.82\*11.05\*3.19  
克重N.W.(g): 2.04  
适用范围Apply:  
日字件Type connector 3# 5#



16113



尺寸Dim.(mm): 25.80\*13.31\*2.18  
克重N.W.(g): 1.43  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16114



尺寸Dim.(mm): 29.92\*13.12\*3.03  
克重N.W.(g): 3.06  
扭力Torsion(N.m): 0.58  
适用范围Apply: 直装Directly 5#

16115



尺寸Dim.(mm): 24.50\*11.83\*2.21  
克重N.W.(g): 1.77  
扭力Torsion(N.m): 0.55  
适用范围Apply: 直装Directly 5#

16116



尺寸Dim.(mm): 23.20\*18.29\*2.72  
克重N.W.(g): 2.12  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16117



尺寸Dim.(mm): 24.06\*8.66\*2.24  
克重N.W.(g): 1.69  
扭力Torsion(N.m): 0.65  
适用范围Apply: 直装Directly 5#

16118



尺寸Dim.(mm): 29.32\*6.90\*2.90  
克重N.W.(g): 2.22  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16119



尺寸Dim.(mm): 29.29\*11.09\*3.35  
克重N.W.(g): 3.32  
扭力Torsion(N.m): 1.0  
适用范围Apply: 直装Directly 5#

16120



尺寸Dim.(mm): 34.11\*10.57\*5.07  
克重N.W.(g): 4.74  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16121



尺寸Dim.(mm): 26.79\*9.08\*4.31  
克重N.W.(g): 3.05  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16122



尺寸Dim.(mm): 27.15\*8.76\*1.89  
克重N.W.(g): 2.34  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16123



尺寸Dim.(mm): 38.88\*4.84\*3.09  
克重N.W.(g): 3.05  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16124



尺寸Dim.(mm): 40.34\*10.29\*2.36  
克重N.W.(g): 3.90  
扭力Torsion(N.m): 0.88  
适用范围Apply: 直装Directly 8#

16125



尺寸Dim.(mm): 28.59\*7.21\*1.84  
克重N.W.(g): 1.59  
扭力Torsion(N.m): 0.7  
适用范围Apply: 直装Directly 5#

16126



尺寸Dim.(mm): 38.36\*9.09\*3.52  
克重N.W.(g): 4.65  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16127



尺寸Dim.(mm): 31.41\*11.24\*1.55  
克重N.W.(g): 1.45  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16128



尺寸Dim.(mm): 32.56\*15.23\*2.25  
克重N.W.(g): 3.58  
适用范围Apply:  
挂钩J-hook connector 3# 5#



**16129**



尺寸Dim.(mm): 28.64\*7.32\*3.17  
克重N.W.(g): 1.96  
适用范围Apply:  
挂钩J-hook connector 3# 5#

**16130**



尺寸Dim.(mm): 22.88\*11.42\*2.43  
克重N.W.(g): 1.64  
适用范围Apply:  
挂钩J-hook connector 3# 5#

**16131**



尺寸Dim.(mm): 25.03\*6.63\*2.43  
克重N.W.(g): 1.68  
适用范围Apply:  
挂钩J-hook connector 3# 5#

**16132**



尺寸Dim.(mm): 24.42\*7.30\*5.79  
克重N.W.(g): 2.98  
适用范围Apply:  
挂钩J-hook connector 3# 5#

**16133**



尺寸Dim.(mm): 21.00\*6.71\*3.14  
克重N.W.(g): 1.74  
扭力Torsion(N.m): 0.8  
适用范围Apply: 直装Directly 3#

**16134**



尺寸Dim.(mm): 23.34\*6.96\*2.27  
克重N.W.(g): 1.21  
适用范围Apply:  
挂钩J-hook connector 3#

**16135**



尺寸Dim.(mm): 18.42\*8.24\*1.41  
克重N.W.(g): 0.65  
扭力Torsion(N.m): 0.56  
适用范围Apply: 直装Directly 3#

**16136**



尺寸Dim.(mm): 21.64\*8.58\*1.72  
克重N.W.(g): 0.88  
扭力Torsion(N.m): 0.75  
适用范围Apply: 直装Directly 5#

**16137**



尺寸Dim.(mm): 29.72\*9.09\*2.69  
克重N.W.(g): 2.59  
适用范围Apply:  
挂钩J-hook connector 3# 5#

**16138**



尺寸Dim.(mm): 32.15\*4.56\*2.98  
克重N.W.(g): 2.42  
适用范围Apply:  
挂钩J-hook connector 3# 5#

**16139**



尺寸Dim.(mm): 28.10\*9.10\*2.30  
克重N.W.(g): 2.20  
扭力Torsion(N.m): 0.65  
适用范围Apply: 直装Directly 5#

**16140**



尺寸Dim.(mm): 28.05\*8.06\*1.84  
克重N.W.(g): 2.18  
扭力Torsion(N.m): 0.65  
适用范围Apply: 直装Directly 5#

**16141**



尺寸Dim.(mm): 31.10\*10.70\*3.72  
克重N.W.(g): 4.33  
适用范围Apply:  
挂钩J-hook connector 3# 5#

**16142**



尺寸Dim.(mm): 22.99\*7.35\*2.13  
克重N.W.(g): 1.23  
扭力Torsion(N.m): 0.58  
适用范围Apply: 直装Directly 3#

**16143**



尺寸Dim.(mm): 36.27\*6.80\*2.08  
克重N.W.(g): 2.50  
扭力Torsion(N.m): 0.45  
适用范围Apply: 直装Directly 3#

**16144**



尺寸Dim.(mm): 24.56\*12.97\*2.14  
克重N.W.(g): 2.33  
适用范围Apply:  
挂钩J-hook connector 3# 5#



16145



尺寸Dim.(mm): 37.83\*8.35\*3.98  
克重N.W.(g): 4.52  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16146



尺寸Dim.(mm): 13.53\*11.22\*1.57  
克重N.W.(g): 0.52  
适用范围Apply: 直装Directly 5#

16147



尺寸Dim.(mm): 20.89\*7.06\*2.83  
克重N.W.(g): 1.55  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16148



尺寸Dim.(mm): 30.05\*8.10\*2.14  
克重N.W.(g): 2.46  
扭力Torsion(N.m): 0.75  
适用范围Apply: 直装Directly 5#

16149



尺寸Dim.(mm): 30.38\*9.16\*3.16  
克重N.W.(g): 2.74  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16150



尺寸Dim.(mm): 43.72\*5.81\*3.39  
克重N.W.(g): 3.71  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16151



尺寸Dim.(mm): 28.92\*6.28\*3.87  
克重N.W.(g): 2.33  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16152



尺寸Dim.(mm): 18.08\*6.16\*2.38  
克重N.W.(g): 0.59  
扭力Torsion(N.m): 0.33  
适用范围Apply: 直装Directly 3#

16153



尺寸Dim.(mm): 15.19\*13.84\*1.86  
克重N.W.(g): 0.83  
扭力Torsion(N.m): 0.6  
适用范围Apply: 直装Directly 5#

16154



尺寸Dim.(mm): 29.50\*10.25\*4.42  
克重N.W.(g): 2.90  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16155



尺寸Dim.(mm): 22.11\*7.58\*3.56  
克重N.W.(g): 1.38  
适用范围Apply:  
挂钩J-hook connector 3#

16156



尺寸Dim.(mm): 31.15\*9.78\*3.40  
克重N.W.(g): 3.14  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16157



尺寸Dim.(mm): 24.41\*7.52\*3.45  
克重N.W.(g): 1.90  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16158



尺寸Dim.(mm): 30.99\*9.69\*3.89  
克重N.W.(g): 3.25  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16159



尺寸Dim.(mm): 23.08\*17.56\*2.05  
克重N.W.(g): 3.12  
适用范围Apply:  
日字件Type connector 3# 5#

16160



尺寸Dim.(mm): 28.60\*9.42\*3.49  
克重N.W.(g): 3.24  
适用范围Apply:  
挂钩J-hook connector 3# 5#



16161



尺寸Dim.(mm): 31.13\*9.59\*3.60  
克重N.W.(g): 3.11  
适用范围Apply:  
挂钩J-hook connector 5#

16162



尺寸Dim.(mm): 24.21\*7.48\*3.54  
克重N.W.(g): 1.67  
适用范围Apply:  
挂钩J-hook connector 3#

16163



尺寸Dim.(mm): 28.87\*12.49\*2.81  
克重N.W.(g): 2.10  
扭力Torsion(N.m): 0.55  
适用范围Apply: 直装Directly 5#

16164



尺寸Dim.(mm): 42.13\*9.91\*2.19  
克重N.W.(g): 2.55  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16165



尺寸Dim.(mm): 40.04\*10.13\*2.18  
克重N.W.(g): 2.68  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16166



尺寸Dim.(mm): 38.35\*9.32\*3.48  
克重N.W.(g): 5.38  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16167



尺寸Dim.(mm): 30.96\*13.28\*2.13  
克重N.W.(g): 2.90  
扭力Torsion(N.m): 1.45  
适用范围Apply: 直装Directly 5#

16168



尺寸Dim.(mm): 31.19\*9.65\*3.67  
克重N.W.(g): 3.21  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16169



尺寸Dim.(mm): 29.09\*7.07\*2.09  
克重N.W.(g): 2.08  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16170



尺寸Dim.(mm): 26.68\*9.38\*2.66  
克重N.W.(g): 2.74  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16171



尺寸Dim.(mm): 29.99\*11.58\*3.26  
克重N.W.(g): 3.23  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16172



尺寸Dim.(mm): 29.65\*7.00\*2.88  
克重N.W.(g): 1.64  
适用范围Apply:  
日字件Type connector 3# 5#

16173



尺寸Dim.(mm): 38.10\*8.40\*2.00  
克重N.W.(g): 2.91  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16174



尺寸Dim.(mm): 22.79\*17.32\*2.25  
克重N.W.(g): 3.23  
适用范围Apply:  
日字件Type connector 3# 5#

16175



尺寸Dim.(mm): 29.80\*8.33\*2.30  
克重N.W.(g): 2.34  
扭力Torsion(N.m): 0.85  
适用范围Apply: 直装Directly 5#

16176



尺寸Dim.(mm): 24.90\*20.01\*1.56  
克重N.W.(g): 3.06  
适用范围Apply:  
挂钩J-hook connector 3# 5#



16177



尺寸Dim.(mm): 24.00\*7.29\*2.04  
克重N.W.(g): 1.52  
扭力Torsion(N.m): 0.46  
适用范围Apply: 直装Directly 5#

16178



尺寸Dim.(mm): 27.17\*15.35\*1.89  
克重N.W.(g): 1.99  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16179



尺寸Dim.(mm): 27.96\*11.93\*2.09  
克重N.W.(g): 2.34  
扭力Torsion(N.m): 0.85  
适用范围Apply: 直装Directly 5#

16180



尺寸Dim.(mm): 20.84\*8.75\*2.45  
克重N.W.(g): 1.20  
扭力Torsion(N.m): 0.6  
适用范围Apply: 直装Directly 3#

16181



尺寸Dim.(mm): 14.03\*10.07\*1.88  
克重N.W.(g): 0.79  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16182



尺寸Dim.(mm): 14.03\*10.10\*2.19  
克重N.W.(g): 0.81  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16183



尺寸Dim.(mm): 24.15\*10.00\*1.86  
克重N.W.(g): 1.00  
扭力Torsion(N.m): 0.3  
适用范围Apply: 直装Directly 3#

16184



尺寸Dim.(mm): 28.03\*12.09\*3.43  
克重N.W.(g): 2.95  
扭力Torsion(N.m): 0.88  
适用范围Apply: 直装Directly 5# 8#

16185



尺寸Dim.(mm): 15.95\*8.41\*1.65  
克重N.W.(g): 0.32  
扭力Torsion(N.m): 0.35  
适用范围Apply: 直装Directly 3#  
象鼻头Non-lock

16186



尺寸Dim.(mm): 28.82\*12.04\*2.12  
克重N.W.(g): 2.25  
扭力Torsion(N.m): 0.45  
适用范围Apply: 直装Directly 5#

16187



尺寸Dim.(mm): 22.57\*17.10\*2.86  
克重N.W.(g): 2.73  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16188



尺寸Dim.(mm): 36.65\*10.20\*1.76  
克重N.W.(g): 3.67  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16189



尺寸Dim.(mm): 34.91\*16.21\*2.08  
克重N.W.(g): 4.02  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16190



尺寸Dim.(mm): 29.91\*14.83\*3.04  
克重N.W.(g): 3.19  
扭力Torsion(N.m): 0.5  
适用范围Apply: 直装Directly 5#

16191



尺寸Dim.(mm): 26.26\*11.48\*3.67  
克重N.W.(g): 3.43  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16192



尺寸Dim.(mm): 27.81\*11.77\*2.15  
克重N.W.(g): 2.21  
扭力Torsion(N.m): 0.6  
适用范围Apply: 直装Directly 5#



**16193**



尺寸Dim.(mm): 33.94\*9.63\*2.74  
克重N.W.(g): 3.73  
扭力Torsion(N.m): 1.05  
适用范围Apply: 直装Directly 5#

**16194**



尺寸Dim.(mm): 26.58\*15.29\*4.22  
克重N.W.(g): 5.18  
适用范围Apply: 挂钩J-hook connector 3# 5#

**16195**



尺寸Dim.(mm): 39.66\*11.60\*2.77  
克重N.W.(g): 2.44  
适用范围Apply: 挂钩J-hook connector 3# 5#

**16196**



尺寸Dim.(mm): 30.99\*9.43\*3.72  
克重N.W.(g): 3.21  
适用范围Apply: 挂钩J-hook connector 3# 5#

**16197**



尺寸Dim.(mm): 30.15\*8.90\*2.90  
克重N.W.(g): 1.86  
适用范围Apply: 挂钩J-hook connector 3# 5#

**16198**



尺寸Dim.(mm): 21.22\*7.30\*4.37  
克重N.W.(g): 1.58  
适用范围Apply: 挂钩J-hook connector 3#

**16199**



尺寸Dim.(mm): 25.51\*8.81\*5.02  
克重N.W.(g): 2.58  
适用范围Apply: 挂钩J-hook connector 3# 5#

**16200**



尺寸Dim.(mm): 39.53\*9.76\*3.65  
克重N.W.(g): 5.04  
适用范围Apply: 挂钩J-hook connector 3# 5#

**16201**



尺寸Dim.(mm): 30.87\*9.42\*3.73  
克重N.W.(g): 3.23  
适用范围Apply: 挂钩J-hook connector 3# 5#

**16202**



尺寸Dim.(mm): 28.89\*12.48\*3.85  
克重N.W.(g): 4.70  
适用范围Apply: 挂钩J-hook connector 3# 5#

**16203**



尺寸Dim.(mm): 26.26\*9.73\*4.26  
克重N.W.(g): 2.38  
适用范围Apply: 挂钩J-hook connector 3#

**16204**



尺寸Dim.(mm): 30.15\*8.96\*3.65  
克重N.W.(g): 2.21  
适用范围Apply: 挂钩J-hook connector 3# 5#

**16205**



尺寸Dim.(mm): 32.90\*9.10\*4.38  
克重N.W.(g): 3.71  
适用范围Apply: 挂钩J-hook connector 3# 5#

**16206**



尺寸Dim.(mm): 36.46\*12.20\*2.13  
克重N.W.(g): 3.49  
扭力Torsion(N.m): 0.42  
适用范围Apply: 直装Directly 5#

**16207**



尺寸Dim.(mm): 37.00\*11.02\*3.09  
克重N.W.(g): 4.97  
适用范围Apply: 挂钩J-hook connector 3# 5#

**16208**



尺寸Dim.(mm): 26.40\*9.28\*2.61  
克重N.W.(g): 2.67  
适用范围Apply: 挂钩J-hook connector 3# 5#



16209



尺寸Dim.(mm): 22.71\*13.65\*2.19  
克重N.W.(g): 1.90  
扭力Torsion(N.m): 0.5  
适用范围Apply: 直装Directly 3#  
挂钩J-hook connector 3# 5#

16210



尺寸Dim.(mm): 24.31\*4.76\*4.06  
克重N.W.(g): 2.20  
适用范围Apply:  
挂钩J-hook connector 3#

16211



尺寸Dim.(mm): 35.13\*8.29\*2.46  
克重N.W.(g): 3.00  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16212



尺寸Dim.(mm): 20.39\*10.03\*1.82  
克重N.W.(g): 0.77  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16213



尺寸Dim.(mm): 21.94\*18.29\*2.08  
克重N.W.(g): 1.90  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16214



尺寸Dim.(mm): 33.16\*10.64\*2.19  
克重N.W.(g): 2.82  
扭力Torsion(N.m): 1.1  
适用范围Apply: 直装Directly 8#

16215



尺寸Dim.(mm): 19.83\*13.54\*2.58  
克重N.W.(g): 1.76  
适用范围Apply:  
日字件Type connector 3# 5#

16216



尺寸Dim.(mm): 31.94\*7.98\*1.53  
克重N.W.(g): 1.87  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16217



尺寸Dim.(mm): 32.70\*8.67\*2.81  
克重N.W.(g): 3.19  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16218



尺寸Dim.(mm): 26.67\*12.09\*1.72  
克重N.W.(g): 2.03  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16219



尺寸Dim.(mm): 25.62\*11.03\*2.90  
克重N.W.(g): 1.99  
扭力Torsion(N.m): 0.80  
适用范围Apply: 直装Directly 5#

16220



尺寸Dim.(mm): 34.86\*15.97\*2.13  
克重N.W.(g): 4.64  
扭力Torsion(N.m): 1.7  
适用范围Apply: 直装Directly 8#

16221



尺寸Dim.(mm): 38.09\*14.00\*2.09  
克重N.W.(g): 4.71  
扭力Torsion(N.m): 1.65  
适用范围Apply: 直装Directly 8#

16222



尺寸Dim.(mm): 38.07\*14.00\*2.01  
克重N.W.(g): 4.60  
扭力Torsion(N.m): 1.60  
适用范围Apply: 直装Directly 8#

16223



尺寸Dim.(mm): 25.04\*8.98\*2.62  
克重N.W.(g): 1.92  
扭力Torsion(N.m): 1.27  
适用范围Apply: 直装Directly 5#

16224



尺寸Dim.(mm): 21.24\*6.23\*2.33  
克重N.W.(g): 1.22  
扭力Torsion(N.m): 0.37  
适用范围Apply: 直装Directly 3#



16225



尺寸Dim.(mm): 21.22\*6.55\*2.31  
克重N.W.(g): 1.46  
适用范围Apply:  
挂钩J-hook connector 3#

16226



尺寸Dim.(mm): 24.00\*9.03\*2.17  
克重N.W.(g): 1.51  
扭力Torsion(N.m): 0.8  
适用范围Apply: 直装Directly 5#

16227



尺寸Dim.(mm): 25.12\*10.06\*1.94  
克重N.W.(g): 2.37  
扭力Torsion(N.m): 0.82  
适用范围Apply: 直装Directly 5#

16228



尺寸Dim.(mm): 22.10\*12.37\*2.02  
克重N.W.(g): 1.54  
扭力Torsion(N.m): 0.65  
适用范围Apply: 直装Directly 5#

16229



尺寸Dim.(mm): 25.52\*11.11\*2.38  
克重N.W.(g): 2.37  
扭力Torsion(N.m): 0.45  
适用范围Apply: 直装Directly 3#

16230



尺寸Dim.(mm): 21.12\*15.78\*2.57  
克重N.W.(g): 4.25  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16231



尺寸Dim.(mm): 19.20\*11.26\*2.16  
克重N.W.(g): 0.71  
扭力Torsion(N.m): 1.0  
适用范围Apply: 直装Directly 3# 5#  
象鼻头Non-lock

16232



尺寸Dim.(mm): 23.66\*17.79\*2.28  
克重N.W.(g): 3.68  
适用范围Apply:  
日字件Type connector 3# 5#

16233



尺寸Dim.(mm): 32.97\*9.38\*3.61  
克重N.W.(g): 5.92  
适用范围Apply:  
日字件Type connector 3# 5#

16234



尺寸Dim.(mm): 27.01\*7.90\*2.45  
克重N.W.(g): 2.87  
适用范围Apply:  
日字件Type connector 3# 5#

16235



尺寸Dim.(mm): 23.69\*17.75\*2.32  
克重N.W.(g): 3.71  
适用范围Apply:  
日字件Type connector 3# 5#

16236



尺寸Dim.(mm): 25.17\*8.99\*1.92  
克重N.W.(g): 2.22  
扭力Torsion(N.m): 0.83  
适用范围Apply: 直装Directly 5#

16237



尺寸Dim.(mm): 20.16\*9.65\*2.15  
克重N.W.(g): 1.54  
扭力Torsion(N.m): 0.55  
适用范围Apply: 直装Directly 3#

16238



尺寸Dim.(mm): 36.16\*10.12\*2.12  
克重N.W.(g): 4.18  
扭力Torsion(N.m): 1.1  
适用范围Apply: 直装Directly 5#

16239



尺寸Dim.(mm): 41.54\*11.56\*2.20  
克重N.W.(g): 5.47  
扭力Torsion(N.m): 1.6  
适用范围Apply: 直装Directly 8#

16240



尺寸Dim.(mm): 37.25\*14.42\*4.93  
克重N.W.(g): 8.14  
适用范围Apply:  
挂钩J-hook connector 3# 5#



16241



尺寸Dim.(mm): 40.23\*9.13\*2.12  
克重N.W.(g): 2.83  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16242



尺寸Dim.(mm): 21.55\*16.67\*4.73  
克重N.W.(g): 6.16  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16243



尺寸Dim.(mm): 27.82\*15.98\*2.11  
克重N.W.(g): 2.57  
扭力Torsion(N.m): 1.0  
适用范围Apply: 直装Directly 5#

16244



尺寸Dim.(mm): 28.18\*10.61\*2.16  
克重N.W.(g): 2.09  
扭力Torsion(N.m): 1.4  
适用范围Apply: 直装Directly 8#

16245



尺寸Dim.(mm): 25.18\*7.71\*2.19  
克重N.W.(g): 1.29  
扭力Torsion(N.m): 0.75  
适用范围Apply: 直装Directly 5#

16246



尺寸Dim.(mm): 38.00\*15.23\*2.10  
克重N.W.(g): 6.26  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16247



尺寸Dim.(mm): 25.40\*12.14\*2.17  
克重N.W.(g): 2.17  
扭力Torsion(N.m): 0.8  
适用范围Apply: 直装Directly 8#

16248



尺寸Dim.(mm): 20.37\*9.82\*2.03  
克重N.W.(g): 1.28  
扭力Torsion(N.m): 0.8  
适用范围Apply: 直装Directly 5#

16249



尺寸Dim.(mm): 22.09\*12.38\*1.99  
克重N.W.(g): 1.56  
扭力Torsion(N.m): 0.6  
适用范围Apply: 直装Directly 5#

16250



尺寸Dim.(mm): 33.21\*15.06\*2.10  
克重N.W.(g): 3.28  
扭力Torsion(N.m): 1.2  
适用范围Apply: 直装Directly 8#

16251



尺寸Dim.(mm): 26.15\*15.12\*2.16  
克重N.W.(g): 2.84  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16252



尺寸Dim.(mm): 31.42\*9.19\*2.43  
克重N.W.(g): 3.49  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16253



尺寸Dim.(mm): 30.38\*7.36\*3.53  
克重N.W.(g): 3.20  
适用范围Apply:  
挂钩J-hook connector 3#

16254



尺寸Dim.(mm): 37.76\*9.25\*3.85  
克重N.W.(g): 5.95  
适用范围Apply:  
挂钩J-hook connector 5#

16255



尺寸Dim.(mm): 30.00\*9.83\*2.68  
克重N.W.(g): 2.59  
扭力Torsion(N.m): 0.55  
适用范围Apply: 直装Directly 5#

16256



尺寸Dim.(mm): 25.88\*6.63\*3.63  
克重N.W.(g): 2.00  
适用范围Apply:  
挂钩J-hook connector 3#



16257



尺寸Dim.(mm): 32.16\*8.32\*4.41  
克重N.W.(g): 3.72  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16258



尺寸Dim.(mm): 21.33\*12.03\*1.62  
克重N.W.(g): 1.15  
扭力Torsion(N.m): 0.65  
适用范围Apply: 直装Directly 5#

16259



尺寸Dim.(mm): 24.40\*19.91\*2.40  
克重N.W.(g): 4.52  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16260



尺寸Dim.(mm): 26.95\*15.27\*2.13  
克重N.W.(g): 2.62  
扭力Torsion(N.m): 1.15  
适用范围Apply: 直装Directly 5#

16261



尺寸Dim.(mm): 28.32\*6.57\*3.30  
克重N.W.(g): 1.29  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16262



尺寸Dim.(mm): 20.48\*8.46\*1.90  
克重N.W.(g): 1.21  
扭力Torsion(N.m): 0.55  
适用范围Apply: 直装Directly 3#

16263



尺寸Dim.(mm): 25.50\*9.99\*2.00  
克重N.W.(g): 1.73  
扭力Torsion(N.m): 0.55  
适用范围Apply: 直装Directly 5#

16264



尺寸Dim.(mm): 37.26\*13.22\*2.17  
克重N.W.(g): 4.45  
扭力Torsion(N.m): 1.34  
适用范围Apply: 直装Directly 8#

16265



尺寸Dim.(mm): 25.87\*14.56\*1.95  
克重N.W.(g): 2.14  
扭力Torsion(N.m): 1.47  
适用范围Apply: 直装Directly 8#

16266



尺寸Dim.(mm): 30.69\*8.51\*2.34  
克重N.W.(g): 3.45  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16267



尺寸Dim.(mm): 35.45\*13.44\*3.25  
克重N.W.(g): 5.72  
扭力Torsion(N.m): 1.7  
适用范围Apply: 直装Directly 8#

16268



尺寸Dim.(mm): 35.46\*8.82\*3.78  
克重N.W.(g): 4.48  
适用范围Apply:  
挂钩J-hook connector 5#

16269



尺寸Dim.(mm): 39.60\*8.42\*3.02  
克重N.W.(g): 4.95  
扭力Torsion(N.m): 0.35  
适用范围Apply: 直装Directly 5#

16270



尺寸Dim.(mm): 29.85\*7.07\*3.64  
克重N.W.(g): 2.77  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16271



尺寸Dim.(mm): 23.05\*9.45\*1.89  
克重N.W.(g): 1.77  
扭力Torsion(N.m): 0.85  
适用范围Apply: 直装Directly 5#

16272



尺寸Dim.(mm): 31.78\*18.88\*2.06  
克重N.W.(g): 3.66  
扭力Torsion(N.m): 1.6  
适用范围Apply: 直装Directly 8#



16273



尺寸Dim.(mm): 35.26\*7.04\*1.95  
克重N.W.(g): 2.23  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16274



尺寸Dim.(mm): 27.02\*19.69\*2.48  
克重N.W.(g): 5.20  
适用范围Apply:  
日字件Type connector 3# 5#

16275



尺寸Dim.(mm): 25.06\*14.10\*1.89  
克重N.W.(g): 2.51  
扭力Torsion(N.m): 1.00  
适用范围Apply: 直装Directly 8#

16276



尺寸Dim.(mm): 27.57\*9.31\*2.17  
克重N.W.(g): 2.49  
扭力Torsion(N.m): 0.91  
适用范围Apply: 直装Directly 5#

16277



尺寸Dim.(mm): 23.11\*10.92\*1.70  
克重N.W.(g): 1.68  
扭力Torsion(N.m): 0.63  
适用范围Apply: 直装Directly 5#

16278



尺寸Dim.(mm): 31.52\*15.20\*2.14  
克重N.W.(g): 4.18  
扭力Torsion(N.m): 1.28  
适用范围Apply: 直装Directly 8#

16279



尺寸Dim.(mm): 29.14\*8.17\*3.09  
克重N.W.(g): 2.37  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16280



尺寸Dim.(mm): 28.61\*6.03\*2.18  
克重N.W.(g): 1.78  
适用范围Apply:  
日字件Type connector 3# 5#

16281



尺寸Dim.(mm): 24.01\*8.10\*2.06  
克重N.W.(g): 2.10  
适用范围Apply:  
日字件Type connector 3# 5#

16282



尺寸Dim.(mm): 20.52\*9.00\*2.93  
克重N.W.(g): 1.41  
扭力Torsion(N.m): 0.60  
适用范围Apply: 直装Directly 3#

16283



尺寸Dim.(mm): 24.85\*13.99\*2.83  
克重N.W.(g): 3.23  
扭力Torsion(N.m): 1.55  
适用范围Apply: 直装Directly 5#

16284



尺寸Dim.(mm): 26.24\*15.39\*3.06  
克重N.W.(g): 2.02  
扭力Torsion(N.m): 1.10  
适用范围Apply: 直装Directly 8#

16285



尺寸Dim.(mm): 31.48\*10.88\*2.02  
克重N.W.(g): 2.50  
扭力Torsion(N.m): 1.00  
适用范围Apply: 直装Directly 8#

16286



尺寸Dim.(mm): 23.14\*8.67\*3.59  
克重N.W.(g): 2.02  
扭力Torsion(N.m): 0.58  
适用范围Apply: 直装Directly 5#

160287



尺寸Dim.(mm): 20.66\*8.27\*3.01  
克重N.W.(g): 1.27  
扭力Torsion(N.m): 0.62  
适用范围Apply: 直装Directly 3#

16288



尺寸Dim.(mm): 31.36\*12.09\*1.91  
克重N.W.(g): 2.35  
适用范围Apply:  
挂钩J-hook connector 3# 5#



16289



尺寸Dim.(mm): 40.08\*15.74\*6.50  
克重N.W.(g): 9.68  
适用范围Apply:  
挂钩J-hook connector 5# 8#

16290



尺寸Dim.(mm): 28.90\*6.59\*3.91  
克重N.W.(g): 2.46  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16291



尺寸Dim.(mm): 25.92\*7.08\*2.83  
克重N.W.(g): 2.75  
适用范围Apply:  
日字件Type connector 3# 5#

16292



尺寸Dim.(mm): 31.44\*11.08\*2.64  
克重N.W.(g): 2.31  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16293



尺寸Dim.(mm): 27.34\*8.70\*1.84  
克重N.W.(g): 1.88  
扭力Torsion(N.m): 0.65  
适用范围Apply: 直装Directly 5#

16294



尺寸Dim.(mm): 24.30\*10.35\*2.36  
克重N.W.(g): 1.30  
扭力Torsion(N.m): 0.5  
适用范围Apply: 直装Directly 5#

16295



尺寸Dim.(mm): 33.08\*6.75\*2.16  
克重N.W.(g): 2.23  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16296



尺寸Dim.(mm): 37.96\*8.77\*4.29  
克重N.W.(g): 5.16  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16297



尺寸Dim.(mm): 26.11\*11.87\*3.72  
克重N.W.(g): 2.41  
扭力Torsion(N.m): 0.60  
适用范围Apply: 直装Directly 5#

16298



尺寸Dim.(mm): 21.00\*6.71\*1.99  
克重N.W.(g): 1.74  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16299



尺寸Dim.(mm): 23.34\*6.96\*2.51  
克重N.W.(g): 1.21  
扭力Torsion(N.m): 0.55  
适用范围Apply: 直装Directly 3#

16300



尺寸Dim.(mm): 18.42\*8.24\*2.34  
克重N.W.(g): 3.05  
扭力Torsion(N.m): 0.65  
适用范围Apply: 直装Directly 5#

16301



尺寸Dim.(mm): 20.29\*11.00\*1.80  
克重N.W.(g): 1.46  
扭力Torsion(N.m): 0.7  
适用范围Apply: 直装Directly 5#

16302



尺寸Dim.(mm): 20.06\*16.75\*1.77  
克重N.W.(g): 1.55  
扭力Torsion(N.m): 0.47  
适用范围Apply: 直装Directly 5#

16303



尺寸Dim.(mm): 33.48\*24.35\*2.00  
克重N.W.(g): 1.92  
适用范围Apply:  
直装Directly 5#

16304



尺寸Dim.(mm): 25.14\*8.24\*3.48  
克重N.W.(g): 2.54  
适用范围Apply:  
挂钩J-hook connector 3#



16305



尺寸Dim.(mm): 19.07\*13.42\*2.21  
克重N.W.(g): 0.94  
扭力Torsion(N.m): 0.4  
适用范围Apply: 直装Directly 3#

16306



尺寸Dim.(mm): 27.02\*11.43\*2.07  
克重N.W.(g): 2.63  
扭力Torsion(N.m): 1.0  
适用范围Apply: 直装Directly 5#

16307



尺寸Dim.(mm): 23.07\*9.47\*1.91  
克重N.W.(g): 1.83  
扭力Torsion(N.m): 1.0  
适用范围Apply: 直装Directly 5#

16308



尺寸Dim.(mm): 20.27\*9.24\*2.92  
克重N.W.(g): 1.23  
扭力Torsion(N.m): 0.78  
适用范围Apply: 直装Directly 3#

16309



尺寸Dim.(mm): 31.51\*15.43\*2.24  
克重N.W.(g): 4.93  
扭力Torsion(N.m): 1.45  
适用范围Apply: 直装Directly 8#

16310



尺寸Dim.(mm): 26.17\*12.05\*3.73  
克重N.W.(g): 2.56  
适用范围Apply: 挂钩J-hook connector 3# 5#

16311



尺寸Dim.(mm): 21.62\*11.31\*3.05  
克重N.W.(g): 2.25  
扭力Torsion(N.m): 0.65  
适用范围Apply: 直装Directly 3#

16312



尺寸Dim.(mm): 24.84\*12.84\*3.21  
克重N.W.(g): 3.76  
扭力Torsion(N.m): 1.0  
适用范围Apply: 直装Directly 5#

16313



尺寸Dim.(mm): 34.65\*8.75\*1.96  
克重N.W.(g): 3.07  
适用范围Apply: 挂钩J-hook connector 3# 5#

16314



尺寸Dim.(mm): 39.80\*9.89\*3.97  
克重N.W.(g): 5.88  
扭力Torsion(N.m): 0.85  
适用范围Apply: 直装Directly 5#

16315



尺寸Dim.(mm): 38.02\*14.46\*3.97  
克重N.W.(g): 4.29  
扭力Torsion(N.m): 0.35  
适用范围Apply: 直装Directly 5#

16316



尺寸Dim.(mm): 24.49\*6.52\*3.40  
克重N.W.(g): 1.63  
适用范围Apply: 挂钩J-hook connector 3#

16317



尺寸Dim.(mm): 31.47\*15.18\*4.30  
克重N.W.(g): 4.16  
扭力Torsion(N.m): 1.20  
适用范围Apply: 直装Directly 8#

16318



尺寸Dim.(mm): 24.49\*10.22\*3.18  
克重N.W.(g): 1.98  
扭力Torsion(N.m): 0.75  
适用范围Apply: 直装Directly 5#

16319



尺寸Dim.(mm): 29.01\*16.01\*4.57  
克重N.W.(g): 4.92  
扭力Torsion(N.m): 1.80  
适用范围Apply: 直装Directly 8#

16320



尺寸Dim.(mm): 29.82\*12.32\*4.68  
克重N.W.(g): 3.59  
适用范围Apply: 挂钩J-hook connector 3# 5#



16321



尺寸Dim.(mm): 24.59\*12.76\*3.29  
克重N.W.(g): 3.97  
适用范围Apply: 旋转头Rotating 5#

16322



尺寸Dim.(mm): 22.71\*9.39\*2.23  
克重N.W.(g): 1.41  
适用范围Apply: 挂钩J-hook connector 3# 5#

16323



尺寸Dim.(mm): 25.00\*11.70\*1.69  
克重N.W.(g): 1.91  
适用范围Apply: 挂钩J-hook connector 5#

16324



尺寸Dim.(mm): 19.91\*9.77\*1.57  
克重N.W.(g): 1.23  
适用范围Apply: 挂钩J-hook connector 3#

16325



尺寸Dim.(mm): 34.25\*11.11\*2.35  
克重N.W.(g): 4.73  
扭力Torsion(N.m): 1.35  
适用范围Apply: 直装Directly 8#

16326



尺寸Dim.(mm): 26.34\*23.10\*2.27  
克重N.W.(g): 2.33  
适用范围Apply: 挂钩J-hook connector 3# 5#

16327



尺寸Dim.(mm): 22.08\*7.59\*2.77  
克重N.W.(g): 1.88  
适用范围Apply: 挂钩J-hook connector 3#

16328



尺寸Dim.(mm): 18.10\*15.15\*2.33  
克重N.W.(g): 2.47  
适用范围Apply: 挂钩J-hook connector 3#

16329



尺寸Dim.(mm): 30.11\*7.13\*2.97  
克重N.W.(g): 2.73  
适用范围Apply: 挂钩J-hook connector 3# 5#

16330



尺寸Dim.(mm): 30.29\*12.96\*4.52  
克重N.W.(g): 3.50  
适用范围Apply: 挂钩J-hook connector 3# 5#

16331



尺寸Dim.(mm): 22.99\*11.05\*1.69  
克重N.W.(g): 1.66  
扭力Torsion(N.m): 0.75  
适用范围Apply: 直装Directly 5#

16332



尺寸Dim.(mm): 29.06\*6.86\*3.89  
克重N.W.(g): 2.54  
适用范围Apply: 挂钩J-hook connector 3#

16333



尺寸Dim.(mm): 35.38\*8.59\*4.70  
克重N.W.(g): 4.00  
适用范围Apply: 挂钩J-hook connector 5#

16334



尺寸Dim.(mm): 34.91\*15.05\*2.09  
克重N.W.(g): 3.59  
扭力Torsion(N.m): 0.80  
适用范围Apply: 直装Directly 5#

16335



尺寸Dim.(mm): 28.23\*9.08\*2.20  
克重N.W.(g): 2.88  
扭力Torsion(N.m): 1.00  
适用范围Apply: 直装Directly 5#

16336



尺寸Dim.(mm): 32.01\*13.97\*3.31  
克重N.W.(g): 3.91  
适用范围Apply: 日字件Type connector 3# 5#



16337



尺寸Dim.(mm): 30.18\*13.07\*2.16  
克重N.W.(g): 2.10  
扭力Torsion(N.m): 0.55  
适用范围Apply: 直装Directly 8#

16338



尺寸Dim.(mm): 27.36\*8.26\*2.65  
克重N.W.(g): 2.29  
扭力Torsion(N.m): 0.7  
适用范围Apply: 直装Directly 5#

16339



尺寸Dim.(mm): 34.37\*10.10\*3.26  
克重N.W.(g): 3.98  
扭力Torsion(N.m): 0.65  
适用范围Apply: 直装Directly 8#

16340



尺寸Dim.(mm): 26.57\*13.02\*3.29  
克重N.W.(g): 2.58  
适用范围Apply: 挂钩J-hook connector 3# 5#

16341



尺寸Dim.(mm): 26.06\*11.88\*3.66  
克重N.W.(g): 2.35  
扭力Torsion(N.m): 0.85  
适用范围Apply: 直装Directly 5#

16342



尺寸Dim.(mm): 25.99\*11.81\*3.53  
克重N.W.(g): 2.18  
扭力Torsion(N.m): 0.93  
适用范围Apply: 直装Directly 5#

16343



尺寸Dim.(mm): 30.91\*14.17\*3.96  
克重N.W.(g): 3.72  
扭力Torsion(N.m): 1.35  
适用范围Apply: 直装Directly 8#

16344



尺寸Dim.(mm): 30.89\*14.15\*3.98  
克重N.W.(g): 3.76  
扭力Torsion(N.m): 1.5  
适用范围Apply: 直装Directly 8#

16345



尺寸Dim.(mm): 23.36\*8.39\*3.52  
克重N.W.(g): 1.82  
扭力Torsion(N.m): 0.55  
适用范围Apply: 直装Directly 3#

16346



尺寸Dim.(mm): 20.78 9.84\*2.94  
克重N.W.(g): 1.36  
适用范围Apply: 挂钩J-hook connector 3# 5#

16347



尺寸Dim.(mm): 26.95\*12.71\*3.87  
克重N.W.(g): 2.78  
适用范围Apply: 挂钩J-hook connector 3# 5#

16348



尺寸Dim.(mm): 29.16\*12.42\*1.94  
克重N.W.(g): 2.33  
扭力Torsion(N.m): 0.8  
适用范围Apply: 直装Directly 5#

16349



尺寸Dim.(mm): 32.12\*8.74\*3.89  
克重N.W.(g): 3.45  
适用范围Apply: 挂钩J-hook connector 3# 5#

16350



尺寸Dim.(mm): 31.88\*8.68\*4.09  
克重N.W.(g): 3.38  
适用范围Apply: 挂钩J-hook connector 3# 5#

16351



尺寸Dim.(mm): 24.55\*6.57\*3.15  
克重N.W.(g): 1.65  
适用范围Apply: 挂钩J-hook connector 3#

16352



尺寸Dim.(mm): 26.79\*9.66\*2.08  
克重N.W.(g): 2.27  
扭力Torsion(N.m): 0.6  
适用范围Apply: 直装Directly 5#



16353



尺寸Dim.(mm): 32.24\*11.54\*2.86  
克重N.W.(g): 3.67  
扭力Torsion(N.m): 0.5  
适用范围Apply: 直装Directly 5# 8#

16354



尺寸Dim.(mm): 31.08\*11.21\*2.54  
克重N.W.(g): 2.84  
扭力Torsion(N.m): 1.1  
适用范围Apply: 直装Directly 8#

16355



尺寸Dim.(mm): 21.98\*8.38\*2.03  
克重N.W.(g): 1.39  
适用范围Apply: 挂钩J-hook connector 3#

16356



尺寸Dim.(mm): 28.03\*10.27\*2.97  
克重N.W.(g): 2.45  
适用范围Apply: 挂钩J-hook connector 3# 5#

16357



尺寸Dim.(mm): 31.40\*15.16\*1.97  
克重N.W.(g): 4.29  
适用范围Apply: 挂钩J-hook connector 3# 5# 8#

16358



尺寸Dim.(mm): 26.27\*15.43\*2.16  
克重N.W.(g): 2.24  
扭力Torsion(N.m): 1.30  
适用范围Apply: 直装Directly 8#

16359



尺寸Dim.(mm): 31.41\*10.87\*2.58  
克重N.W.(g): 2.22  
扭力Torsion(N.m): 1.2  
适用范围Apply: 直装Directly 8#

16360



尺寸Dim.(mm): 23.98\*7.65\*2.44  
克重N.W.(g): 1.09  
扭力Torsion(N.m): 0.65  
适用范围Apply: 直装Directly 5#

16361



尺寸Dim.(mm): 21.69\*12.17\*2.45  
克重N.W.(g): 1.05  
扭力Torsion(N.m): 0.70  
适用范围Apply: 直装Directly 5#

16362



尺寸Dim.(mm): 24.87\*12.49\*1.81  
克重N.W.(g): 2.18  
适用范围Apply: 挂钩J-hook connector 3# 5#

16363



尺寸Dim.(mm): 23.45\*19.51\*2.03  
克重N.W.(g): 2.56  
适用范围Apply: 挂钩J-hook connector 3# 5#

16364



尺寸Dim.(mm): 37.12\*8.09\*2.36  
克重N.W.(g): 3.99  
适用范围Apply: 挂钩J-hook connector 3# 5#

16365



尺寸Dim.(mm): 46.07\*11.92\*6.00  
克重N.W.(g): 8.71  
扭力Torsion(N.m): 0.73  
适用范围Apply: 直装Directly 5#

16366



尺寸Dim.(mm): 31.87\*14.33\*4.30  
克重N.W.(g): 3.78  
扭力Torsion(N.m): 1.2  
适用范围Apply: 直装Directly 8#

16367



尺寸Dim.(mm): 38.43\*8.75\*4.06  
克重N.W.(g): 5.15  
适用范围Apply: 挂钩J-hook connector 3# 5#

16368



尺寸Dim.(mm): 21.06\*12.99\*1.90  
克重N.W.(g): 1.71  
扭力Torsion(N.m): 1.2  
适用范围Apply: 直装Directly 5#



16369



尺寸Dim.(mm): 30.56\*12.53\*4.79  
克重N.W.(g): 4.29  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16370



尺寸Dim.(mm): 46.78\*12.74\*2.68  
克重N.W.(g): 6.26  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16371



尺寸Dim.(mm): 34.15\*9.12\*4.06  
克重N.W.(g): 5.05  
扭力Torsion(N.m): 1.0  
适用范围Apply: 直装Directly 5#

16372



尺寸Dim.(mm): 40.02\*11.01\*2.70  
克重N.W.(g): 4.47  
扭力Torsion(N.m): 0.45  
适用范围Apply: 直装Directly 5#

16373



尺寸Dim.(mm): 25.78\*7.73\*2.11  
克重N.W.(g): 1.83  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16374



尺寸Dim.(mm): 27.48\*6.74\*2.11  
克重N.W.(g): 2.19  
适用范围Apply:  
日字件Type connector 3# 5#

16375



尺寸Dim.(mm): 20.50\*8.73\*2.64  
克重N.W.(g): 1.20  
扭力Torsion(N.m): 0.4  
适用范围Apply: 直装Directly 3#

16376



尺寸Dim.(mm): 27.90\*11.55\*5.31  
克重N.W.(g): 3.69  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16377



尺寸Dim.(mm): 25.09\*5.77\*2.36  
克重N.W.(g): 1.47  
适用范围Apply:  
日字件Type connector 3# 5#

16378



尺寸Dim.(mm): 25.32\*15.42\*2.27  
克重N.W.(g): 2.61  
扭力Torsion(N.m): 0.7  
适用范围Apply: 直装Directly 5#

16379



尺寸Dim.(mm): 27.30\*7.35\*3.16  
克重N.W.(g): 3.66  
适用范围Apply:  
日字件Type connector 3# 5#

16380




尺寸Dim.(mm): 25.56\*6.13\*2.27  
克重N.W.(g): 2.01  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16381



尺寸Dim.(mm): 29.52\*9.94\*2.96  
克重N.W.(g): 4.29  
扭力Torsion(N.m): 1.65  
适用范围Apply: 直装Directly 5#

16382

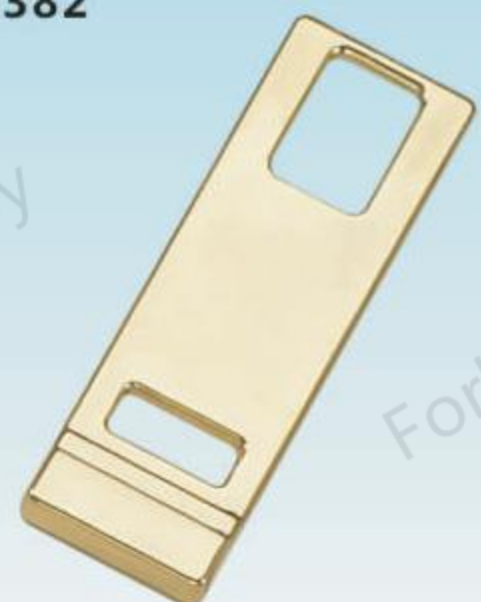

尺寸Dim.(mm): 36.54\*11.95\*3.12  
克重N.W.(g): 4.82  
扭力Torsion(N.m): 1.25  
适用范围Apply: 直装Directly 8#

16383



尺寸Dim.(mm): 26.41\*10.69\*1.94  
克重N.W.(g): 2.28  
扭力Torsion(N.m): 1.05  
适用范围Apply: 直装Directly 5#

16384



尺寸Dim.(mm): 30.08\*10.16\*2.42  
克重N.W.(g): 3.23  
扭力Torsion(N.m): 1.00  
适用范围Apply: 直装Directly 5#



16385



尺寸Dim.(mm): 30.10\*12.05\*2.37  
克重N.W.(g): 3.56  
扭力Torsion(N.m): 0.90  
适用范围Apply: 直装Directly 5#

16386



尺寸Dim.(mm): 30.07\*8.07\*2.40  
克重N.W.(g): 2.79  
扭力Torsion(N.m): 1.0  
适用范围Apply: 直装Directly 5#

16387



尺寸Dim.(mm): 26.93\*7.59\*1.66  
克重N.W.(g): 1.80  
适用范围Apply: 日字件Type connector 3# 5#

16388



尺寸Dim.(mm): 19.01\*6.41\*2.39  
克重N.W.(g): 0.97  
扭力Torsion(N.m): 0.55  
适用范围Apply: 直装Directly 3#

16389



尺寸Dim.(mm): 19.09\*9.29\*1.55  
克重N.W.(g): 0.81  
扭力Torsion(N.m): 0.37  
适用范围Apply: 直装Directly 3#

16390



尺寸Dim.(mm): 36.07\*21.98\*2.26  
克重N.W.(g): 5.07  
适用范围Apply: 挂钩J-hook connector 5# 8#

16391



尺寸Dim.(mm): 30.03\*13.91\*2.34  
克重N.W.(g): 3.03  
适用范围Apply: 挂钩J-hook connector 3# 5#

16392



尺寸Dim.(mm): 32.95\*13.66\*4.68  
克重N.W.(g): 5.16  
扭力Torsion(N.m): 1.85  
适用范围Apply: 直装Directly 8# 10#

16393



尺寸Dim.(mm): 37.59\*16.40\*2.72  
克重N.W.(g): 5.57  
扭力Torsion(N.m): 0.9  
适用范围Apply: 直装Directly 8# 10#

16394



尺寸Dim.(mm): 34.11\*11.80\*3.63  
克重N.W.(g): 3.75  
扭力Torsion(N.m): 0.88  
适用范围Apply: 直装Directly 8#

16395



尺寸Dim.(mm): 35.96\*14.62\*2.68  
克重N.W.(g): 4.88  
扭力Torsion(N.m): 1.45  
适用范围Apply: 直装Directly 8#

16396



尺寸Dim.(mm): 25.60\*11.58\*2.42  
克重N.W.(g): 2.97  
扭力Torsion(N.m): 1.15  
适用范围Apply: 直装Directly 5#

16397



尺寸Dim.(mm): 24.32\*10.88\*1.89  
克重N.W.(g): 1.25  
扭力Torsion(N.m): 0.6  
适用范围Apply: 直装Directly 5#

16398



尺寸Dim.(mm): 21.16\*12.22\*1.99  
克重N.W.(g): 1.94  
扭力Torsion(N.m): 1.0  
适用范围Apply: 直装Directly 5#

16399



尺寸Dim.(mm): 24.14\*15.19\*2.06  
克重N.W.(g): 2.33  
扭力Torsion(N.m): 1.0  
适用范围Apply: 直装Directly 5#

16400



尺寸Dim.(mm): 27.26\*7.59\*2.35  
克重N.W.(g): 2.22  
扭力Torsion(N.m): 0.72  
适用范围Apply: 直装Directly 5#



16401



尺寸Dim.(mm): 34.04\*13.59\*2.40  
克重N.W.(g): 3.01  
扭力Torsion(N.m): 1.05  
适用范围Apply: 直装Directly 8# 10#

16402



尺寸Dim.(mm): 30.58\*12.30\*2.16  
克重N.W.(g): 2.28  
扭力Torsion(N.m): 0.7  
适用范围Apply: 直装Directly 5#

16403



尺寸Dim.(mm): 25.02\*10.21\*1.86  
克重N.W.(g): 1.97  
扭力Torsion(N.m): 1.6  
适用范围Apply: 直装Directly 5#

16404



尺寸Dim.(mm): 30.04\*8.91\*1.97  
克重N.W.(g): 2.67  
扭力Torsion(N.m): 1.0  
适用范围Apply: 直装Directly 5#

16405



尺寸Dim.(mm): 22.22\*11.94\*2.87  
克重N.W.(g): 1.79  
扭力Torsion(N.m): 0.70  
适用范围Apply: 直装Directly 5#

16406



尺寸Dim.(mm): 26.76\*14.35\*3.35  
克重N.W.(g): 2.90  
扭力Torsion(N.m): 1.4  
适用范围Apply: 直装Directly 8#

16407



尺寸Dim.(mm): 31.46\*9.13\*2.91  
克重N.W.(g): 2.37  
适用范围Apply: 挂钩J-hook connector 3# 5#

16408



尺寸Dim.(mm): 30.70\*7.92\*1.81  
克重N.W.(g): 2.22  
适用范围Apply: 挂钩J-hook connector 3# 5#

16409



尺寸Dim.(mm): 26.10\*11.83\*3.65  
克重N.W.(g): 2.30  
扭力Torsion(N.m): 0.50  
适用范围Apply: 直装Directly 5#

16410



尺寸Dim.(mm): 16.94\*6.47\*2.45  
克重N.W.(g): 1.13  
扭力Torsion(N.m): 0.68  
适用范围Apply: 直装Directly 3#

16411



尺寸Dim.(mm): 34.60\*10.22\*2.29  
克重N.W.(g): 3.79  
扭力Torsion(N.m): 1.32  
适用范围Apply: 直装Directly 8#

16412



尺寸Dim.(mm): 16.45\*14.44\*3.85  
克重N.W.(g): 2.05  
适用范围Apply: 挂钩J-hook connector 3#

16413



尺寸Dim.(mm): 18.65\*6.22\*1.99  
克重N.W.(g): 0.54  
扭力Torsion(N.m): 0.26  
适用范围Apply: 直装Directly 3#

16414



尺寸Dim.(mm): 24.85\*7.57\*2.57  
克重N.W.(g): 1.10  
扭力Torsion(N.m): 0.5  
适用范围Apply: 直装Directly 5#

16415



尺寸Dim.(mm): 38.59\*11.71\*3.35  
克重N.W.(g): 4.08  
适用范围Apply: 挂钩J-hook connector 3# 5#

16416



尺寸Dim.(mm): 29.61\*7.56\*3.27  
克重N.W.(g): 3.21  
扭力Torsion(N.m): 0.3  
适用范围Apply: 直装Directly 3#



16417



尺寸Dim.(mm): 41.7\*13.0\*4.70  
克重N.W.(g): 3.64  
适用范围Apply:  
直装Directly 5#

16418



尺寸Dim.(mm): 15.12\*15.12\*1.33  
克重N.W.(g): 1.37  
适用范围Apply:  
挂钩J-hook connector 3#

16419



尺寸Dim.(mm): 36.54\*14.09\*5.15  
克重N.W.(g): 6.90  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16420



尺寸Dim.(mm): 28.47\*9.99\*3.31  
克重N.W.(g): 2.37  
扭力Torsion(N.m): 1.45  
适用范围Apply: 直装Directly 8#

16421



尺寸Dim.(mm): 23.90\*7.21\*2.10  
克重N.W.(g): 1.58  
扭力Torsion(N.m): 0.35  
适用范围Apply: 直装Directly 5#

16422



尺寸Dim.(mm): 27.00\*12.82\*3.15  
克重N.W.(g): 2.89  
扭力Torsion(N.m): 0.55  
适用范围Apply: 直装Directly 8#

16423



尺寸Dim.(mm): 30.73\*11.29\*2.11  
克重N.W.(g): 3.49  
扭力Torsion(N.m): 0.70  
适用范围Apply: 直装Directly 8#

16424



尺寸Dim.(mm): 37.60\*29.98\*3.00  
克重N.W.(g): 4.27  
适用范围Apply:  
直装Directly 5#

16425



尺寸Dim.(mm): 23.45\*8.44\*1.93  
克重N.W.(g): 1.44  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16426



尺寸Dim.(mm): 39.83\*9.04\*2.38  
克重N.W.(g): 4.28  
扭力Torsion(N.m): 1.4  
适用范围Apply: 直装Directly 8#

16427



尺寸Dim.(mm): 34.82\*7.81\*2.26  
克重N.W.(g): 3.05  
扭力Torsion(N.m): 0.71  
适用范围Apply: 直装Directly 5#

16428



尺寸Dim.(mm): 39.85\*9.09\*2.38  
克重N.W.(g): 4.30  
扭力Torsion(N.m): 1.35  
适用范围Apply: 直装Directly 8#

16429



尺寸Dim.(mm): 34.77\*7.87\*2.30  
克重N.W.(g): 3.06  
扭力Torsion(N.m): 0.75  
适用范围Apply: 直装Directly 5#

16430



尺寸Dim.(mm): 23.27\*8.23\*2.47  
克重N.W.(g): 2.01  
扭力Torsion(N.m): 0.95  
适用范围Apply: 直装Directly 5#

16431



尺寸Dim.(mm): 17.01\*9.81\*1.86  
克重N.W.(g): 0.90  
扭力Torsion(N.m): 0.45  
适用范围Apply: 直装Directly 3#

16432



尺寸Dim.(mm): 21.00\*11.96\*2.10  
克重N.W.(g): 1.74  
扭力Torsion(N.m): 0.8  
适用范围Apply: 直装Directly 5#



16433



尺寸Dim.(mm): 32.53\*16.16\*2.30  
克重N.W.(g): 4.39  
扭力Torsion(N.m): 1.33  
适用范围Apply: 直装Directly 8#

16434



尺寸Dim.(mm): 24.27\*12.85\*3.66  
克重N.W.(g): 2.96  
适用范围Apply:  
挂钩J-hook connector 3#

16435



尺寸Dim.(mm): 31.77\*7.63\*2.92  
克重N.W.(g): 3.43  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16436



尺寸Dim.(mm): 34.84\*14.95\*2.32  
克重N.W.(g): 4.25  
扭力Torsion(N.m): 1.00  
适用范围Apply: 直装Directly 5# 8#

16437



尺寸Dim.(mm): 24.84\*6.61\*3.55  
克重N.W.(g): 2.49  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16438



尺寸Dim.(mm): 35.38\*11.15\*3.78  
克重N.W.(g): 3.91  
扭力Torsion(N.m): 0.7  
适用范围Apply: 直装Directly 5#

16439



尺寸Dim.(mm): 22.00\*6.39\*3.26  
克重N.W.(g): 1.99  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16440



尺寸Dim.(mm): 28.30\*5.78\*3.74  
克重N.W.(g): 2.75  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16441



尺寸Dim.(mm): 27.32\*7.27\*3.38  
克重N.W.(g): 2.94  
适用范围Apply:  
日字件Type connector 3# 5#

16442



尺寸Dim.(mm): 24.18\*10.29\*3.60  
克重N.W.(g): 2.41  
扭力Torsion(N.m): 0.6  
适用范围Apply: 直装Directly 5#

16443



尺寸Dim.(mm): 29.79\*16.89\*2.41  
克重N.W.(g): 3.17  
扭力Torsion(N.m): 1.30  
适用范围Apply: 直装Directly 8#

16444



尺寸Dim.(mm): 28.85\*8.17\*3.06  
克重N.W.(g): 2.82  
扭力Torsion(N.m): 0.65  
适用范围Apply: 直装Directly 5#

16445



尺寸Dim.(mm): 28.40\*17.71\*1.90  
克重N.W.(g): 1.31  
扭力Torsion(N.m): 0.67  
适用范围Apply: 直装Directly 5#

16446



尺寸Dim.(mm): 30.48\*13.08\*2.55  
克重N.W.(g): 3.26  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16447



尺寸Dim.(mm): 26.61\*9.52\*3.04  
克重N.W.(g): 2.28  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16448



尺寸Dim.(mm): 27.64\*4.44\*4.07  
克重N.W.(g): 2.19  
适用范围Apply:  
挂钩J-hook connector 3#



16449



尺寸Dim.(mm): 26.77\*4.50\*4.65  
克重N.W.(g): 2.16  
扭力Torsion(N.m): 0.30  
适用范围Apply: 直装Directly 3#

16450



尺寸Dim.(mm): 34.71\*7.91\*2.33  
克重N.W.(g): 3.23  
扭力Torsion(N.m): 0.65  
适用范围Apply: 直装Directly 5#

16451



尺寸Dim.(mm): 39.85\*9.12\*2.41  
克重N.W.(g): 4.46  
扭力Torsion(N.m): 1.30  
适用范围Apply: 直装Directly 8#

16452



尺寸Dim.(mm): 24.85\*9.12\*2.21  
克重N.W.(g): 4.46  
适用范围Apply: 挂钩J-hook connector 3# 5#

16453



尺寸Dim.(mm): 28.84\*6.61\*3.85  
克重N.W.(g): 2.44  
适用范围Apply: 挂钩J-hook connector 3# 5#

16454



尺寸Dim.(mm): 29.77\*7.40\*2.64  
克重N.W.(g): 2.61  
适用范围Apply: 挂钩J-hook connector 3# 5#

16455



尺寸Dim.(mm): 29.59\*12.20\*2.04  
克重N.W.(g): 2.50  
扭力Torsion(N.m): 0.80  
适用范围Apply: 直装Directly 5#

16456



尺寸Dim.(mm): 26.19\*18.19\*3.26  
克重N.W.(g): 2.19  
扭力Torsion(N.m): 0.80  
适用范围Apply: 直装Directly 8#

16457



尺寸Dim.(mm): 21.92\*9.36\*1.90  
克重N.W.(g): 1.48  
扭力Torsion(N.m): 0.65  
适用范围Apply: 直装Directly 5#

16458



尺寸Dim.(mm): 23.64\*8.70\*1.54  
克重N.W.(g): 1.44  
扭力Torsion(N.m): 0.45  
适用范围Apply: 直装Directly 5#

16459



尺寸Dim.(mm): 38.67\*6.98\*3.08  
克重N.W.(g): 4.01  
适用范围Apply: 挂钩J-hook connector 3# 5#

16460



尺寸Dim.(mm): 29.52\*11.67\*2.86  
克重N.W.(g): 2.98  
扭力Torsion(N.m): 0.95  
适用范围Apply: 直装Directly 8#

16461



尺寸Dim.(mm): 40.56\*10.57\*5.14  
克重N.W.(g): 6.79  
扭力Torsion(N.m): 0.38  
适用范围Apply: 直装Directly 8#

16462



尺寸Dim.(mm): 45.41\*11.52\*5.15  
克重N.W.(g): 7.83  
扭力Torsion(N.m): 0.35  
适用范围Apply: 直装Directly 8#

16463



尺寸Dim.(mm): 30.20\*10.10\*2.82  
克重N.W.(g): 4.56  
适用范围Apply: 挂钩J-hook connector 3# 5#

16464



尺寸Dim.(mm): 20.05\*12.48\*1.70  
克重N.W.(g): 1.37  
扭力Torsion(N.m): 1.0  
适用范围Apply: 直装Directly 5#



16465



尺寸Dim.(mm): 20.13\*6.15\*2.23  
克重N.W.(g): 1.04  
扭力Torsion(N.m): 0.5  
适用范围Apply: 直装Directly 3#

16466



尺寸Dim.(mm): 12.11\*12.06\*1.66  
克重N.W.(g): 0.52  
适用范围Apply: 直装Directly 5#

16467



尺寸Dim.(mm): 13.07\*12.61\*2.21  
克重N.W.(g): 0.82  
适用范围Apply: 直装Directly 8#

16468



尺寸Dim.(mm): 29.86\*7.26\*2.64  
克重N.W.(g): 2.92  
适用范围Apply: 挂钩J-hook connector 3# 5#

16469



尺寸Dim.(mm): 28.68\*12.09\*3.24  
克重N.W.(g): 4.09  
扭力Torsion(N.m): 1.85  
适用范围Apply: 直装Directly 8#

16470



尺寸Dim.(mm): 30.94\*12.15\*2.79  
克重N.W.(g): 3.12  
扭力Torsion(N.m): 0.55  
适用范围Apply: 直装Directly 5#

16471



尺寸Dim.(mm): 30.24\*8.11\*2.35  
克重N.W.(g): 3.13  
适用范围Apply: 日字件Type connector 3# 5#

16472



尺寸Dim.(mm): 26.10\*13.71\*3.32  
克重N.W.(g): 2.14  
扭力Torsion(N.m): 0.85  
适用范围Apply: 直装Directly 8#

16473



尺寸Dim.(mm): 30.11\*15.01\*4.13  
克重N.W.(g): 3.58  
适用范围Apply: 挂钩J-hook connector 5# 8#

16474



尺寸Dim.(mm): 25.74\*10.91\*2.96  
克重N.W.(g): 3.13  
扭力Torsion(N.m): 1.20  
适用范围Apply: 直装Directly 5#

16475



尺寸Dim.(mm): 23.83\*17.68\*3.35  
克重N.W.(g): 4.22  
适用范围Apply: 挂钩J-hook connector 3# 5#

16476



尺寸Dim.(mm): 20.20\*14.99\*1.97  
克重N.W.(g): 1.25  
适用范围Apply: 日字件Type connector 3# 5#

16477



尺寸Dim.(mm): 25.12\*5.93\*4.25  
克重N.W.(g): 2.39  
适用范围Apply: 挂钩J-hook connector 3# 5#

16478



尺寸Dim.(mm): 23.21\*10.94\*1.75  
克重N.W.(g): 1.81  
扭力Torsion(N.m): 0.7  
适用范围Apply: 直装Directly 5#

16479



尺寸Dim.(mm): 31.56\*15.24\*2.07  
克重N.W.(g): 4.27  
扭力Torsion(N.m): 1.25  
适用范围Apply: 直装Directly 8#

16480



尺寸Dim.(mm): 29.78\*20.04\*1.89  
克重N.W.(g): 4.08  
扭力Torsion(N.m): 0.8  
适用范围Apply: 直装Directly 8#



16481



尺寸Dim.(mm): 37.45\*16.40\*2.79  
克重N.W.(g): 5.62  
扭力Torsion(N.m): 1.70  
适用范围Apply: 直装Directly 8#

16482



尺寸Dim.(mm): 27.32\*5.44\*3.26  
克重N.W.(g): 2.11  
适用范围Apply: 挂钩J-hook connector 3#

16483



尺寸Dim.(mm): 26.13\*6.57\*1.98  
克重N.W.(g): 1.81  
适用范围Apply: 挂钩J-hook connector 3#

16484



尺寸Dim.(mm): 32.12\*8.09\*2.29  
克重N.W.(g): 3.29  
适用范围Apply: 挂钩J-hook connector 5#

16485



尺寸Dim.(mm): 28.16\*7.05\*2.37  
克重N.W.(g): 2.37  
适用范围Apply: 挂钩J-hook connector 3#5#

16486



尺寸Dim.(mm): 35.10\*17.42\*4.73  
克重N.W.(g): 5.63  
扭力Torsion(N.m): 1.15  
适用范围Apply: 直装Directly 8#

16487



尺寸Dim.(mm): 22.39\*15.88\*2.36  
克重N.W.(g): 3.05  
适用范围Apply: 挂钩J-hook connector 3# 5#

16488



尺寸Dim.(mm): 19.28\*8.41\*2.73  
克重N.W.(g): 1.16  
扭力Torsion(N.m): 0.35  
适用范围Apply: 直装Directly 3#

16489



尺寸Dim.(mm): 24.36\*11.08\*3.54  
克重N.W.(g): 2.45  
扭力Torsion(N.m): 1.00  
适用范围Apply: 直装Directly 5#

16490



尺寸Dim.(mm): 33.26\*12.78\*3.75  
克重N.W.(g): 4.09  
扭力Torsion(N.m): 1.20  
适用范围Apply: 直装Directly 8#

16491



尺寸Dim.(mm): 34.49\*7.79\*2.36  
克重N.W.(g): 3.20  
扭力Torsion(N.m): 0.85  
适用范围Apply: 直装Directly 5#

16492



尺寸Dim.(mm): 41.87\*10.35\*3.12  
克重N.W.(g): 6.00  
适用范围Apply: 挂钩J-hook connector 5# 8#

16493



尺寸Dim.(mm): 26.97\*8.56\*2.05  
克重N.W.(g): 1.80  
扭力Torsion(N.m): 1.2  
适用范围Apply: 直装Directly 5#

16494



尺寸Dim.(mm): 31.87\*10.49\*2.11  
克重N.W.(g): 2.52  
扭力Torsion(N.m): 1.45  
适用范围Apply: 直装Directly 8#

16495



尺寸Dim.(mm): 20.96\*15.21\*3.21  
克重N.W.(g): 2.70  
适用范围Apply: 日字件Type connector 3# 5#

16496



尺寸Dim.(mm): 30.16\*8.43\*1.27  
克重N.W.(g): 1.90  
适用范围Apply: 圆圈Circle 5#



16497



尺寸Dim.(mm): 23.96\*6.00\*1.12  
克重N.W.(g): 0.96  
适用范围Apply:  
圆圈Circle 3#

16498



尺寸Dim.(mm): 16.88\*6.61\*1.51  
克重N.W.(g): 0.51  
扭力Torsion(N.m): 0.4  
适用范围Apply: 直装Directly 3#

16499



尺寸Dim.(mm): 26.94\*11.11\*2.78  
克重N.W.(g): 2.79  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16500



尺寸Dim.(mm): 18.96\*5.69\*2.30  
克重N.W.(g): 1.23  
扭力Torsion(N.m): 0.4  
适用范围Apply: 直装Directly 3#

16501



尺寸Dim.(mm): 36.62\*9.18\*4.14  
克重N.W.(g): 3.64  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16502



尺寸Dim.(mm): 26.58\*11.42\*1.94  
克重N.W.(g): 2.18  
扭力Torsion(N.m): 0.7  
适用范围Apply: 直装Directly 5#

16503



尺寸Dim.(mm): 29.57\*5.03\*2.93  
克重N.W.(g): 2.24  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16504



尺寸Dim.(mm): 30.64\*11.98\*2.20  
克重N.W.(g): 2.47  
扭力Torsion(N.m): 0.42  
适用范围Apply: 直装Directly 5#

16505



尺寸Dim.(mm): 28.19\*12.90\*3.22  
克重N.W.(g): 2.85  
扭力Torsion(N.m): 0.90  
适用范围Apply: 直装Directly 5#

16506



尺寸Dim.(mm): 35.57\*15.36\*3.65  
克重N.W.(g): 3.93  
扭力Torsion(N.m): 0.85  
适用范围Apply: 直装Directly 8#

16507



尺寸Dim.(mm): 34.93\*14.74\*3.51  
克重N.W.(g): 4.91  
扭力Torsion(N.m): 0.80  
适用范围Apply: 直装Directly 8#

16508



尺寸Dim.(mm): 30.01\*15.01\*4.09  
克重N.W.(g): 3.43  
扭力Torsion(N.m): 0.9  
适用范围Apply: 直装Directly 5#

16509



尺寸Dim.(mm): 36.05\*17.97\*4.88  
克重N.W.(g): 5.92  
扭力Torsion(N.m): 1.7  
适用范围Apply: 直装Directly 8#

16510



尺寸Dim.(mm): 23.06\*7.16\*2.86  
克重N.W.(g): 2.56  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16511



尺寸Dim.(mm): 19.65\*6.05\*2.44  
克重N.W.(g): 1.56  
适用范围Apply:  
挂钩J-hook connector 3#

16512



尺寸Dim.(mm): 34.05\*13.85\*2.51  
克重N.W.(g): 3.58  
扭力Torsion(N.m): 0.7  
适用范围Apply: 直装Directly 8#



16513



尺寸Dim.(mm): 30.42\*9.59\*3.62  
克重N.W.(g): 3.41  
适用范围Apply:  
挂钩J-hook connector 5#

16514



尺寸Dim.(mm): 24.42\*7.67\*2.94  
克重N.W.(g): 1.76  
适用范围Apply:  
挂钩J-hook connector 3#

16515



尺寸Dim.(mm): 34.60\*14.77\*2.30  
克重N.W.(g): 3.99  
扭力Torsion(N.m): 1.45  
适用范围Apply: 直装Directly 5#

16516



尺寸Dim.(mm): 25.59\*11.25\*1.92  
克重N.W.(g): 1.88  
扭力Torsion(N.m): 0.50  
适用范围Apply: 直装Directly 3#

16517



尺寸Dim.(mm): 22.30\*17.09\*2.08  
克重N.W.(g): 3.09  
适用范围Apply:  
日字件Type connector 3# 5#

16518



尺寸Dim.(mm): 24.90\*12.93\*2.21  
克重N.W.(g): 2.23  
扭力Torsion(N.m): 0.8  
适用范围Apply: 直装Directly 5#

16519



尺寸Dim.(mm): 18.06\*10.67\*4.67  
克重N.W.(g): 1.74  
扭力Torsion(N.m): 1.10  
适用范围Apply: 直装Directly 8#

16520



尺寸Dim.(mm): 35.88\*7.23\*3.43  
克重N.W.(g): 3.89  
扭力Torsion(N.m): 1.05  
适用范围Apply: 直装Directly 5#

16521



尺寸Dim.(mm): 25.63\*19.20\*2.09  
克重N.W.(g): 3.88  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16522



尺寸Dim.(mm): 29.61\*7.41\*3.48  
克重N.W.(g): 3.34  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16523



尺寸Dim.(mm): 33.80\*16.67\*2.25  
克重N.W.(g): 4.48  
扭力Torsion(N.m): 1.15  
适用范围Apply: 直装Directly 8#

16524



尺寸Dim.(mm): 30.86\*9.44\*3.13  
克重N.W.(g): 4.62  
扭力Torsion(N.m): 1.00  
适用范围Apply: 直装Directly 5#

16525



尺寸Dim.(mm): 29.50\*9.68\*3.84  
克重N.W.(g): 3.03  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16526



尺寸Dim.(mm): 20.57\*8.70\*2.56  
克重N.W.(g): 1.16  
扭力Torsion(N.m): 0.35  
适用范围Apply: 直装Directly 3#

16527



尺寸Dim.(mm): 24.24\*10.30\*3.21  
克重N.W.(g): 2.04  
扭力Torsion(N.m): 0.75  
适用范围Apply: 直装Directly 5#

16528



尺寸Dim.(mm): 39.41\*15.74\*3.05  
克重N.W.(g): 6.84  
扭力Torsion(N.m): 1.85  
适用范围Apply: 直装Directly 8#



16529



尺寸Dim.(mm): 32.54\*12.90\*2.77  
克重N.W.(g): 4.32  
扭力Torsion(N.m): 1.35  
适用范围Apply: 直装Directly 5#

16530



尺寸Dim.(mm): 33.00\*13.62\*4.54  
克重N.W.(g): 5.08  
扭力Torsion(N.m): 1.62  
适用范围Apply: 直装Directly 8#

16531



尺寸Dim.(mm): 36.23\*8.63\*2.28  
克重N.W.(g): 3.40  
适用范围Apply: 挂钩J-hook connector 3# 5#

16532



尺寸Dim.(mm): 37.45\*18.29\*3.60  
克重N.W.(g): 5.91  
扭力Torsion(N.m): 0.85  
适用范围Apply: 直装Directly 8#

16533



尺寸Dim.(mm): 30.09\*8.10\*2.39  
克重N.W.(g): 2.91  
扭力Torsion(N.m): 1.35  
适用范围Apply: 直装Directly 5#

16534



尺寸Dim.(mm): 34.93\*9.22\*2.64  
克重N.W.(g): 9.22  
扭力Torsion(N.m): 1.10  
适用范围Apply: 直装Directly 8#

16535



尺寸Dim.(mm): 24.78\*9.02\*2.91  
克重N.W.(g): 1.81  
扭力Torsion(N.m): 1.45  
适用范围Apply: 直装Directly 5#

16536



尺寸Dim.(mm): 35.97\*14.55\*2.65  
克重N.W.(g): 4.97  
扭力Torsion(N.m): 0.90  
适用范围Apply: 直装Directly 8#

16537



尺寸Dim.(mm): 28.70\*11.60\*2.44  
克重N.W.(g): 3.04  
扭力Torsion(N.m): 1.25  
适用范围Apply: 直装Directly 5#

16538



尺寸Dim.(mm): 33.80\*16.67\*3.14  
克重N.W.(g): 4.48  
扭力Torsion(N.m): 0.50  
适用范围Apply: 直装Directly 5#

16539



尺寸Dim.(mm): 30.86\*9.44\*1.75  
克重N.W.(g): 4.62  
扭力Torsion(N.m): 0.60  
适用范围Apply: 直装Directly 3#

16540



尺寸Dim.(mm): 29.50\*9.68\*4.16  
克重N.W.(g): 3.03  
扭力Torsion(N.m): 0.90  
适用范围Apply: 直装Directly 5#

16541



尺寸Dim.(mm): 35.53\*11.94\*4.59  
克重N.W.(g): 5.90  
适用范围Apply: 日字件Type connector 5# 8#

16542



尺寸Dim.(mm): 25.18\*7.35\*2.25  
克重N.W.(g): 2.11  
扭力Torsion(N.m): 0.68  
适用范围Apply: 直装Directly 3#

16543



尺寸Dim.(mm): 31.92\*15.44\*2.97  
克重N.W.(g): 3.43  
扭力Torsion(N.m): 0.63  
适用范围Apply: 直装Directly 5#

16544



尺寸Dim.(mm): 24.01\*9.64\*2.53  
克重N.W.(g): 1.10  
扭力Torsion(N.m): 0.40  
适用范围Apply: 直装Directly 5#

此图样只提供参考，部分图样是客户注册商标不得仿冒。

These drawing give reference only, part of the drawing is customer's trademarks, shall not be counterfeit.



16545



尺寸Dim.(mm): 28.28\*11.30\*2.93  
克重N.W.(g): 1.88  
扭力Torsion(N.m): 0.45  
适用范围Apply: 直装Directly 8#

16546



尺寸Dim.(mm): 24.41\*11.02\*1.94  
克重N.W.(g): 0.99  
适用范围Apply: 挂钩J-hook connector 3# 5#

16547



尺寸Dim.(mm): 24.85\*13.79\*2.20  
克重N.W.(g): 1.62  
适用范围Apply: 挂钩J-hook connector 5# 8#

16548



尺寸Dim.(mm): 22.17\*9.61\*3.86  
克重N.W.(g): 2.06  
适用范围Apply: 日字件Type connector 3# 5#

16549



尺寸Dim.(mm): 27.81\*12.28\*4.80  
克重N.W.(g): 3.95  
适用范围Apply: 日字件Type connector 5# 8#

16550



尺寸Dim.(mm): 30.41\*5.72\*3.86  
克重N.W.(g): 3.27  
扭力Torsion(N.m): 0.35  
适用范围Apply: 直装Directly 3#

16551



尺寸Dim.(mm): 29.42\*6.67\*3.97  
克重N.W.(g): 3.73  
扭力Torsion(N.m): 0.42  
适用范围Apply: 直装Directly 5#

16552



尺寸Dim.(mm): 30.09\*8.19\*2.30  
克重N.W.(g): 3.09  
扭力Torsion(N.m): 0.85  
适用范围Apply: 旋转头Rotating 5#

16553



尺寸Dim.(mm): 30.67\*13.69\*2.36  
克重N.W.(g): 3.10  
扭力Torsion(N.m): 0.9  
适用范围Apply: 直装Directly 5#

16554



尺寸Dim.(mm): 30.12\*8.66\*2.58  
克重N.W.(g): 2.74  
扭力Torsion(N.m): 0.63  
适用范围Apply: 直装Directly 5#

16555



尺寸Dim.(mm): 30.15\*9.34\*2.78  
克重N.W.(g): 3.55  
适用范围Apply: 旋转头Rotating 5#

16556



尺寸Dim.(mm): 36.41\*13.39\*4.93  
克重N.W.(g): 8.41  
扭力Torsion(N.m): 1.30  
适用范围Apply: 直装Directly 8#

16557



尺寸Dim.(mm): 28.61\*10.23\*2.93  
克重N.W.(g): 2.95  
扭力Torsion(N.m): 0.80  
适用范围Apply: 直装Directly 5#

16558



尺寸Dim.(mm): 32.80\*6.72\*1.87  
克重N.W.(g): 2.41  
适用范围Apply: 日字件Type connector 3# 5#

16559



尺寸Dim.(mm): 25.75\*8.85\*3.30  
克重N.W.(g): 3.01  
适用范围Apply: 挂钩J-hook connector 3# 5#

16560



尺寸Dim.(mm): 20.16\*10.97\*1.90  
克重N.W.(g): 1.26  
扭力Torsion(N.m): 0.60  
适用范围Apply: 直装Directly 8#



16561



尺寸Dim.(mm): 24.07\*8.34\*1.78  
克重N.W.(g): 1.77  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16562



尺寸Dim.(mm): 19.19\*13.87\*2.12  
克重N.W.(g): 2.09  
适用范围Apply:  
日字件Type connector 3# 5#

16563



尺寸Dim.(mm): 29.88\*12.07\*2.17  
克重N.W.(g): 3.52  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16564



尺寸Dim.(mm): 21.43\*9.57\*2.13  
克重N.W.(g): 1.59  
扭力Torsion(N.m): 0.55  
适用范围Apply: 直装Directly 5#

16565



尺寸Dim.(mm): 24.49\*7.75\*2.21  
克重N.W.(g): 1.01  
扭力Torsion(N.m): 0.63  
适用范围Apply: 直装Directly 5#

16566



尺寸Dim.(mm): 37.89\*27.76\*3.15  
克重N.W.(g): 3.96  
扭力Torsion(N.m): 1.6  
适用范围Apply: 直装Directly 8#

16567



尺寸Dim.(mm): 24.29\*11.55\*2.64  
克重N.W.(g): 2.01  
适用范围Apply:  
日字件Type connector 3# 5#

16568



尺寸Dim.(mm): 32.00\*12.61\*2.78  
克重N.W.(g): 4.05  
扭力Torsion(N.m): 1.80  
适用范围Apply: 直装Directly 5#

16569



尺寸Dim.(mm): 38.76\*15.20\*3.06  
克重N.W.(g): 6.33  
扭力Torsion(N.m): 1.80  
适用范围Apply: 直装Directly 8#

16570



尺寸Dim.(mm): 29.05\*24.06\*2.04  
克重N.W.(g): 4.29  
适用范围Apply:  
日字件Type connector 3# 5#

16571



尺寸Dim.(mm): 31.36\*10.98\*2.62  
克重N.W.(g): 2.82  
扭力Torsion(N.m): 0.85  
适用范围Apply: 直装Directly 8#

16572



尺寸Dim.(mm): 17.86\*8.18\*2.15  
克重N.W.(g): 1.10  
扭力Torsion(N.m): 0.80  
适用范围Apply: 直装Directly 3#

16573



尺寸Dim.(mm): 42.64\*34.32\*3.03  
克重N.W.(g): 4.90  
适用范围Apply:  
直装Directly 5#

16574



尺寸Dim.(mm): 30.66\*22.70\*2.36  
克重N.W.(g): 2.13  
适用范围Apply:  
日字件Type connector 3# 5#

16575



尺寸Dim.(mm): 52.66\*13.71\*2.14  
克重N.W.(g): 8.36

16576



尺寸Dim.(mm): 20.37\*8.74\*2.39  
克重N.W.(g): 1.53  
扭力Torsion(N.m): 0.74  
适用范围Apply: 直装Directly 3#



**16577**



尺寸Dim.(mm): 42.60\*34.78\*3.46  
克重N.W.(g): 6.20  
适用范围Apply:  
直装Directly 5#

**16578**



尺寸Dim.(mm): 22.07\*9.84\*1.66  
克重N.W.(g): 1.27  
扭力Torsion(N.m): 0.80  
适用范围Apply: 直装Directly 3#

**16579**



尺寸Dim.(mm): 27.00\*11.95\*2.04  
克重N.W.(g): 2.26  
扭力Torsion(N.m): 1.25  
适用范围Apply: 直装Directly 5#

**16580**



尺寸Dim.(mm): 32.24\*16.94\*1.53  
克重N.W.(g): 2.93  
扭力Torsion(N.m): 0.9  
适用范围Apply: 直装Directly 8#

**16581**



尺寸Dim.(mm): 27.78\*12.00\*2.14  
克重N.W.(g): 1.53  
适用范围Apply:  
挂钩J-hook connector 3# 5#

**16582**



尺寸Dim.(mm): 32.85\*16.75\*2.57  
克重N.W.(g): 4.31  
扭力Torsion(N.m): 1.00  
适用范围Apply: 直装Directly 5#

**16583**



尺寸Dim.(mm): 27.86\*14.07\*2.61  
克重N.W.(g): 3.25  
扭力Torsion(N.m): 1.10  
适用范围Apply: 直装Directly 8#

**16584**



尺寸Dim.(mm): 27.75\*14.00\*2.30  
克重N.W.(g): 3.07  
扭力Torsion(N.m): 1.00  
适用范围Apply: 直装Directly 5#

**16585**



尺寸Dim.(mm): 32.86\*16.69\*2.42  
克重N.W.(g): 4.29  
扭力Torsion(N.m): 1.10  
适用范围Apply: 直装Directly 8#

**16586**



尺寸Dim.(mm): 16.34\*7.28\*3.47  
克重N.W.(g): 1.37  
适用范围Apply:  
挂钩J-hook connector 3# 5#

**16587**



尺寸Dim.(mm): 28.18\*8.09\*4.20  
克重N.W.(g): 3.33  
适用范围Apply:  
挂钩J-hook connector 3# 5#

**16588**



尺寸Dim.(mm): 35.42\*10.14\*4.97  
克重N.W.(g): 6.25  
适用范围Apply:  
挂钩J-hook connector 5# 8#

**16589**



尺寸Dim.(mm): 36.01\*9.04\*4.05  
克重N.W.(g): 5.18  
扭力Torsion(N.m): 1.00  
适用范围Apply: 直装Directly 8#

**16590**



尺寸Dim.(mm): 29.00\*12.61\*6.35  
克重N.W.(g): 4.52  
扭力Torsion(N.m): 0.45  
适用范围Apply: 直装Directly 5#

**16591**



尺寸Dim.(mm): 29.75\*7.93\*3.50  
克重N.W.(g): 3.26  
扭力Torsion(N.m): 0.55  
适用范围Apply: 直装Directly 5#

**16592**



尺寸Dim.(mm): 24.84\*8.94\*2.32  
克重N.W.(g): 2.23  
扭力Torsion(N.m): 0.9  
适用范围Apply: 直装Directly 5#



16593



尺寸Dim.(mm): 29.70\*8.90\*2.32  
克重N.W.(g): 2.73  
扭力Torsion(N.m): 0.55  
适用范围Apply: 直装Directly 5#

16594



尺寸Dim.(mm): 32.70\*10.83\*2.12  
克重N.W.(g): 3.27  
扭力Torsion(N.m): 0.58  
适用范围Apply: 直装Directly 5#

16595



尺寸Dim.(mm): 34.02\*14.66\*1.93  
克重N.W.(g): 3.38  
扭力Torsion(N.m): 0.65  
适用范围Apply: 直装Directly 5#

16596



尺寸Dim.(mm): 23.45\*10.17\*2.49  
克重N.W.(g): 1.75  
扭力Torsion(N.m): 0.67  
适用范围Apply: 直装Directly 5#

16597



尺寸Dim.(mm): 24.87\*5.15\*3.21  
克重N.W.(g): 2.20  
适用范围Apply: 挂钩J-hook connector 3#

16598



尺寸Dim.(mm): 23.68\*9.93\*2.49  
克重N.W.(g): 1.63  
扭力Torsion(N.m): 0.65  
适用范围Apply: 直装Directly 5#

16599



尺寸Dim.(mm): 28.86\*19.84\*3.02  
克重N.W.(g): 4.46  
扭力Torsion(N.m): 0.68  
适用范围Apply: 直装Directly 5#

16600



尺寸Dim.(mm): 37.78\*27.96\*2.61  
克重N.W.(g): 5.29  
扭力Torsion(N.m): 0.80  
适用范围Apply: 直装Directly 5#

16601



尺寸Dim.(mm): 33.90\*12.35\*4.14  
克重N.W.(g): 5.63  
扭力Torsion(N.m): 0.60  
适用范围Apply: 直装Directly 8#

16602



尺寸Dim.(mm): 35.19\*7.30\*2.67  
克重N.W.(g): 3.27  
适用范围Apply: 挂钩J-hook connector 3# 5#

16603



尺寸Dim.(mm): 21.39\*7.97\*1.67  
克重N.W.(g): 1.05  
扭力Torsion(N.m): 0.70  
适用范围Apply: 直装Directly 3#

16604



尺寸Dim.(mm): 34.68\*11.95\*2.61  
克重N.W.(g): 3.95  
扭力Torsion(N.m): 0.4  
适用范围Apply: 直装Directly 5#

16605



尺寸Dim.(mm): 30.02\*11.57\*3.16  
克重N.W.(g): 3.31  
扭力Torsion(N.m): 0.9  
适用范围Apply: 直装Directly 5#

16606



尺寸Dim.(mm): 25.36\*12.40\*2.96  
克重N.W.(g): 2.57  
扭力Torsion(N.m): 1.05  
适用范围Apply: 直装Directly 5#

16607



尺寸Dim.(mm): 22.05\*12.07\*1.70  
克重N.W.(g): 1.00  
扭力Torsion(N.m): 0.75  
适用范围Apply: 直装Directly 5#

16608



尺寸Dim.(mm): 30.84\*9.68\*1.90  
克重N.W.(g): 2.44  
扭力Torsion(N.m): 1.50  
适用范围Apply: 直装Directly 5#



16609



尺寸Dim.(mm): 36.95\*11.30\*2.23  
克重N.W.(g): 4.14  
扭力Torsion(N.m): 1.80  
适用范围Apply: 直装Directly 8#

16610



尺寸Dim.(mm): 30.36\*14.87\*3.49  
克重N.W.(g): 4.26  
扭力Torsion(N.m): 1.90  
适用范围Apply: 直装Directly 8#

16611



尺寸Dim.(mm): 38.60\*14.68\*5.55  
克重N.W.(g): 8.66  
扭力Torsion(N.m): 1.7  
适用范围Apply: 直装Directly 8#

16612



尺寸Dim.(mm): 19.86\*5.25\*3.39  
克重N.W.(g): 1.60  
适用范围Apply: 挂钩J-hook connector 3# 5#

16613



尺寸Dim.(mm): 21.30\*16.73\*2.61  
克重N.W.(g): 2.62  
适用范围Apply: 挂钩J-hook connector 3# 5#

16614



尺寸Dim.(mm): 23.63\*13.29\*2.71  
克重N.W.(g): 1.89  
扭力Torsion(N.m): 1.00  
适用范围Apply: 直装Directly 5#

16615



尺寸Dim.(mm): 29.76\*16.60\*3.40  
克重N.W.(g): 3.64  
扭力Torsion(N.m): 0.60  
适用范围Apply: 直装Directly 8#

16616



尺寸Dim.(mm): 31.02\*11.29\*2.86  
克重N.W.(g): 2.99  
扭力Torsion(N.m): 1.60  
适用范围Apply: 直装Directly 5#

16617



尺寸Dim.(mm): 37.23\*13.59\*3.36  
克重N.W.(g): 5.08  
扭力Torsion(N.m): 1.30  
适用范围Apply: 直装Directly 8#

16618



尺寸Dim.(mm): 39.89\*13.07\*2.57  
克重N.W.(g): 4.29  
适用范围Apply: 挂钩J-hook connector 5# 8#

16619



尺寸Dim.(mm): 29.85\*10.02\*1.98  
克重N.W.(g): 1.38  
适用范围Apply: 挂钩J-hook connector 3# 5#

16620



尺寸Dim.(mm): 36.90\*10.50\*2.76  
克重N.W.(g): 3.91  
适用范围Apply: 挂钩J-hook connector 3# 5#

16621



尺寸Dim.(mm): 29.33\*23.83\*2.56  
克重N.W.(g): 2.57  
适用范围Apply: 日字件Type connector 3# 5#

16622



尺寸Dim.(mm): 26.45\*11.74\*2.86  
克重N.W.(g): 3.14  
扭力Torsion(N.m): 1.9  
适用范围Apply: 直装Directly 8#

16623



尺寸Dim.(mm): 31.07\*16.96\*2.03  
克重N.W.(g): 3.58  
扭力Torsion(N.m): 0.50  
适用范围Apply: 直装Directly 8#

16624



尺寸Dim.(mm): 16.49\*9.19\*1.58  
克重N.W.(g): 0.83  
扭力Torsion(N.m): 0.83  
适用范围Apply: 直装Directly 3#



16625



尺寸Dim.(mm): 19.61\*10.46\*1.71  
克重N.W.(g): 1.19  
扭力Torsion(N.m): 1.62  
适用范围Apply: 直装Directly 5#

16626



尺寸Dim.(mm): 23.76\*12.61\*2.11  
克重N.W.(g): 2.14  
扭力Torsion(N.m): 1.75  
适用范围Apply: 直装Directly 8#

16627



尺寸Dim.(mm): 27.73\*15.09\*2.23  
克重N.W.(g): 2.19  
扭力Torsion(N.m): 0.60  
适用范围Apply: 直装Directly 8#

16628



尺寸Dim.(mm): 26.47\*7.73\*2.99  
克重N.W.(g): 2.45  
扭力Torsion(N.m): 0.75  
适用范围Apply: 直装Directly 5#

16629



尺寸Dim.(mm): 38.15\*22.87\*2.70  
克重N.W.(g): 3.30  
扭力Torsion(N.m): 0.8  
适用范围Apply: 直装Directly 5#

16630



尺寸Dim.(mm): 36.54\*27.84\*3.12  
克重N.W.(g): 5.41  
扭力Torsion(N.m): 0.90  
适用范围Apply: 直装Directly 8#

16631



尺寸Dim.(mm): 33.73\*20.00\*3.20  
克重N.W.(g): 2.58  
扭力Torsion(N.m): 0.40  
适用范围Apply: 直装Directly 5#

16632



尺寸Dim.(mm): 33.78\*25.98\*3.97  
克重N.W.(g): 2.81  
扭力Torsion(N.m): 1.55  
适用范围Apply: 直装Directly 5#

16633



尺寸Dim.(mm): 30.30\*10.12\*3.13  
克重N.W.(g): 3.21  
扭力Torsion(N.m): 1.45  
适用范围Apply: 直装Directly 5#

16634



尺寸Dim.(mm): 21.84\*6.98\*2.19  
克重N.W.(g): 1.39  
适用范围Apply: 挂钩J-hook connector 3# 5#

16635



尺寸Dim.(mm): 26.90\*7.99\*2.91  
克重N.W.(g): 2.55  
扭力Torsion(N.m): 0.75  
适用范围Apply: 直装Directly 5#

16636



尺寸Dim.(mm): 20.58\*9.39\*2.71  
克重N.W.(g): 1.15  
扭力Torsion(N.m): 0.36  
适用范围Apply: 直装Directly 3#

16637



尺寸Dim.(mm): 32.52\*10.08\*10.05  
克重N.W.(g): 2.26  
扭力Torsion(N.m): 0.83  
适用范围Apply: 直装Directly 5# 8#

16638



尺寸Dim.(mm): 18.58\*7.63\*2.43  
克重N.W.(g): 0.83  
扭力Torsion(N.m): 0.38  
适用范围Apply: 直装Directly 3#

16639



尺寸Dim.(mm): 32.02\*16.91\*2.13  
克重N.W.(g): 3.74  
扭力Torsion(N.m): 1.0  
适用范围Apply: 直装Directly 8#

16640



尺寸Dim.(mm): 32.06\*17.10\*2.07  
克重N.W.(g): 4.20  
扭力Torsion(N.m): 0.45  
适用范围Apply: 直装Directly 8#



16641



尺寸Dim.(mm): 28.11\*11.07\*1.66  
克重N.W.(g): 1.92  
扭力Torsion(N.m): 0.46  
适用范围Apply: 直装Directly 5#

16642



尺寸Dim.(mm): 28.85\*11.40\*2.08  
克重N.W.(g): 2.44  
扭力Torsion(N.m): 0.52  
适用范围Apply: 直装Directly 5#

16643



尺寸Dim.(mm): 44.15\*15.73\*4.82  
克重N.W.(g): 5.40  
适用范围Apply: 挂钩J-hook connector 5# 8#

16644



尺寸Dim.(mm): 32.02\*10.07\*2.88  
克重N.W.(g): 1.92  
适用范围Apply: 挂钩J-hook connector 3# 5#

16645



尺寸Dim.(mm): 24.84\*9.01\*4.08  
克重N.W.(g): 2.28  
适用范围Apply: 挂钩J-hook connector 3# 5#

16646



尺寸Dim.(mm): 29.97\*8.00\*2.13  
克重N.W.(g): 2.43  
扭力Torsion(N.m): 1.50  
适用范围Apply: 直装Directly 5#

16647



尺寸Dim.(mm): 26.42\*15.84\*2.04  
克重N.W.(g): 2.80  
扭力Torsion(N.m): 1.50  
适用范围Apply: 直装Directly 8#

16648



尺寸Dim.(mm): 24.94\*11.99\*2.73  
克重N.W.(g): 2.86  
扭力Torsion(N.m): 1.90  
适用范围Apply: 直装Directly 5#

16649



尺寸Dim.(mm): 28.23\*13.50\*3.02  
克重N.W.(g): 3.89  
扭力Torsion(N.m): 1.80  
适用范围Apply: 直装Directly 8#

16650



尺寸Dim.(mm): 20.85\*9.83\*2.25  
克重N.W.(g): 1.52  
扭力Torsion(N.m): 0.65  
适用范围Apply: 直装Directly 3#

16651



尺寸Dim.(mm): 34.94\*14.13\*2.04  
克重N.W.(g): 3.61  
扭力Torsion(N.m): 0.60  
适用范围Apply: 直装Directly 5#

16652



尺寸Dim.(mm): 36.69\*15.30\*2.52  
克重N.W.(g): 3.63  
扭力Torsion(N.m): 0.45  
适用范围Apply: 直装Directly 8#

16653



尺寸Dim.(mm): 21.99\*6.88\*1.63  
克重N.W.(g): 1.12  
适用范围Apply: 挂钩J-hook connector 3# 5#

16654



尺寸Dim.(mm): 36.63\*30.07\*1.94  
克重N.W.(g): 3.32  
适用范围Apply: 挂钩J-hook connector 3# 5#

16655



尺寸Dim.(mm): 26.57\*20.04\*1.87  
克重N.W.(g): 2.13  
适用范围Apply: 挂钩J-hook connector 3# 5#

16656



尺寸Dim.(mm): 27.33\*8.01\*2.85  
克重N.W.(g): 1.89  
扭力Torsion(N.m): 0.24  
适用范围Apply: 直装Directly 5#



16657



尺寸Dim.(mm): 31.60\*7.96\*3.25  
克重N.W.(g): 1.86  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16658




尺寸Dim.(mm): 26.93\*10.75\*3.64  
克重N.W.(g): 2.46  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16659



尺寸Dim.(mm): 18.07\*7.52\*1.47  
克重N.W.(g): 0.58  
扭力Torsion(N.m): 0.33  
适用范围Apply: 直装Directly 3#

16660

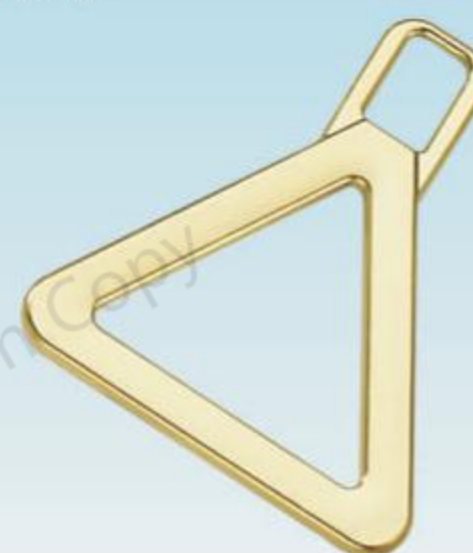

尺寸Dim.(mm): 32.81\*28.10\*2.20  
克重N.W.(g): 3.73  
扭力Torsion(N.m): 0.63  
适用范围Apply: 直装Directly 5#

16661



尺寸Dim.(mm): 19.22\*16.90\*2.18  
克重N.W.(g): 2.29  
适用范围Apply:  
挂钩J-hook connector 3# 5#

16662



尺寸Dim.(mm): 18.75\*16.87\*2.34  
克重N.W.(g): 2.74  
适用范围Apply:  
日字件Type connector 3# 5#

16663



尺寸Dim.(mm): 20.89\*16.10\*2.36  
克重N.W.(g): 2.13  
适用范围Apply:  
日字件Type connector 3# 5#

16664



尺寸Dim.(mm): 23.79\*19.86\*1.88  
克重N.W.(g): 1.20  
适用范围Apply:  
日字件Type connector 3# 5#

16665



尺寸Dim.(mm): 33.71\*29.69\*2.32  
克重N.W.(g): 2.60  
适用范围Apply:  
日字件Type connector 3# 5#

16666



尺寸Dim.(mm): 26.02\*8.49\*1.55  
克重N.W.(g): 1.64  
扭力Torsion(N.m): 0.60  
适用范围Apply: 旋转头Rotating 5#

16667



尺寸Dim.(mm): 29.41\*9.77\*2.07  
克重N.W.(g): 2.33  
扭力Torsion(N.m): 0.50  
适用范围Apply: 直装Directly 5#

16668



尺寸Dim.(mm): 21.26\*8.48\*3.08  
克重N.W.(g): 1.51  
扭力Torsion(N.m): 0.45  
适用范围Apply: 直装Directly 3#

16669



尺寸Dim.(mm): 19.46\*5.33\*2.74  
克重N.W.(g): 0.63  
适用范围Apply:  
挂钩J-hook connector 3#

16670



尺寸Dim.(mm): 40.44\*15.02\*2.11  
克重N.W.(g): 4.57  
扭力Torsion(N.m): 0.45  
适用范围Apply: 直装Directly 8#

16671



尺寸Dim.(mm): 34.94\*12.95\*1.88  
克重N.W.(g): 2.95  
扭力Torsion(N.m): 0.58  
适用范围Apply: 直装Directly 5#

16672



尺寸Dim.(mm): 24.68\*11.67\*2.58  
克重N.W.(g): 2.04  
适用范围Apply:  
日字件Type connector 3# 5#



16673



尺寸Dim.(mm): 35.36\*11.93\*3.66  
克重N.W.(g): 4.41  
扭力Torsion(N.m): 0.83  
适用范围Apply: 直装Directly 5#

16674



尺寸Dim.(mm): 45.33\*11.25\*9.30  
克重N.W.(g): 7.45  
扭力Torsion(N.m): 1.65  
适用范围Apply: 旋转头Rotating 5#

16675



尺寸Dim.(mm): 32.00\*10.08\*3.87  
克重N.W.(g): 5.23  
扭力Torsion(N.m): 1.25  
适用范围Apply: 旋转头Rotating 5#

16676



尺寸Dim.(mm): 29.14\*8.94\*2.74  
克重N.W.(g): 2.75  
扭力Torsion(N.m): 1.15  
适用范围Apply: 直装Directly 5#

16677



尺寸Dim.(mm): 56.80\*46.23\*3.50  
克重N.W.(g): 9.26  
扭力Torsion(N.m): 1.25  
适用范围Apply: 直装Directly 5# 8#

16678



尺寸Dim.(mm): 28.91\*9.99\*2.63  
克重N.W.(g): 3.04  
适用范围Apply: 直装Directly 5#

16679



尺寸Dim.(mm): 39.73\*11.28\*7.16  
克重N.W.(g): 6.00  
适用范围Apply: 连接件Fastnet connector 5#

16680



尺寸Dim.(mm): 14.01\*11.13\*1.65  
克重N.W.(g): 0.60  
适用范围Apply: 连接件Fastnet connector 5#

17001



尺寸Dim.(mm): 34.66\*34.56\*2.91  
克重N.W.(g): 14.67  
适用范围Apply: 挂钩直装  
J-hook connector Directly 5# 8#

17002



尺寸Dim.(mm): 30.84\*9.65\*3.84  
克重N.W.(g): 3.02  
适用范围Apply: 挂钩J-hook connector 3# 5#

17003



尺寸Dim.(mm): 27.09\*9.54\*2.29  
克重N.W.(g): 2.25  
扭力Torsion(N.m): 0.79  
适用范围Apply: 直装Directly 5#

17004



尺寸Dim.(mm): 22.53\*16.74\*2.17  
克重N.W.(g): 1.37  
适用范围Apply: 日字件Type connector 3# 5#

17005



尺寸Dim.(mm): 28.80\*9.89\*2.07  
克重N.W.(g): 2.90  
扭力Torsion(N.m): 0.88  
适用范围Apply: 直装Directly 5#

17006



尺寸Dim.(mm): 35.02\*12.24\*4.00  
克重N.W.(g): 4.26  
扭力Torsion(N.m): 0.9  
适用范围Apply: 直装Directly 5#

17007



尺寸Dim.(mm): 41.27\*14.28\*4.78  
克重N.W.(g): 7.02  
扭力Torsion(N.m): 1.04  
适用范围Apply: 直装Directly 8#

17008



尺寸Dim.(mm): 28.62\*14.30\*2.36  
克重N.W.(g): 3.43  
适用范围Apply: 挂钩J-hook connector 3# 5#



17009



尺寸Dim.(mm): 25.40\*8.56\*3.67  
克重N.W.(g): 1.89  
适用范围Apply:  
日字件Type connector 3# 5#

17010



尺寸Dim.(mm): 26.90\*9.64\*3.69  
克重N.W.(g): 2.42  
扭力Torsion(N.m): 0.84  
适用范围Apply: 直装Directly 5#

17011



尺寸Dim.(mm): 18.61\*6.65\*1.64  
克重N.W.(g): 0.89  
适用范围Apply:  
挂钩J-hook connector 3#

17012



尺寸Dim.(mm): 10.88\*8.25\*1.62  
克重N.W.(g): 0.39  
扭力Torsion(N.m): 0.65  
适用范围Apply:  
同17013配套直装Directly 5#

17013



尺寸Dim.(mm): 28.79\*8.14\*7.84  
克重N.W.(g): 3.31  
适用范围Apply:  
同17012配套直装Directly 5#

17014



尺寸Dim.(mm): 24.93\*3.51\*3.51  
克重N.W.(g): 3.25  
适用范围Apply:  
挂钩J-hook connector 3# 5#

17015



尺寸Dim.(mm): 31.11\*8.05\*2.57  
克重N.W.(g): 2.85  
扭力Torsion(N.m): 0.3  
适用范围Apply: 直装Directly 5#

17016



尺寸Dim.(mm): 29.92\*9.61\*2.04  
克重N.W.(g): 2.45  
扭力Torsion(N.m): 1.22  
适用范围Apply: 直装Directly 5#

17017



尺寸Dim.(mm): 21.91\*9.93\*1.89  
克重N.W.(g): 1.28  
扭力Torsion(N.m): 0.65  
适用范围Apply: 直装Directly 3#

17018



尺寸Dim.(mm): 31.90\*25.90\*2.97  
克重N.W.(g): 3.66  
适用范围Apply:  
日字件Type connector 3# 5#

17019



尺寸Dim.(mm): 28.74\*10.45\*2.92  
克重N.W.(g): 2.30  
扭力Torsion(N.m): 1.48  
适用范围Apply: 直装Directly 8#

17020



尺寸Dim.(mm): 33.40\*11.08\*2.80  
克重N.W.(g): 4.43  
扭力Torsion(N.m): 1.64  
适用范围Apply: 直装Directly 8#

17021



尺寸Dim.(mm): 26.92\*8.10\*3.04  
克重N.W.(g): 2.53  
扭力Torsion(N.m): 1.14  
适用范围Apply: 直装Directly 5#

17022



尺寸Dim.(mm): 25.6\*8.3\*2.0  
克重N.W.(g): 1.86  
扭力Torsion(N.m): 1.46  
适用范围Apply: 直装Directly 5#

17024



尺寸Dim.(mm): 32.2\*11.0\*2.0  
克重N.W.(g): 2.79  
扭力Torsion(N.m): 1  
适用范围Apply: 直装Directly 8#

17026



尺寸Dim.(mm): 28.02\*11.99\*2.08  
克重N.W.(g): 2.58  
扭力Torsion(N.m): 0.7  
适用范围Apply: 直装Directly 5#

此图样只提供参考，部分图样是客户注册商标不得仿冒。

These drawing give reference only, part of the drawing is customer's trademarks, shall not be counterfeit.



17027



尺寸Dim.(mm): 27.11\*9.40\*1.90  
克重N.W.(g): 2.20  
扭力Torsion(N.m): 0.96  
适用范围Apply: 直装Directly 5#

17028



尺寸Dim.(mm): 31.55\*10.88\*2.24  
克重N.W.(g): 3.39  
扭力Torsion(N.m): 1.72  
适用范围Apply: 直装Directly 8#

17029



尺寸Dim.(mm): 34.88\*14.93\*2.30  
克重N.W.(g): 4.43  
扭力Torsion(N.m): 1.07  
适用范围Apply: 直装Directly 8#

17030



尺寸Dim.(mm): 22.80\*7.60\*3.00  
克重N.W.(g): 1.66  
扭力Torsion(N.m): 0.56  
适用范围Apply: 直装Directly 3#

17031



尺寸Dim.(mm): 25.42\*8.05\*2.55  
克重N.W.(g): 1.21  
扭力Torsion(N.m): 0.6  
适用范围Apply: 直装Directly 5#

17032



尺寸Dim.(mm): 20.07\*8.05\*1.92  
克重N.W.(g): 1.10  
扭力Torsion(N.m): 0.65  
适用范围Apply: 直装Directly 3#

17033



尺寸Dim.(mm): 31.54\*12.50\*2.28  
克重N.W.(g): 2.99  
扭力Torsion(N.m): 0.68  
适用范围Apply: 直装Directly 8#

17034



尺寸Dim.(mm): 42.69\*8.16\*3.45  
克重N.W.(g): 3.75  
扭力Torsion(N.m): 0.81  
适用范围Apply: 直装Directly 5#

17035



尺寸Dim.(mm): 29.55\*5.81\*4.16  
克重N.W.(g): 2.70  
适用范围Apply:  
挂钩J-hook connector 3# 5#

17036



尺寸Dim.(mm): 14.27\*11.93\*1.87  
克重N.W.(g): 0.69  
适用范围Apply:  
挂钩J-hook connector 3# 5#

17037



尺寸Dim.(mm): 22.17\*14.82\*2.55  
克重N.W.(g): 2.54  
扭力Torsion(N.m): 0.85  
适用范围Apply:  
配3# 5#象鼻头With 3# 5# Non-lock

17038



尺寸Dim.(mm): 37.12\*13.92\*5.08  
克重N.W.(g): 3.97  
扭力Torsion(N.m): 1.05  
适用范围Apply: 配3#5#象鼻头With Non-lock  
挂钩J-hook connector 3# 5#

17039



尺寸Dim.(mm): 40.08\*11.38\*5.05  
克重N.W.(g): 6.17  
扭力Torsion(N.m): 1  
适用范围Apply: 配3#5#象鼻头With Non-lock  
挂钩J-hook connector 3#5#

17040



尺寸Dim.(mm): 25.06\*10.09\*2.57  
克重N.W.(g): 1.83  
扭力Torsion(N.m): 0.6  
适用范围Apply: 直装Directly 5#

17041



尺寸Dim.(mm): 24.10\*8.42\*1.95  
克重N.W.(g): 2.01  
扭力Torsion(N.m): 0.62  
适用范围Apply: 直装Directly 3#

17042



尺寸Dim.(mm): 23.0\*7.0\*2.0  
克重N.W.(g): 1.3  
扭力Torsion(N.m): 0.86  
适用范围Apply: 直装Directly 3#



17044



尺寸Dim.(mm): 25.4\*13.2\*2.0  
克重N.W.(g): 1.9  
扭力Torsion(N.m): 1.5  
适用范围Apply: 直装Directly 5#

17045



尺寸Dim.(mm): 32.0\*11.0\*2.0  
克重N.W.(g): 2.75  
扭力Torsion(N.m): 1.7  
适用范围Apply: 直装Directly 8#

17046



尺寸Dim.(mm): 46.65\*37.00\*3.30  
克重N.W.(g): 6.37  
适用范围Apply: 直装Directly 8#

17047



尺寸Dim.(mm): 25.94\*7.69\*2.23  
克重N.W.(g): 2.04  
扭力Torsion(N.m): 0.57  
适用范围Apply: 直装Directly 3#

17048



尺寸Dim.(mm): 21.91\*8.47\*2.45  
克重N.W.(g): 1.51  
扭力Torsion(N.m): 0.56  
适用范围Apply: 直装Directly 3#

17049



尺寸Dim.(mm): 25.85\*10.10\*2.96  
克重N.W.(g): 2.43  
扭力Torsion(N.m): 1.07  
适用范围Apply: 直装Directly 5#

17050



尺寸Dim.(mm): 30.13\*13.13\*3.00  
克重N.W.(g): 4.38  
扭力Torsion(N.m): 1.5  
适用范围Apply: 直装Directly 8#

17051



尺寸Dim.(mm): 25.85\*6.58\*4.42  
克重N.W.(g): 1.71  
适用范围Apply: 挂钩J-hook connector 3# 5#

17052



尺寸Dim.(mm): 36.06\*9.15\*3.09  
克重N.W.(g): 4.99  
适用范围Apply: 挂钩J-hook connector 5# 8#

17053



尺寸Dim.(mm): 25.43\*12.60\*2.64  
克重N.W.(g): 2.71  
扭力Torsion(N.m): 1.55  
适用范围Apply: 直装Directly 8#

17054



尺寸Dim.(mm): 30.01\*7.54\*3.88  
克重N.W.(g): 3.84  
扭力Torsion(N.m): 0.95  
适用范围Apply: 直装Directly 5#

17055



尺寸Dim.(mm): 22.82\*15.03\*2.87  
克重N.W.(g): 3.41  
扭力Torsion(N.m): 1.10  
适用范围Apply: 直装Directly 5#

17056



尺寸Dim.(mm): 20.94\*10.88\*2.38  
克重N.W.(g): 1.79  
扭力Torsion(N.m): 1.30  
适用范围Apply: 直装Directly 5#

17057



尺寸Dim.(mm): 19.71\*10.32\*2.08  
克重N.W.(g): 1.65  
扭力Torsion(N.m): 0.65  
适用范围Apply: 直装Directly 5# 旋转头Rotating

17058



尺寸Dim.(mm): 24.92\*20.43\*4.82  
克重N.W.(g): 5.43  
适用范围Apply: 挂钩J-hook connector 3# 5#

17059



尺寸Dim.(mm): 38.19\*15.08\*4.30  
克重N.W.(g): 7.48  
扭力Torsion(N.m): 0.90  
适用范围Apply: 直装Directly 8#



**17060**




尺寸Dim.(mm): 38.18\*28.31\*2.50  
克重N.W.(g): 3.62  
扭力Torsion(N.m): 1.15  
适用范围Apply: 直装Directly 8#

**17061**



尺寸Dim.(mm): 47.67\*34.75\*2.93  
克重N.W.(g): 8.03  
扭力Torsion(N.m): 1.20  
适用范围Apply: 直装Directly 8# 10#

**17062**

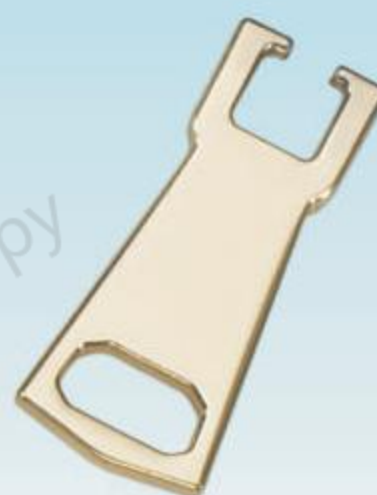

尺寸Dim.(mm): 29.44\*12.13\*2.06  
克重N.W.(g): 2.78  
扭力Torsion(N.m): 0.73  
适用范围Apply: 直装Directly 8# 旋转头Rotating

**17063**



尺寸Dim.(mm): 20.27\*20.27\*2.75  
克重N.W.(g): 4.48  
适用范围Apply: 挂钩J-hook connector 3# 5#

**17064**



尺寸Dim.(mm): 39.68\*20.30\*4.10  
克重N.W.(g): 10.71  
适用范围Apply: 挂钩J-hook connector 5# 8#

**17065**



尺寸Dim.(mm): 40.50\*9.53\*5.33  
克重N.W.(g): 5.85  
适用范围Apply: 挂钩J-hook connector 3# 5#

**17066**



尺寸Dim.(mm): 31.60\*7.95\*3.15  
克重N.W.(g): 2.37  
扭力Torsion(N.m): 0.30  
适用范围Apply: 直装Directly 3#

**17067**



尺寸Dim.(mm): 34.74\*9.20\*3.07  
克重N.W.(g): 2.81  
扭力Torsion(N.m): 0.36  
适用范围Apply: 直装Directly 5#

**17068**



尺寸Dim.(mm): 33.85\*10.05\*3.88  
克重N.W.(g): 4.62  
扭力Torsion(N.m): 0.55  
适用范围Apply: 直装Directly 5#

**17069**



尺寸Dim.(mm): 27.89\*12.27\*3.40  
克重N.W.(g): 3.57  
适用范围Apply: 日字件Type connector 3# 5#

**17070**



尺寸Dim.(mm): 26.24\*10.60\*3.25  
克重N.W.(g): 2.22  
扭力Torsion(N.m): 1.25  
适用范围Apply: 直装Directly 8#

**17071**



尺寸Dim.(mm): 26.19\*10.56\*3.24  
克重N.W.(g): 2.48  
扭力Torsion(N.m): 1.60  
适用范围Apply: 直装Directly 8#

**17072**



尺寸Dim.(mm): 25.18\*9.31\*3.07  
克重N.W.(g): 1.85  
扭力Torsion(N.m): 0.68  
适用范围Apply: 直装Directly 5#

**17073**



尺寸Dim.(mm): 23.99\*12.77\*2.60  
克重N.W.(g): 2.35  
扭力Torsion(N.m): 1.70  
适用范围Apply: 直装Directly 8#

**17074**



尺寸Dim.(mm): 19.82\*10.54\*2.22  
克重N.W.(g): 1.37  
扭力Torsion(N.m): 1.00  
适用范围Apply: 直装Directly 5#

**17075**



尺寸Dim.(mm): 29.86\*9.88\*2.12  
克重N.W.(g): 3.15  
扭力Torsion(N.m): 1.1  
适用范围Apply: 直装Directly 5#



17076



尺寸Dim.(mm): 29.67\*12.32\*3.10  
克重N.W.(g): 3.35  
扭力Torsion(N.m): 1.00  
适用范围Apply: 直装Directly 5#

17077



尺寸Dim.(mm): 37.64\*16.60\*3.98  
克重N.W.(g): 7.52  
扭力Torsion(N.m): 1.70  
适用范围Apply: 直装Directly 8#

17078



尺寸Dim.(mm): 29.63\*12.28\*1.97  
克重N.W.(g): 3.12  
扭力Torsion(N.m): 0.85  
适用范围Apply: 直装Directly 5#

17079



尺寸Dim.(mm): 37.57\*16.53\*2.68  
克重N.W.(g): 7.05  
扭力Torsion(N.m): 1.65  
适用范围Apply: 直装Directly 8#

17080



尺寸Dim.(mm): 60.40\*11.95\*4.45  
克重N.W.(g): 7.20  
适用范围Apply: 挂钩J-hook connector 5# 8#

17081



尺寸Dim.(mm): 33.83\*10.76\*2.13  
克重N.W.(g): 2.82  
扭力Torsion(N.m): 1.00  
适用范围Apply: 直装Directly 5#

17082



尺寸Dim.(mm): 36.00\*13.08\*2.19  
克重N.W.(g): 2.84  
适用范围Apply: 直装Directly 象鼻头Non-lock 5# 8#

17083



尺寸Dim.(mm): 29.14\*10.12\*2.01  
克重N.W.(g): 1.75  
扭力Torsion(N.m): 1.10  
适用范围Apply: 直装Directly 象鼻头Non-lock 5#

17084



尺寸Dim.(mm): 30.13\*7.12\*3.85  
克重N.W.(g): 2.57  
适用范围Apply: 挂钩J-hook connector 3#

17085



尺寸Dim.(mm): 25.5\*8.0\*2.0  
克重N.W.(g): 1.84  
扭力Torsion(N.m): 1.70  
适用范围Apply: 直装Directly 5#

17086



尺寸Dim.(mm): 31.05\*14.86\*3.50  
克重N.W.(g): 4.30  
扭力Torsion(N.m): 1.55  
适用范围Apply: 直装Directly 8#

17087



尺寸Dim.(mm): 35.13\*11.13\*2.12  
克重N.W.(g): 3.46  
扭力Torsion(N.m): 1.10  
适用范围Apply: 直装Directly 8#

17088



尺寸Dim.(mm): 30.00\*7.48\*3.92  
克重N.W.(g): 3.66  
扭力Torsion(N.m): 1.00  
适用范围Apply: 直装Directly 5#

17089



尺寸Dim.(mm): 20.35\*9.57\*1.65  
克重N.W.(g): 1.20  
扭力Torsion(N.m): 0.55  
适用范围Apply: 直装Directly 3#

17090



尺寸Dim.(mm): 23.18\*10.95\*1.68  
克重N.W.(g): 1.62  
扭力Torsion(N.m): 0.85  
适用范围Apply: 直装Directly 5#

17091



尺寸Dim.(mm): 29.80\*12.18\*5.62  
克重N.W.(g): 5.38  
扭力Torsion(N.m): 1.55  
适用范围Apply: 直装Directly 5#



17092



尺寸Dim.(mm): 29.76\*12.52\*5.38  
克重N.W.(g): 5.38  
扭力Torsion(N.m): 1.2  
适用范围Apply: 直装Directly 5#

17093



尺寸Dim.(mm): 34.04\*15.07\*6.25  
克重N.W.(g): 8.62  
扭力Torsion(N.m): 1.7  
适用范围Apply: 直装Directly 8#

17094



尺寸Dim.(mm): 35.78\*15.00\*3.14  
克重N.W.(g): 6.10  
扭力Torsion(N.m): 1.65  
适用范围Apply: 直装Directly 8#

17095



尺寸Dim.(mm): 27.81\*11.76\*2.39  
克重N.W.(g): 2.74  
扭力Torsion(N.m): 0.85  
适用范围Apply: 直装Directly 5#

17096



尺寸Dim.(mm): 27.69\*11.67\*2.59  
克重N.W.(g): 3.25  
扭力Torsion(N.m): 1.1  
适用范围Apply: 直装Directly 5#

17097



尺寸Dim.(mm): 31.88\*13.32\*2.80  
克重N.W.(g): 4.08  
扭力Torsion(N.m): 1.5  
适用范围Apply: 直装Directly 8#

17098



尺寸Dim.(mm): 31.63\*13.29\*2.76  
克重N.W.(g): 4.48  
扭力Torsion(N.m): 1.75  
适用范围Apply: 直装Directly 8#

17099



尺寸Dim.(mm): 44.22\*15.03\*2.18  
克重N.W.(g): 6.68  
扭力Torsion(N.m): 1.15  
适用范围Apply: 直装Directly 8#

17100



尺寸Dim.(mm): 41.09\*13.95\*2.10  
克重N.W.(g): 5.52  
扭力Torsion(N.m): 0.65  
适用范围Apply: 直装Directly 5#

17101



尺寸Dim.(mm): 28.41\*11.84\*3.70  
克重N.W.(g): 2.73  
扭力Torsion(N.m): 0.7  
适用范围Apply: 直装Directly 5#

17103



尺寸Dim.(mm): 30.40\*16.65\*2.42  
克重N.W.(g): 1.85  
扭力Torsion(N.m): 0.3  
适用范围Apply: 直装Directly 5#

17104



尺寸Dim.(mm): 32.00\*16.60\*2.35  
克重N.W.(g): 2.02  
扭力Torsion(N.m): 0.57  
适用范围Apply: 直装Directly 8#

17105



尺寸Dim.(mm): 32.19\*10.32\*2.69  
克重N.W.(g): 3.69  
扭力Torsion(N.m): 0.6  
适用范围Apply: 直装Directly 5#

17106



尺寸Dim.(mm): 28.60\*22.33\*4.07  
克重N.W.(g): 4.55  
扭力Torsion(N.m): 1.15  
适用范围Apply: 直装Directly 8#

17107



尺寸Dim.(mm): 20.99\*11.64\*2.41  
克重N.W.(g): 2.23  
扭力Torsion(N.m): 0.9  
适用范围Apply: 直装Directly 5#

17108



尺寸Dim.(mm): 32.81\*13.83\*2.38  
克重N.W.(g): 3.48  
扭力Torsion(N.m): 0.8  
适用范围Apply: 直装Directly 8#



17109



尺寸Dim.(mm): 30.03\*7.08\*3.97  
克重N.W.(g): 2.44  
适用范围Apply:  
挂钩J-hook connector 3#

17110



尺寸Dim.(mm): 38.76\*12.12\*4.20  
克重N.W.(g): 7.45  
扭力Torsion(N.m): 1.25  
适用范围Apply: 直装Directly 旋转头Rotating 5#

17111



尺寸Dim.(mm): 42.92\*14.56\*4.43  
克重N.W.(g): 10.66  
扭力Torsion(N.m): 0.9  
适用范围Apply: 直装Directly 旋转头Rotating 8#

17114



尺寸Dim.(mm): 53.63\*33.02\*3.02  
克重N.W.(g): 8.13  
适用范围Apply:  
挂钩J-hook connector 5#

17115



尺寸Dim.(mm): 25.43\*11.16\*3.15  
克重N.W.(g): 2.17  
扭力Torsion(N.m): 0.8  
适用范围Apply: 直装Directly 5#

17116



尺寸Dim.(mm): 44.98\*31.65 4.25  
克重N.W.(g): 3.56  
扭力Torsion(N.m):  
适用范围Apply: 直装Directly 5#

17117



尺寸Dim.(mm): 19.33\*9.48\*2.24  
克重N.W.(g): 1.61  
扭力Torsion(N.m): 0.9  
适用范围Apply: 直装Directly 3#

17118



尺寸Dim.(mm): 23.93\*5.34\*4.65  
克重N.W.(g): 1.25  
适用范围Apply:  
日字件Type connector 3# 5#

17119



尺寸Dim.(mm): 24.16\*10.08\*3.12  
克重N.W.(g): 1.59  
扭力Torsion(N.m): 0.55  
适用范围Apply: 直装Directly 5#

17120



尺寸Dim.(mm): 30.22\*13.17\*4.80  
克重N.W.(g): 3.82  
扭力Torsion(N.m): 1.2  
适用范围Apply: 直装Directly 8#

17121



尺寸Dim.(mm): 17.04\*8.97\*2.28  
克重N.W.(g): 0.72  
扭力Torsion(N.m): 0.65  
适用范围Apply: 直装Directly 3#

17122



尺寸Dim.(mm): 31.97\*12.07\*3.74  
克重N.W.(g): 3.23  
扭力Torsion(N.m): 1.35  
适用范围Apply: 直装Directly 8#

17123



尺寸Dim.(mm): 22.27\*11.06\*4.14  
克重N.W.(g): 2.80  
扭力Torsion(N.m): 0.37  
适用范围Apply: 直装Directly 5#

17124



尺寸Dim.(mm): 37.24\*12.55\*3.02  
克重N.W.(g): 4.25  
扭力Torsion(N.m): 0.45  
适用范围Apply: 直装Directly 8#

17125



尺寸Dim.(mm): 23.95\*13.61\*2.10  
克重N.W.(g): 1.82  
扭力Torsion(N.m): 0.95  
适用范围Apply: 直装Directly 5#

17126



尺寸Dim.(mm): 28.49\*16.10\*2.48  
克重N.W.(g): 2.97  
扭力Torsion(N.m): 1.7  
适用范围Apply: 直装Directly 8#



17127



尺寸Dim.(mm): 37.96\*8.17\*2.87  
克重N.W.(g): 3.25  
扭力Torsion(N.m): 0.28  
适用范围Apply: 直装Directly 5#

17128



尺寸Dim.(mm): 32.00\*6.97\*2.59  
克重N.W.(g): 2.18  
扭力Torsion(N.m): 0.22  
适用范围Apply: 直装Directly 3#

17129



尺寸Dim.(mm): 35.14\*10.13\*2.03  
克重N.W.(g): 3.45  
扭力Torsion(N.m): 0.8  
适用范围Apply: 直装Directly 8#

17130



尺寸Dim.(mm): 46.28\*14.68\*4.50  
克重N.W.(g): 10.05  
扭力Torsion(N.m): 0.78  
适用范围Apply: 直装Directly 8#

17131



尺寸Dim.(mm): 40.30\*12.21\*4.22  
克重N.W.(g): 7.24  
扭力Torsion(N.m): 1.4  
适用范围Apply: 直装Directly 5#

17132



尺寸Dim.(mm): 22.34\*12.06\*2.70  
克重N.W.(g): 1.64  
扭力Torsion(N.m): 1.2  
适用范围Apply: 直装Directly 5#

17133



尺寸Dim.(mm): 19.05\*9.39\*2.15  
克重N.W.(g): 0.96  
扭力Torsion(N.m): 1.0  
适用范围Apply: 直装Directly 3#

17134



尺寸Dim.(mm): 45.56\*29.76\*3.23  
克重N.W.(g): 6.23  
扭力Torsion(N.m): 1.15  
适用范围Apply: 直装Directly 8#

17135



尺寸Dim.(mm): 27.72\*12.31\*1.70  
克重N.W.(g): 2.16  
扭力Torsion(N.m): 0.75  
适用范围Apply: 直装Directly 5#

17136



尺寸Dim.(mm): 37.84\*12.50\*2.03  
克重N.W.(g): 3.29  
扭力Torsion(N.m): 1.35  
适用范围Apply: 直装Directly 8#

17137



尺寸Dim.(mm): 30.72\*11.63\*2.07  
克重N.W.(g): 3.78  
扭力Torsion(N.m): 1.55  
适用范围Apply: 直装Directly 5#

17138



尺寸Dim.(mm): 34.02\*10.55\*2.25  
克重N.W.(g): 3.66  
扭力Torsion(N.m): 1.35  
适用范围Apply: 直装Directly 5# 8#

17139



尺寸Dim.(mm): 28.06\*8.71\*1.98  
克重N.W.(g): 2.23  
扭力Torsion(N.m): 0.85  
适用范围Apply: 直装Directly 5#

17140



尺寸Dim.(mm): 33.64\*10.72\*2.26  
克重N.W.(g): 3.75  
扭力Torsion(N.m): 1.55  
适用范围Apply: 直装Directly 8#

17141



尺寸Dim.(mm): 31.90\*11.23\*2.78  
克重N.W.(g): 2.30  
扭力Torsion(N.m): 0.75  
适用范围Apply: 直装Directly 5#

17142



尺寸Dim.(mm): 17.15\*17.15\*2.73  
克重N.W.(g): 1.66  
适用范围Apply: 直装Directly 欧款European 3#



17144



尺寸Dim.(mm): 28.04\*9.65\*3.17  
克重N.W.(g): 2.68  
适用范围Apply:  
挂钩J-hook connector 3# 5#

17145



尺寸Dim.(mm): 29.40\*29.40\*1.75  
克重N.W.(g): 6.15  
适用范围Apply:  
直装Directly 5#

17146



尺寸Dim.(mm): 37.87\*30.02\*2.08  
克重N.W.(g): 8.23  
适用范围Apply:  
挂钩J-hook connector 5# 8#

18001



尺寸Dim.(mm): 34.84\*14.03\*1.91  
克重N.W.(g): 3.23  
扭力Torsion(N.m): 0.77  
适用范围Apply: 直装Directly 5#

18002



尺寸Dim.(mm): 28.80\*9.86\*1.94  
克重N.W.(g): 2.92  
扭力Torsion(N.m): 0.55  
适用范围Apply: 直装Directly 5# 旋转头Rotating

18003



尺寸Dim.(mm): 22.00\*10.00\*2.00  
克重N.W.(g): 1.26  
扭力Torsion(N.m): 0.65  
适用范围Apply: 直装Directly 3#

18004



尺寸Dim.(mm): 22.60\*13.70\*2.30  
克重N.W.(g): 1.92  
扭力Torsion(N.m): 1  
适用范围Apply: 直装Directly 5

18005



尺寸Dim.(mm): 37.69\*12.82\*4.61  
克重N.W.(g): 3.70  
扭力Torsion(N.m): 1.55  
适用范围Apply: 直装Directly 象鼻头Non-lock 5#

18006



尺寸Dim.(mm): 9.99\*5.50\*4.68  
克重N.W.(g): 0.43  
适用范围Apply:  
日字件Type connector 3# 5#

18007



尺寸Dim.(mm): 41.52\*14.14\*4.50  
克重N.W.(g): 4.46  
扭力Torsion(N.m): 2  
适用范围Apply: 直装Directly 象鼻头Non-lock 8#

18008



尺寸Dim.(mm): 18.07\*7.48\*3.65  
克重N.W.(g): 0.52  
扭力Torsion(N.m): 0.27  
适用范围Apply: 3# 尼龙弹簧拉片  
Nylon spring puller

18009



尺寸Dim.(mm): 23.43\*9.51\*4.90  
克重N.W.(g): 1.07  
扭力Torsion(N.m): 0.5  
适用范围Apply: 7# 尼龙弹簧拉片  
Nylon spring puller

18010



尺寸Dim.(mm): 46.10\*20.00\*2.55  
克重N.W.(g): 7.67  
扭力Torsion(N.m): 1.6  
适用范围Apply: 直装Directly 7# 8#

18011



尺寸Dim.(mm): 38.95\*29.78\*4.12  
克重N.W.(g): 4.13  
扭力Torsion(N.m): 0.8  
适用范围Apply: 直装Directly 3# 5#

18012



尺寸Dim.(mm): 18.67\*7.82\*2.66  
克重N.W.(g): 0.97  
扭力Torsion(N.m): 0.55  
适用范围Apply: 直装Directly 3#

18013



尺寸Dim.(mm): 20.00\*13.27\*1.21  
克重N.W.(g): 1.06  
适用范围Apply:  
挂钩J-hook connector 3# 5#



18014



尺寸Dim.(mm): 22.00\*12.59\*1.84  
克重N.W.(g): 2.10  
适用范围Apply:  
挂钩J-hook connector 3# 5#

18015



尺寸Dim.(mm): 40.35\*10.00\*4.01  
克重N.W.(g): 6.04  
扭力Torsion(N.m): 0.85  
适用范围Apply: 直装Directly 5#

18016



尺寸Dim.(mm): 25.49\*10.20\*2.23  
克重N.W.(g): 2.25  
扭力Torsion(N.m): 1.65  
适用范围Apply: 直装Directly 5#

18017



尺寸Dim.(mm): 20.58\*8.21\*1.75  
克重N.W.(g): 1.15  
扭力Torsion(N.m): 0.59  
适用范围Apply: 直装Directly 3#

18018



尺寸Dim.(mm): 32.07\*10.70\*1.63  
克重N.W.(g): 2.81  
扭力Torsion(N.m): 0.9  
适用范围Apply: 直装Directly 5#

18019



尺寸Dim.(mm): 38.00\*12.88\*1.90  
克重N.W.(g): 3.98  
扭力Torsion(N.m): 1.5  
适用范围Apply: 直装Directly 8#

18020



尺寸Dim.(mm): 28.97\*12.08\*2.65  
克重N.W.(g): 3.87  
扭力Torsion(N.m): 1.55  
适用范围Apply: 直装Directly 5#

18021



尺寸Dim.(mm): 26.12\*10.95\*2.42  
克重N.W.(g): 2.84  
扭力Torsion(N.m): 1.35  
适用范围Apply: 直装Directly 5#

18022



尺寸Dim.(mm): 24.99\*14.19\*2.53  
克重N.W.(g): 2.01  
扭力Torsion(N.m): 0.8  
适用范围Apply: 直装Directly 5# 8#

18023



尺寸Dim.(mm): 33.99\*10.45\*1.71  
克重N.W.(g): 2.71  
扭力Torsion(N.m): 1.3  
适用范围Apply: 直装Directly 8#

18024



尺寸Dim.(mm): 30.23\*9.02\*1.62  
克重N.W.(g): 2.03  
扭力Torsion(N.m): 0.85  
适用范围Apply: 直装Directly 5#

18025



尺寸Dim.(mm): 27.16\*5.69\*4.66  
克重N.W.(g): 1.80  
适用范围Apply:  
日字件Type connector 3# 5#

18026



尺寸Dim.(mm): 31.50\*11.40\*2.30  
克重N.W.(g): 2.86  
扭力Torsion(N.m): 0.6  
适用范围Apply: 直装Directly 5#

18027



尺寸Dim.(mm): 14.89\*5.15\*4.28  
克重N.W.(g): 0.94  
适用范围Apply:  
日字件Type connector 3# 5#

18028



尺寸Dim.(mm): 27.04\*11.95\*2.15  
克重N.W.(g): 2.02  
扭力Torsion(N.m): 0.66  
适用范围Apply: 直装Directly 5#

18029



尺寸Dim.(mm): 31\*20.00\*2.10  
克重N.W.(g): 2.72  
扭力Torsion(N.m): 0.6  
适用范围Apply: 直装Directly 5#



**18030**



尺寸Dim.(mm): 39.60\*14.00\*2.80  
克重N.W.(g): 6.85  
扭力Torsion(N.m): 1.7  
适用范围Apply: 直装Directly 8#

**18031**



尺寸Dim.(mm): 28.76\*8.10\*2.99  
克重N.W.(g): 2.62  
扭力Torsion(N.m): 0.9  
适用范围Apply: 直装Directly 5#

**18032**



尺寸Dim.(mm): 36.35\*21.61\*3.00  
克重N.W.(g): 3.56  
扭力Torsion(N.m): 0.9  
适用范围Apply: 直装Directly 5#

**18033**



尺寸Dim.(mm): 44\*10.00\*3.00  
克重N.W.(g): 5.78  
扭力Torsion(N.m): 0.6  
适用范围Apply: 直装Directly 5#

**18034**



尺寸Dim.(mm): 13.61\*13.61\*1.86  
克重N.W.(g): 0.65  
适用范围Apply:  
挂钩J-hook connector 3# 5# 8#

**18035**



尺寸Dim.(mm): 27.29\*9.60\*3.20  
克重N.W.(g): 2.38  
扭力Torsion(N.m): 0.88  
适用范围Apply: 直装Directly 5#

**18036**



尺寸Dim.(mm): 32.73\*10.12\*2.59  
克重N.W.(g): 4.06  
扭力Torsion(N.m): 0.55  
适用范围Apply: 直装Directly 5#

**18037**



尺寸Dim.(mm): 40.12\*12.77\*2.98  
克重N.W.(g): 6.64  
扭力Torsion(N.m): 0.85  
适用范围Apply: 直装Directly 8#

**18038**



尺寸Dim.(mm): 39.92\*25.44\*1.88  
克重N.W.(g): 3.42  
适用范围Apply:  
挂钩J-hook connector 3# 5# 8#

**18039**



尺寸Dim.(mm): 40.73\*30.18\*2.90  
克重N.W.(g): 4.32  
适用范围Apply:  
挂钩J-hook connector 3# 5#

**18040**



尺寸Dim.(mm): 31.65\*12.08\*2.79  
克重N.W.(g): 4.13  
扭力Torsion(N.m): 1.6  
适用范围Apply: 直装Directly 5#

**18041**



尺寸Dim.(mm): 31.88\*13.12\*5.28  
克重N.W.(g): 5.09  
扭力Torsion(N.m): 0.9  
适用范围Apply: 直装Directly 8#

**18042**



尺寸Dim.(mm): 21.93\*11.78\*2.46  
克重N.W.(g): 1.07  
扭力Torsion(N.m): 1.00  
适用范围Apply: 直装Directly 5#

**18043**



尺寸Dim.(mm): 25.79\*10.16\*2.00  
克重N.W.(g): 1.31  
扭力Torsion(N.m): 0.53  
适用范围Apply: 直装Directly 3#

**18044**



尺寸Dim.(mm): 18.00\*8.01\*1.73  
克重N.W.(g): 1.10  
扭力Torsion(N.m): 0.88  
适用范围Apply: 直装Directly 3#

**18045**



尺寸Dim.(mm): 37.28\*8.72\*3.96  
克重N.W.(g): 4.62  
适用范围Apply:  
挂钩J-hook connector 3# 5#



**18046**



尺寸Dim.(mm): 29.57\*8.39\*1.80  
克重N.W.(g): 2.28  
适用范围Apply:  
挂钩J-hook connector 3# 5#

**18047**



尺寸Dim.(mm): 21.82\*8.13\*1.60  
克重N.W.(g): 0.78  
扭力Torsion(N.m): 0.47  
适用范围Apply: 直装Directly 5#

**18048**



尺寸Dim.(mm): 48.56\*16.64\*2.01  
克重N.W.(g): 7.57  
扭力Torsion(N.m): 1.6  
适用范围Apply: 直装Directly 5#

**18049**



尺寸Dim.(mm): 42.20\*14.50\*1.82  
克重N.W.(g): 5.30  
扭力Torsion(N.m): 0.9  
适用范围Apply: 直装Directly 5#

**18050**



尺寸Dim.(mm): 35.08\*11.01\*2.00  
克重N.W.(g): 3.71  
扭力Torsion(N.m): 0.9  
适用范围Apply: 直装Directly 5#

**18051**



尺寸Dim.(mm): 31.80\*12.80\*3.00  
克重N.W.(g): 3.00  
扭力Torsion(N.m): 0.88  
适用范围Apply: 直装Directly 8#

**18052**



尺寸Dim.(mm): 22\*5.00\*3.00  
克重N.W.(g): 1.22  
适用范围Apply:  
日字件Type connector 3#

**18053**



尺寸Dim.(mm): 30.40\*9.00\*2.00  
克重N.W.(g): 2.38  
扭力Torsion(N.m): 0.9  
适用范围Apply: 直装Directly 5#

**18054**



尺寸Dim.(mm): 36.74\*17.65\*3.80  
克重N.W.(g): 4.72  
扭力Torsion(N.m): 1.7  
适用范围Apply: 直装Directly 8#

**18055**



尺寸Dim.(mm): 37.50\*16.40\*2.70  
克重N.W.(g): 5.66  
扭力Torsion(N.m): 1.5  
适用范围Apply: 直装Directly 5# 8#

**18056**



尺寸Dim.(mm): 33.15\*17.65\*2.70  
克重N.W.(g): 2.86  
扭力Torsion(N.m): 0.55  
适用范围Apply: 直装Directly 5#

**18057**



尺寸Dim.(mm): 28.71\*11.94\*2.10  
克重N.W.(g): 2.85  
扭力Torsion(N.m): 1.7  
适用范围Apply: 直装Directly 5#

**18058**



尺寸Dim.(mm): 25.00\*7.2\*1.70  
克重N.W.(g): 1.49  
扭力Torsion(N.m): 0.55  
适用范围Apply: 直装Directly 3#

**18059**



尺寸Dim.(mm): 37.40\*16.40\*2.80  
克重N.W.(g): 5.55  
扭力Torsion(N.m): 1.6  
适用范围Apply: 直装Directly 8#

**18060**



尺寸Dim.(mm): 37.90\*11.40\*2.70  
克重N.W.(g): 1.25  
扭力Torsion(N.m): 1.1  
适用范围Apply: 直装Directly 8#

**18061**



尺寸Dim.(mm): 40.00\*10.60\*2.20  
克重N.W.(g): 2.50  
适用范围Apply:  
挂钩J-hook connector 3# 5#



18062



尺寸Dim.(mm): 54.00\*12.10\*2.20  
克重N.W.(g): 4.30  
适用范围Apply:  
挂钩J-hook connector 5# 8#

18063



尺寸Dim.(mm): 28.60\*7.40\*3.10  
克重N.W.(g): 2.31  
扭力Torsion(N.m): 0.40  
适用范围Apply: 挂钩J-hook connector 5#

18064



尺寸Dim.(mm): 54.60\*18.00\*1.80  
克重N.W.(g): 9.38  
扭力Torsion(N.m): 1.5  
适用范围Apply: 直装Directly 8#

18065



尺寸Dim.(mm): 43.40\*14.40\*1.75  
克重N.W.(g): 5.75  
扭力Torsion(N.m): 1.27  
适用范围Apply: 直装Directly 5#

18066



尺寸Dim.(mm): 46.30\*20.60\*2.00  
克重N.W.(g): 6.33  
扭力Torsion(N.m): 1.20  
适用范围Apply: 直装Directly 8# 10#

18067



尺寸Dim.(mm): 37.70\*11.40\*2.80  
克重N.W.(g): 5.65  
扭力Torsion(N.m): 1.4  
适用范围Apply: 直装Directly 5# 8#

18068



尺寸Dim.(mm): 31.20\*9.10\*2.40  
克重N.W.(g): 3.16  
扭力Torsion(N.m): 0.9  
适用范围Apply: 直装Directly 5#

18069



尺寸Dim.(mm): 21.50\*7.20\*3.20  
克重N.W.(g): 1.17  
扭力Torsion(N.m): 0.4  
适用范围Apply: 直装Directly 3#

18070



尺寸Dim.(mm): 21.7\*18.00\*2.00  
克重N.W.(g): 1.46  
适用范围Apply:  
挂钩J-hook connector 3# 5#

18071



尺寸Dim.(mm): 54.50\*18.00\*2.10  
克重N.W.(g): 12.42  
扭力Torsion(N.m): 1.9  
适用范围Apply: 直装Directly 8# 10#

18072



尺寸Dim.(mm): 25.00\*10.00\*2.10  
克重N.W.(g): 2.77  
扭力Torsion(N.m): 1  
适用范围Apply: 直装Directly 5#

18073



尺寸Dim.(mm): 38.60\*13.00\*2.30  
克重N.W.(g): 5.13  
扭力Torsion(N.m): 1.53  
适用范围Apply: 直装Directly 5# 8#

18074



尺寸Dim.(mm): 37.50\*16.40\*2.70  
克重N.W.(g): 5.68  
扭力Torsion(N.m): 1.7  
适用范围Apply: 直装Directly 5# 8#

18075



尺寸Dim.(mm): 35.00\*35.00\*3.00  
克重N.W.(g): 4.92  
扭力Torsion(N.m): 1.35  
适用范围Apply: 直装Directly 8#

18076



尺寸Dim.(mm): 21.80\*10.50\*3.40  
克重N.W.(g): 1.49  
扭力Torsion(N.m): 0.6  
适用范围Apply: 直装Directly 3#

18077



尺寸Dim.(mm): 29.20\*24.00\*3.60  
克重N.W.(g): 5.33  
适用范围Apply:  
挂钩J-hook connector 5# 8#



18078



尺寸Dim.(mm): 24.00\*9.20\*3.00  
克重N.W.(g): 1.63  
扭力Torsion(N.m): 0.43  
适用范围Apply: 直装Directly 5#

18079



尺寸Dim.(mm): 25.60\*11.00\*3.00  
克重N.W.(g): 2.96  
扭力Torsion(N.m): 1.25  
适用范围Apply: 直装Directly 5#

18080



尺寸Dim.(mm): 29.60\*11.00\*2.70  
克重N.W.(g): 3.03  
扭力Torsion(N.m): 1.45  
适用范围Apply: 直装Directly 5#

18081



尺寸Dim.(mm): 29.20\*11.00\*3.60  
克重N.W.(g): 3.08  
扭力Torsion(N.m): 0.7  
适用范围Apply: 直装Directly 5#

18082



尺寸Dim.(mm): 30\*8.00\*2.30  
克重N.W.(g): 2.76  
扭力Torsion(N.m): 1.2  
适用范围Apply: 直装Directly 5#

18083



尺寸Dim.(mm): 27.2\*9.20\*1.50  
克重N.W.(g): 1.84  
扭力Torsion(N.m): 0.7  
适用范围Apply: 直装Directly 3#

18084



尺寸Dim.(mm): 42.00\*14.00\*1.80  
克重N.W.(g): 6.35  
扭力Torsion(N.m): 1.1  
适用范围Apply: 直装Directly 5#

18085



尺寸Dim.(mm): 35.00\*12.00\*2.30  
克重N.W.(g): 4.71  
扭力Torsion(N.m): 1.5  
适用范围Apply: 直装Directly 8# 10#

18086



尺寸Dim.(mm): 33.70 \*13.50\*4.50  
克重N.W.(g): 4.41  
扭力Torsion(N.m): 0.73  
适用范围Apply: 直装Directly 8#

18087



尺寸Dim.(mm): 34.5\*27.80\*2.00  
克重N.W.(g): 3.4  
扭力Torsion(N.m): 0.5  
适用范围Apply: 直装Directly 5# 8#

18088



尺寸Dim.(mm): 37.40\*16.30\*2.60  
克重N.W.(g): 5.31  
扭力Torsion(N.m): 1.4  
适用范围Apply: 直装Directly 5# 8#

18089



尺寸Dim.(mm): 32.10\*23.10\*2.10  
克重N.W.(g): 2.74  
扭力Torsion(N.m): 0.8  
适用范围Apply: 直装Directly 5#

18090



尺寸Dim.(mm): 35\*17.60\*4.10  
克重N.W.(g): 3.95  
扭力Torsion(N.m): 1.25  
适用范围Apply: 直装Directly 5# 8#

18091



尺寸Dim.(mm): 35.5\*25.60\*2.50  
克重N.W.(g): 2.78  
扭力Torsion(N.m): 0.7  
适用范围Apply: 直装Directly 5# 8#

18092



尺寸Dim.(mm): 28.8\*12.20\*3.20  
克重N.W.(g): 3.98  
扭力Torsion(N.m): 1.4  
适用范围Apply: 直装Directly 5# 8#

18093



尺寸Dim.(mm): 32.40\*12.00\*3.00  
克重N.W.(g): 4.03  
扭力Torsion(N.m): 1.4  
适用范围Apply: 直装Directly 5# 8#



18094



尺寸Dim.(mm): 26.00\*9.80\*1.70  
克重N.W.(g): 1.98  
扭力Torsion(N.m): 0.85  
适用范围Apply: 直装Directly 5#

18095



尺寸Dim.(mm): 20.30\*15.00\*2.10  
克重N.W.(g): 2.12  
适用范围Apply: 挂钩J-hook connector 3# 5#

18096



尺寸Dim.(mm): 36.2\*11.50\*3.10  
克重N.W.(g): 3.33  
扭力Torsion(N.m): 1  
适用范围Apply: 直装Directly 5# 8#

18097



尺寸Dim.(mm): 32.4\*14.80\*3.00  
克重N.W.(g): 3.08  
扭力Torsion(N.m): 1.1  
适用范围Apply: 直装Directly 5# 8#

18098



尺寸Dim.(mm): 30\*8.00\*2.20  
克重N.W.(g): 2.91  
适用范围Apply: 日字件Type connector 3# 5#

18099



尺寸Dim.(mm): 24\*9.00\*2.20  
克重N.W.(g): 1.69  
扭力Torsion(N.m): 0.85  
适用范围Apply: 直装Directly 5#

18100



尺寸Dim.(mm): 43\*12.20\*11.00  
克重N.W.(g): 8.84  
扭力Torsion(N.m): 0.38  
适用范围Apply: 直装Directly 8#

18101



尺寸Dim.(mm): 20.35\*10.50\*1.60  
克重N.W.(g): 1.23  
扭力Torsion(N.m): 0.55  
适用范围Apply: 直装Directly 3#

18102



尺寸Dim.(mm): 25\*11.00\*3.20  
克重N.W.(g): 2.58  
扭力Torsion(N.m): 1.25  
适用范围Apply: 直装Directly 5#

18103



尺寸Dim.(mm): 41\*16.00\*2.00  
克重N.W.(g): 7.22  
扭力Torsion(N.m): 1.53  
适用范围Apply: 直装Directly 5# 8#

18104



尺寸Dim.(mm): 38\*19.20\*3.00  
克重N.W.(g): 3.87  
适用范围Apply: 挂钩J-hook connector 3# 5#

18105



尺寸Dim.(mm): 25.4\*25.40\*2.00  
克重N.W.(g): 6.04  
适用范围Apply: 挂钩J-hook connector 5# 8#

18106



尺寸Dim.(mm): 30.3\*3.0\*3.0  
克重N.W.(g): 1.51  
适用范围Apply: 日字件Type connector 3# 4# 5#

18107



尺寸Dim.(mm): 41.5\*19.00\*2.20  
克重N.W.(g): 5.81  
扭力Torsion(N.m): 1.7  
适用范围Apply: 直装Directly 8#

18108



尺寸Dim.(mm): 43.5\*33.60\*3.00  
克重N.W.(g): 4.82  
适用范围Apply: 直装Directly 8#

18109



尺寸Dim.(mm): 26.00\*15.00\*2.0  
克重N.W.(g): 2.44  
扭力Torsion(N.m): 1.15  
适用范围Apply: 直装Directly 5#



18110



尺寸Dim.(mm): 30.00\*12.00\*2.70  
克重N.W.(g): 2.78  
扭力Torsion(N.m): 1.0  
适用范围Apply: 直装Directly 5#

18112



尺寸Dim.(mm): 40.40\*12.10\*3.00  
克重N.W.(g): 5.03  
扭力Torsion(N.m): 1.35  
适用范围Apply: 直装Directly 8#

18113



尺寸Dim.(mm): 22.10\*17.00\*2.10  
克重N.W.(g): 3.97  
适用范围Apply: 日字件Type connector 5#

18114



尺寸Dim.(mm): 25.00\*10.00\*1.85  
克重N.W.(g): 1.70  
扭力Torsion(N.m): 0.6  
适用范围Apply: 直装Directly 3#

18115



尺寸Dim.(mm): 22.40\*14.00\*2.25  
克重N.W.(g): 2.41  
扭力Torsion(N.m): 0.95  
适用范围Apply: 直装Directly 3# 5#

18116



尺寸Dim.(mm): 36.50\*11.00\*2.45  
克重N.W.(g): 3.71  
扭力Torsion(N.m): 0.6  
适用范围Apply: 直装Directly 5#

18117



尺寸Dim.(mm): 26.00\*11.00\*4.20  
克重N.W.(g): 2.25  
扭力Torsion(N.m): 0.75  
适用范围Apply: 直装Directly 5#

18118



尺寸Dim.(mm): 32.00\*8.50\*2.00  
克重N.W.(g): 1.91  
扭力Torsion(N.m): 0.55  
适用范围Apply: 直装Directly 5#

18119



尺寸Dim.(mm): 50.00\*23.00\*3.70  
克重N.W.(g): 8.99  
扭力Torsion(N.m): 0.8  
适用范围Apply: 直装Directly 8#

18121



尺寸Dim.(mm): 35.60\*15.00\*2.20  
克重N.W.(g): 4.34  
适用范围Apply: 挂钩J-hook connector 5#

18122



尺寸Dim.(mm): 30\*13.00\*2.35  
克重N.W.(g): 3.43  
扭力Torsion(N.m): 1  
适用范围Apply: 直装Directly 8# 10#

18123



尺寸Dim.(mm): 35.00\*14.00\*2.00  
克重N.W.(g): 3.23  
扭力Torsion(N.m): 0.6  
适用范围Apply: 直装Directly 5#

18124



尺寸Dim.(mm): 30.00\*13.00\*4.00  
克重N.W.(g): 4.14  
扭力Torsion(N.m): 0.4  
适用范围Apply: 直装Directly 5#

18125



尺寸Dim.(mm): 40.20\*14.10\*3.00  
克重N.W.(g): 6.30  
扭力Torsion(N.m): 0.9  
适用范围Apply: 直装Directly 5#

18126



尺寸Dim.(mm): 37.50\*16.40\*2.60  
克重N.W.(g): 5.01  
扭力Torsion(N.m): 1.65  
适用范围Apply: 直装Directly 8#

18127



尺寸Dim.(mm): 41.00\*13.00\*2.15  
克重N.W.(g): 6.55  
扭力Torsion(N.m): 1.2  
适用范围Apply: 直装Directly 5# 8#



18128



尺寸Dim.(mm): 41.00\*13.00\*2.20  
克重N.W.(g): 6.57  
扭力Torsion(N.m): 1.05  
适用范围Apply: 直装Directly 5# 8#

18129



尺寸Dim.(mm): 42.00\*14.30\*8.00  
克重N.W.(g): 3.91  
适用范围Apply: 直装Directly 5#8# 象鼻头Non-lock

18130



尺寸Dim.(mm): 22.00\*7.00\*2.50  
克重N.W.(g): 1.47  
扭力Torsion(N.m): 0.75  
适用范围Apply: 直装Directly 5#

18131



尺寸Dim.(mm): 39.00\*12.50\*2.70  
克重N.W.(g): 6.80  
扭力Torsion(N.m): 2.1  
适用范围Apply: 直装Directly 8# 10#

18132



尺寸Dim.(mm): 45.00\*14.35\*3.20  
克重N.W.(g): 10.24  
扭力Torsion(N.m): 2.2  
适用范围Apply: 直装Directly 10# 12# 15#

18133



尺寸Dim.(mm): 39.00\*16.00\*3.00  
克重N.W.(g): 5.60  
扭力Torsion(N.m): 0.8  
适用范围Apply: 直装Directly 8#

18134



尺寸Dim.(mm): 20.60\*6.40\*2.60  
克重N.W.(g): 0.78  
扭力Torsion(N.m): 0.45  
适用范围Apply: 直装Directly 3#

18135



尺寸Dim.(mm): 18.35\*7.50\*2.50  
克重N.W.(g): 0.84  
扭力Torsion(N.m): 0.7  
适用范围Apply: 直装Directly 3#

18136



尺寸Dim.(mm): 20.00\*7.25\*3.20  
克重N.W.(g): 0.81  
扭力Torsion(N.m): 0.65  
适用范围Apply: 直装Directly 3#

18137



尺寸Dim.(mm): 17.20\*17.00\*2.00  
克重N.W.(g): 1.91  
适用范围Apply: 挂钩J-hook connector 3#

18138



尺寸Dim.(mm): 21.20\*6.60\*2.30  
克重N.W.(g): 1.48  
适用范围Apply: 挂钩J-hook connector 3#

18139



尺寸Dim.(mm): 26.60\*8.20\*2.70  
克重N.W.(g): 2.71  
适用范围Apply: 挂钩J-hook connector 5#

18140



尺寸Dim.(mm): 38.00\*12.00\*3.20  
克重N.W.(g): 6.74  
扭力Torsion(N.m): 1.7  
适用范围Apply: 直装Directly 8#

18141



尺寸Dim.(mm): 22.40\*23.70\*2.52  
克重N.W.(g): 2.49  
适用范围Apply: 挂钩J-hook connector 3# 5#

18142



尺寸Dim.(mm): 32.00\*13.00\*4.00  
克重N.W.(g): 3.90  
扭力Torsion(N.m): 0.6  
适用范围Apply: 直装Directly 3# 5#

18143



尺寸Dim.(mm): 40.00\*17.00\*4.00  
克重N.W.(g): 6.27  
扭力Torsion(N.m): 0.7  
适用范围Apply: 直装Directly 8# 10#



18144



尺寸Dim.(mm): 23.85\*4.40\*2.40  
克重N.W.(g): 1.20  
适用范围Apply:  
日字件Type connector 3#

18145



尺寸Dim.(mm): 35\*17.80\*4.20  
克重N.W.(g): 4.03  
扭力Torsion(N.m): 1  
适用范围Apply: 直装Directly 8#

18147



尺寸Dim.(mm): 26\*10.00\*1.80  
克重N.W.(g): 1.45  
扭力Torsion(N.m): 0.8  
适用范围Apply: 直装Directly 5#

18148



尺寸Dim.(mm): 18.35\*7.50\*2.50  
克重N.W.(g): 0.84  
扭力Torsion(N.m): 0.7  
适用范围Apply: 直装Directly 3#

18149



尺寸Dim.(mm): 28.9\*10.00\*1.85  
克重N.W.(g): 2.11  
扭力Torsion(N.m): 1.1  
适用范围Apply: 直装Directly 5#

18150



尺寸Dim.(mm): 55.6\*50.50\*3.00  
克重N.W.(g): 6.23  
适用范围Apply:  
挂钩J-hook connector 5# 8#

18151



尺寸Dim.(mm): 33\*24.30\*2.00  
克重N.W.(g): 1.78  
适用范围Apply:  
直装Directly 5#

18152



尺寸Dim.(mm): 38\*28.00\*2.33  
克重N.W.(g): 2.95  
适用范围Apply:  
直装Directly 8#

19001



尺寸Dim.(mm): 22.90\*12.30\*1.85  
克重N.W.(g): 1.44  
适用范围Apply:  
挂钩J-hook connector 3# 5#

19002



尺寸Dim.(mm): 25.00\*11.00\*2.00  
克重N.W.(g): 1.95  
适用范围Apply:  
直装Directly 5#

19003



尺寸Dim.(mm): 34.93\*12.68\*3.60  
克重N.W.(g): 5.20  
适用范围Apply:  
直装Directly 5#

19004



尺寸Dim.(mm): 22.10\*11.20\*2.75  
克重N.W.(g): 1.41  
扭力Torsion(N.m): 1.2  
适用范围Apply: 直装Directly 5#

19005



尺寸Dim.(mm): 37.00\*16.00\*2.10  
克重N.W.(g): 4.24  
扭力Torsion(N.m): 0.36  
适用范围Apply: 直装Directly 3#

19006



尺寸Dim.(mm): 17.50\*18.30\*2.40  
克重N.W.(g): 3.00  
适用范围Apply:  
挂钩J-hook connector 3# 5#

19007



尺寸Dim.(mm): 21.80\*14.10\*2.40  
克重N.W.(g): 2.36  
适用范围Apply:  
挂钩J-hook connector 3# 5#

19009



尺寸Dim.(mm): 28.60\*8.80\*2.65  
克重N.W.(g): 1.99  
扭力Torsion(N.m): 0.44  
适用范围Apply: 直装Directly 3#



19010



尺寸Dim.(mm): 35.70\*11.00\*3.20  
克重N.W.(g): 3.83  
扭力Torsion(N.m): 0.98  
适用范围Apply: 直装Directly 5#

19011



尺寸Dim.(mm): 31.40\*14.10\*4.70  
克重N.W.(g): 5.17  
适用范围Apply: 日字件Type connector 3# 4# 5#

19013



尺寸Dim.(mm): 32.65\*9.70\*3.75  
克重N.W.(g): 3.76  
扭力Torsion(N.m): 1.2  
适用范围Apply: 直装Directly 5#

19014



尺寸Dim.(mm): 24.85\*10.30\*3.80  
克重N.W.(g): 2.18  
适用范围Apply: 直装Directly 3# 5#

19015



尺寸Dim.(mm): 33.20\*11.75\*2.75  
克重N.W.(g): 3.15  
适用范围Apply: 旋转形Rotating 5#

19016



尺寸Dim.(mm): 43.36\*14.35\*2.00  
克重N.W.(g): 5.78  
扭力Torsion(N.m): 1.5  
适用范围Apply: 直装Directly 8#

19017



尺寸Dim.(mm): 29.25\*13.22\*2.20  
克重N.W.(g): 3.05  
扭力Torsion(N.m): 1.5  
适用范围Apply: 直装Directly 5#

19018



尺寸Dim.(mm): 33.23\*13.71\*2.28  
克重N.W.(g): 3.38  
扭力Torsion(N.m): 1.8  
适用范围Apply: 直装Directly 8#

19019



尺寸Dim.(mm): 30.04\*12.43\*3.24  
克重N.W.(g): 2.46  
适用范围Apply: 直装Directly 5#

19020



尺寸Dim.(mm): 19.17\*10.34\*1.62  
克重N.W.(g): 0.77  
适用范围Apply: 直装Directly 3#

19021



尺寸Dim.(mm): 32.16\*11.97\*2.03  
克重N.W.(g): 2.93  
适用范围Apply: 挂钩J-hook connector 3# 4# 5#

19022



尺寸Dim.(mm): 17.46\*16.42\*2.02  
克重N.W.(g): 2.02  
适用范围Apply: 挂钩J-hook connector 3# 4# 5#

19023



尺寸Dim.(mm): 28.33\*12.00\*2.35  
克重N.W.(g): 2.68  
适用范围Apply: 直装Directly 5#

19024



尺寸Dim.(mm): 25.21\*18.03\*2.04  
克重N.W.(g): 30.90  
适用范围Apply: 挂钩J-hook connector 3# 4# 5#

19025



尺寸Dim.(mm): 24.73\*11.84\*2.33  
克重N.W.(g): 2.67  
适用范围Apply: 直装Directly 5#

19026



尺寸Dim.(mm): 42.95\*16.84\*2.59  
克重N.W.(g): 5.44  
扭力Torsion(N.m): 1  
适用范围Apply: 直装Directly 8#



19027



尺寸Dim.(mm): 28.60\*6.42\*2.91  
克重N.W.(g): 2.16  
扭力Torsion(N.m): 0.63  
适用范围Apply: 直装Directly 5#

19028



尺寸Dim.(mm): 27.71\*24.78\*2.41  
克重N.W.(g): 2.22  
适用范围Apply: 日字件Type connector 3# 4# 5#

19029



尺寸Dim.(mm): 30.85\*12.19\*1.97  
克重N.W.(g): 2.68  
扭力Torsion(N.m): 1.2  
适用范围Apply: 直装Directly 5#

19030



尺寸Dim.(mm): 34.73\*14.85\*3.01  
克重N.W.(g): 6.41  
扭力Torsion(N.m): 1.9  
适用范围Apply: 直装Directly 5#

19031



尺寸Dim.(mm): 24.92\*16.97\*2.20  
克重N.W.(g): 1.93  
适用范围Apply: 直装Directly 5#

19032



尺寸Dim.(mm): 34.31\*9.19\*2.97  
克重N.W.(g): 2.94  
扭力Torsion(N.m): 0.61  
适用范围Apply: 直装Directly 5#

19033



尺寸Dim.(mm): 37.45\*10.50\*1.86  
克重N.W.(g): 3.48  
适用范围Apply: 直装Directly 5#

19034



尺寸Dim.(mm): 28.28\*19.80\*2.18  
克重N.W.(g): 3.43  
适用范围Apply: 直装Directly 5#

19035



尺寸Dim.(mm): 31.43\*24.93\*2.77  
克重N.W.(g): 3.63  
适用范围Apply: 日字件Type connector 3# 4# 5#

19036



尺寸Dim.(mm): 25.43\*17.99\*3.13  
克重N.W.(g): 5.32  
适用范围Apply: 挂钩J-hook connector 5# 8#

19037




尺寸Dim.(mm): 22.07\*5.19\*5.19  
克重N.W.(g): 1.07  
适用范围Apply: 日字件Type connector 3# 4# 5#

19038



尺寸Dim.(mm): 33.05\*25.75\*2.77  
克重N.W.(g): 3.69  
适用范围Apply: 挂钩J-hook connector 5#

19039

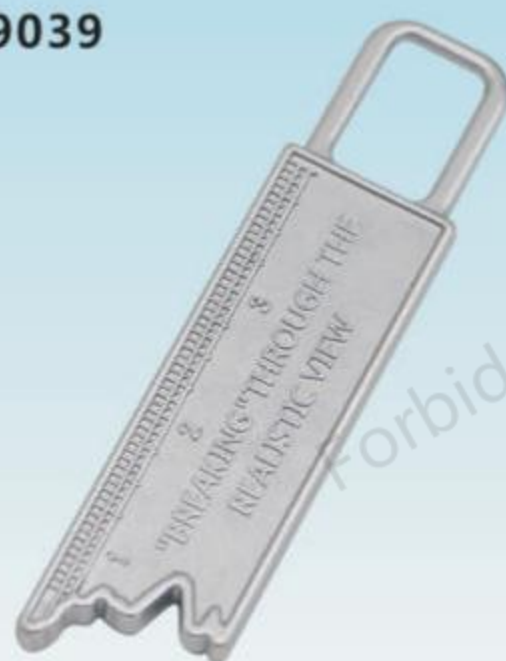

尺寸Dim.(mm): 47.10\*12.01\*2.70  
克重N.W.(g): 6.06  
适用范围Apply: 直装Directly 8# 蝶底

19040



尺寸Dim.(mm): 31.73\*10.08\*2.57  
克重N.W.(g): 3.04  
适用范围Apply: 直装Directly 5#

19041



尺寸Dim.(mm): 44.60\*12.16\*3.61  
克重N.W.(g): 5.66  
适用范围Apply: 直装Directly 8#

19042



尺寸Dim.(mm): 20.35\*7.61\*1.74  
克重N.W.(g): 1.20  
扭力Torsion(N.m): 0.89  
适用范围Apply: 直装Directly 3#



19043



尺寸Dim.(mm): 24.79\*8.90\*1.98  
克重N.W.(g): 1.94  
扭力Torsion(N.m): 1.2  
适用范围Apply: 直装Directly 5#

19044



尺寸Dim.(mm): 30.95\*11.49\*2.17  
克重N.W.(g): 3.42  
扭力Torsion(N.m): 1.8  
适用范围Apply: 直装Directly 8#

19045



尺寸Dim.(mm): 27.94\*13.46\*2.62  
克重N.W.(g): 1.85  
扭力Torsion(N.m): 0.75  
适用范围Apply: 直装Directly 5#

19046



尺寸Dim.(mm): 29.67\*9.61\*1.97  
克重N.W.(g): 2.43  
适用范围Apply: 直装Directly 5#

19047



尺寸Dim.(mm): 24.01\*14.27\*2.21  
克重N.W.(g): 1.39  
适用范围Apply: 直装Directly 5#

19048



尺寸Dim.(mm): 37.29\*27.26\*2.29  
克重N.W.(g): 3.50  
适用范围Apply: 挂钩J-hook connector 3# 4# 5#

19051



尺寸Dim.(mm): 35.47\*6.56\*4.55  
克重N.W.(g): 4.03  
扭力Torsion(N.m): 0.59  
适用范围Apply: 直装Directly 3#

19052



尺寸Dim.(mm): 32.44\*13.19\*3.58  
克重N.W.(g): 5.43  
扭力Torsion(N.m): 1.80  
适用范围Apply: 直装Directly 5#

19053



尺寸Dim.(mm): 41.13\*10.51\*2.36  
克重N.W.(g): 4.19  
适用范围Apply: 直装Directly 5#

19054



尺寸Dim.(mm): 35.59\*24.96\*2.48  
克重N.W.(g): 5.95  
扭力Torsion(N.m): 1.90  
适用范围Apply: 直装Directly 8#

19055



尺寸Dim.(mm): 33.42\*14.12\*2.15  
克重N.W.(g): 2.91  
适用范围Apply: 直装Directly 5#

19056



尺寸Dim.(mm): 46.98\*12.03\*2.66  
克重N.W.(g): 5.87  
适用范围Apply: 直装Directly 8#

19057



尺寸Dim.(mm): 29.97\*7.92\*2.74  
克重N.W.(g): 2.50  
扭力Torsion(N.m): 1.20  
适用范围Apply: 直装Directly 5#

19058




尺寸Dim.(mm): 32.32\*13.39\*1.79  
克重N.W.(g): 3.48  
适用范围Apply: 直装Directly 8#

19059



尺寸Dim.(mm): 40.95\*10.45\*2.31  
克重N.W.(g): 4.19  
适用范围Apply: 直装Directly 5#

19060

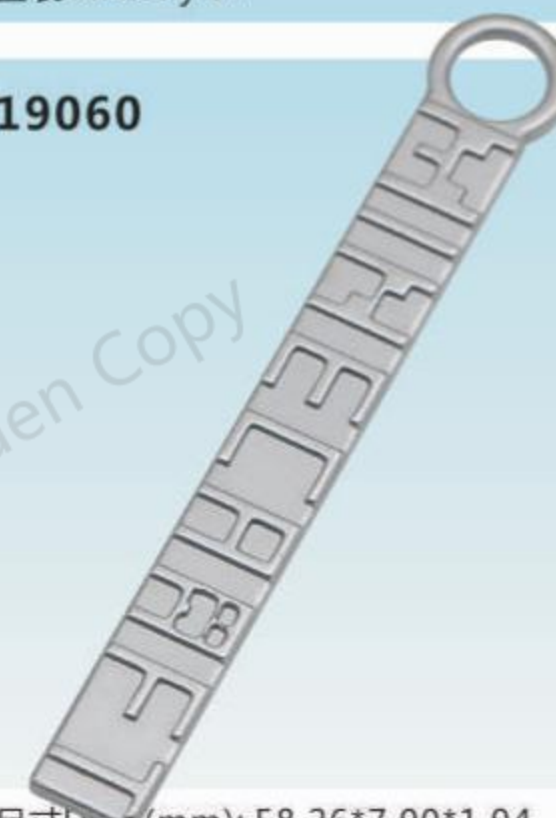

尺寸Dim.(mm): 58.26\*7.00\*1.94  
克重N.W.(g): 3.90  
适用范围Apply: 挂钩J-hook connector 5# 8#



19061



尺寸Dim.(mm): 35.95\*12.55\*2.23  
克重N.W.(g): 2.51  
扭力Torsion(N.m): 0.89  
适用范围Apply: 直装Directly 5#

19062



尺寸Dim.(mm): 25.86\*17.44\*4.71  
克重N.W.(g): 5.79  
适用范围Apply: 挂钩J-hook connector 3# 5#

19063



尺寸Dim.(mm): 34.55\*17.82\*4.00  
克重N.W.(g): 4.75  
适用范围Apply: 直装Directly 8#

19064



尺寸Dim.(mm): 31.03\*7.19\*1.88  
克重N.W.(g): 2.14  
扭力Torsion(N.m): 0.60  
适用范围Apply: 直装Directly 5#

19065



尺寸Dim.(mm): 35.80\*26.25\*5.03  
克重N.W.(g): 6.05  
扭力Torsion(N.m): 0.84  
适用范围Apply: 直装Directly 5#

19066



尺寸Dim.(mm): 23.97\*6.31\*2.25  
克重N.W.(g): 1.24  
适用范围Apply: 直装Directly 3#

19067



尺寸Dim.(mm): 34.58\*16.53\*2.48  
克重N.W.(g): 4.28  
适用范围Apply: 直装Directly 8#

19068



尺寸Dim.(mm): 45.02\*14.33\*3.03  
克重N.W.(g): 10.19  
适用范围Apply: 直装Directly 8# 10#

19069



尺寸Dim.(mm): 25.34\*7.95\*2.86  
克重N.W.(g): 1.77  
适用范围Apply: 直装Directly 3#

19070



尺寸Dim.(mm): 20.04\*7.52\*1.73  
克重N.W.(g): 1.13  
扭力Torsion(N.m): 0.86  
适用范围Apply: 直装Directly 5#

19071



尺寸Dim.(mm): 30.57\*9.95\*1.72  
克重N.W.(g): 2.43  
扭力Torsion(N.m): 0.81  
适用范围Apply: 直装Directly 5#

19072



尺寸Dim.(mm): 34.85\*21.41\*5.42  
克重N.W.(g): 10.74  
适用范围Apply: 其他Other

19073



尺寸Dim.(mm): 19.43\*7.57\*1.31  
克重N.W.(g): 0.90  
扭力Torsion(N.m): 0.55  
适用范围Apply: 直装Directly 3#

19074



尺寸Dim.(mm): 19.61\*10.41\*3.27  
克重N.W.(g): 1.03  
扭力Torsion(N.m): 1.10  
适用范围Apply: 直装Directly 5#

19075



尺寸Dim.(mm): 25.00\*10.99\*1.71  
克重N.W.(g): 1.89  
扭力Torsion(N.m): 0.90  
适用范围Apply: 直装Directly 5#

19076



尺寸Dim.(mm): 35.36\*11.84\*3.47  
克重N.W.(g): 4.15  
扭力Torsion(N.m): 1.10  
适用范围Apply: 直装Directly 5#



19077



尺寸Dim.(mm): 38.46\*13.55\*5.11  
克重N.W.(g): 6.11  
扭力Torsion(N.m): 1.60  
适用范围Apply: 直装Directly 8#

19078



尺寸Dim.(mm): 30.69\*6.76\*2.55  
克重N.W.(g): 2.75  
适用范围Apply:  
日字件Type connector 3# 4# 5#

19079



尺寸Dim.(mm): 28.06\*9.04\*1.99  
克重N.W.(g): 2.67  
扭力Torsion(N.m): 1.20  
适用范围Apply: 直装Directly 5#

19080



尺寸Dim.(mm): 34.98\*11.95\*1.80  
克重N.W.(g): 2.90  
适用范围Apply:  
直装Directly 5#

19081



尺寸Dim.(mm): 12.74\*18.04\*1.75  
克重N.W.(g): 0.72  
适用范围Apply:  
其他Other

19082



尺寸Dim.(mm): 40.09\*13.98\*2.90  
克重N.W.(g): 6.21  
扭力Torsion(N.m): 0.99  
适用范围Apply: 直装Directly 6#

19083



尺寸Dim.(mm): 13.71\*11.30\*0.81  
克重N.W.(g): 0.48  
适用范围Apply:  
其他Other

19084



尺寸Dim.(mm): 23.71\*19.19\*2.37  
克重N.W.(g): 3.65  
适用范围Apply:  
其他Other

19085



尺寸Dim.(mm): 28.02\*8.65\*1.79  
克重N.W.(g): 1.90  
扭力Torsion(N.m): 0.70  
适用范围Apply: 直装Directly 5#

19086



尺寸Dim.(mm): 27.94\*8.56\*1.83  
克重N.W.(g): 1.83  
扭力Torsion(N.m): 0.75  
适用范围Apply: 直装Directly 5#

19088



尺寸Dim.(mm): 32.86\*14.91\*3.55  
克重N.W.(g): 2.21  
适用范围Apply:  
直装Directly 5#

19089



尺寸Dim.(mm): 23.53\*18.85\*2.63  
克重N.W.(g): 4.00  
适用范围Apply:  
日字件Type connector 3# 4# 5#

19090



尺寸Dim.(mm): 30.13\*12.48\*1.86  
克重N.W.(g): 2.05  
适用范围Apply:  
直装Directly 5#

19091



尺寸Dim.(mm): 26.10\*4.57\*4.57  
克重N.W.(g): 2.34  
适用范围Apply:  
挂钩J-hook connector 3# 4# 5#

19092



尺寸Dim.(mm): 25.00\*12.43\*3.59  
克重N.W.(g): 2.37  
扭力Torsion(N.m): 1.8  
适用范围Apply: 直装Directly 5#

19093



尺寸Dim.(mm): 25.61\*14.82\*2.93  
克重N.W.(g): 3.94  
适用范围Apply:  
日字件Type connector 3#



19094



尺寸Dim.(mm): 33.32\*19.80\*3.90  
克重N.W.(g): 8.73  
适用范围Apply:  
日字件Type connector 5#

19095



尺寸Dim.(mm): 30.18\*10.40\*2.43  
克重N.W.(g): 3.58  
适用范围Apply:  
直装Directly 8#

19096



尺寸Dim.(mm): 30.06\*9.88\*1.73  
克重N.W.(g): 2.39  
适用范围Apply:  
直装Directly 5#

19097



尺寸Dim.(mm): 25.40\*14.70\*2.19  
克重N.W.(g): 2.29  
适用范围Apply:  
直装Directly 5#

19098



尺寸Dim.(mm): 28.71\*22.20\*2.42  
克重N.W.(g): 2.23  
适用范围Apply:  
挂钩J-hook connector 3# 4# 5#

19099



尺寸Dim.(mm): 31.04\*18.02\*1.95  
克重N.W.(g): 2.93  
适用范围Apply:  
日字件Type connector 3# 4# 5#

19100



尺寸Dim.(mm): 30.19\*16.12\*1.74  
克重N.W.(g): 2.64  
适用范围Apply:  
直装Directly 8#

19101



尺寸Dim.(mm): 25.12\*9.18\*1.60  
克重N.W.(g): 1.67  
适用范围Apply:  
直装Directly 5#

19102



尺寸Dim.(mm): 35.86\*8.19\*2.63  
克重N.W.(g): 3.82  
适用范围Apply:  
直装Directly 5#

19103



尺寸Dim.(mm): 31.04\*10.54\*1.59  
克重N.W.(g): 2.72  
适用范围Apply:  
直装Directly 5#

19104



尺寸Dim.(mm): 39.79\*13.26\*1.61  
克重N.W.(g): 4.53  
扭力Torsion(N.m): 1.1  
适用范围Apply: 直装Directly 8#

19105



尺寸Dim.(mm): 24.60\*4.78\*3.83  
克重N.W.(g): 1.98  
扭力Torsion(N.m): 1  
适用范围Apply: 直装Directly 3#

19106



尺寸Dim.(mm): 29.91\*11.90\*2.28  
克重N.W.(g): 2.64  
适用范围Apply:  
直装Directly 5#

19108



尺寸Dim.(mm): 23.08\*10.98\*1.81  
克重N.W.(g): 1.73  
适用范围Apply:  
直装Directly 5#

19109



尺寸Dim.(mm): 57.73\*5.50\*2.54  
克重N.W.(g): 4.63  
适用范围Apply:  
直装Directly 5#

19110



尺寸Dim.(mm): 25.71\*20.95\*3.01  
克重N.W.(g): 6.19  
适用范围Apply:  
直装Directly 5#



19111



尺寸Dim.(mm): 27.12\*7.38\*2.40  
克重N.W.(g): 2.34  
适用范围Apply:  
直装Directly 5#

19112



尺寸Dim.(mm): 33.63\*10.59\*2.27  
克重N.W.(g): 3.73  
适用范围Apply:  
直装Directly 8#

19113



尺寸Dim.(mm): 31.66\*11.15\*2.81  
克重N.W.(g): 1.97  
适用范围Apply:  
直装Directly 5#

19114



尺寸Dim.(mm): 35.08\*10.95\*2.03  
克重N.W.(g): 3.87  
适用范围Apply:  
直装Directly 8#

19116



尺寸Dim.(mm): 57.93\*5.57\*2.58  
克重N.W.(g): 4.80  
扭力Torsion(N.m): 1.6  
适用范围Apply: 直装Directly 8#

19117



尺寸Dim.(mm): 20.03\*7.79\*1.41  
克重N.W.(g): 1.06  
扭力Torsion(N.m): 0.64  
适用范围Apply: 直装Directly 3#

19118



尺寸Dim.(mm): 22.05\*6.60\*1.76  
克重N.W.(g): 1.25  
扭力Torsion(N.m): 0.7  
适用范围Apply: 直装Directly 3#

20001



1.02

尺寸Dim.(mm): 25.00\*11.03\*2.02  
克重N.W.(g): 2.08  
扭力Torsion(N.m): 0.7  
适用范围Apply: 直装Directly 5#

20002



尺寸Dim.(mm): 31.52\*11.00\*2.40  
克重N.W.(g): 2.98  
扭力Torsion(N.m): 0.79  
适用范围Apply: 直装Directly 5#

20003



尺寸Dim.(mm): 40.32\*27.20\*3.20  
克重N.W.(g): 5.22  
扭力Torsion(N.m): 1.12  
适用范围Apply: 直装Directly 8#

20004



尺寸Dim.(mm): 47.83\*11.65\*2.95  
克重N.W.(g): 3.37  
适用范围Apply:  
直装Directly 5#

20005



尺寸Dim.(mm): 24.41\*5.40\*2.00  
克重N.W.(g): 0.85  
适用范围Apply:  
挂钩J-hook connector 3# 4# 5#

20006



尺寸Dim.(mm): 33.25\*10.50\*2.00  
克重N.W.(g): 3.52  
适用范围Apply:  
旋转头Rotating 5#

20007



尺寸Dim.(mm): 39.20\*26.80\*4.00  
克重N.W.(g): 5.40  
扭力Torsion(N.m): 0.91  
适用范围Apply: 直装Directly 5#

20008



尺寸Dim.(mm): 35.00\*7.25\*2.00  
克重N.W.(g): 2.28  
扭力Torsion(N.m): 0.8  
适用范围Apply: 直装Directly 5#

20009



尺寸Dim.(mm): 30.70\*8.00\*2.90  
克重N.W.(g): 1.77  
扭力Torsion(N.m): 0.73  
适用范围Apply: 直装Directly 5#



20010



尺寸Dim.(mm): 29.35\*12.00\*1.96  
克重N.W.(g): 2.38  
扭力Torsion(N.m): 1.01  
适用范围Apply: 直装Directly 5#

20011



尺寸Dim.(mm): 29.30\*12.00\*1.90  
克重N.W.(g): 2.24  
适用范围Apply: 直装Directly 5#

20012



尺寸Dim.(mm): 29.30\*12.00\*1.90  
克重N.W.(g): 2.25  
适用范围Apply: 直装Directly 5#

20013



尺寸Dim.(mm): 29.30\*12.00\*1.90  
克重N.W.(g): 2.22  
适用范围Apply: 直装Directly 5#

20014



尺寸Dim.(mm): 29.80\*6.15\*1.60  
克重N.W.(g): 1.32  
适用范围Apply: 直装Directly 5#

20015



尺寸Dim.(mm): 15.20\*7.30\*1.70  
克重N.W.(g): 0.57  
扭力Torsion(N.m): 0.98  
适用范围Apply: 弹簧头Spring 3#

20016



尺寸Dim.(mm): 23.06\*12.25\*1.98  
克重N.W.(g): 2.03  
适用范围Apply: 旋转头Rotating 5#

20017



尺寸Dim.(mm): 30.00\*9.00\*2.00  
克重N.W.(g): 2.87  
适用范围Apply: 直装Directly 5#

20018



尺寸Dim.(mm): 30.00\*9.00\*2.00  
克重N.W.(g): 2.85  
适用范围Apply: 直装Directly 5#

20019



尺寸Dim.(mm): 34.10\*9.20\*2.00  
克重N.W.(g): 3.10  
扭力Torsion(N.m): 0.96  
适用范围Apply: 直装Directly 5#

20020



尺寸Dim.(mm): 30.35\*22.75\*2.90  
克重N.W.(g): 2.28  
适用范围Apply: 旋转头Rotating 5#

20021



尺寸Dim.(mm): 22.50\*15.80\*2.35  
克重N.W.(g): 1.41  
适用范围Apply: 直装Directly 5#

20022



尺寸Dim.(mm): 24.80\*10.30\*2.00  
克重N.W.(g): 2.14  
扭力Torsion(N.m): 0.95  
适用范围Apply: 直装Directly 5#

20024



尺寸Dim.(mm): 60.60\*10.20\*5.50  
克重N.W.(g): 8.60  
适用范围Apply: 直装Directly 8#

20025



尺寸Dim.(mm): 23.95\*8.20\*2.00  
克重N.W.(g): 1.68  
适用范围Apply: 直装Directly 3#

20026



尺寸Dim.(mm): 30.50\*14.20\*2.05  
克重N.W.(g): 3.53  
扭力Torsion(N.m): 0.98  
适用范围Apply: 直装Directly 5#



20027



尺寸Dim.(mm): 28.60\*18.60\*2.00  
克重N.W.(g): 3.58  
适用范围Apply:  
直装Directly 5#

20028



尺寸Dim.(mm): 32.00\*11.35\*2.80  
克重N.W.(g): 3.66  
适用范围Apply:  
直装Directly 5#

20029



尺寸Dim.(mm): 21.80\*11.35\*2.30  
克重N.W.(g): 0.90  
适用范围Apply:  
直装Directly 5#

20030



尺寸Dim.(mm): 25.50\*11.50\*2.00  
克重N.W.(g): 1.89  
扭力Torsion(N.m): 0.72  
适用范围Apply: 直装Directly 5#

20031



尺寸Dim.(mm): 24.00\*9.25\*1.80  
克重N.W.(g): 1.61  
扭力Torsion(N.m): 1.02  
适用范围Apply: 直装Directly 5#

20032



尺寸Dim.(mm): 31.75\*22.80\*2.80  
克重N.W.(g): 2.18  
扭力Torsion(N.m): 1.11  
适用范围Apply: 直装Directly 5#

20033



尺寸Dim.(mm): 35.80\*10.15\*1.96  
克重N.W.(g): 3.44  
扭力Torsion(N.m): 0.92  
适用范围Apply: 直装Directly 5#

20034



尺寸Dim.(mm): 34.95\*9.00\*2.45  
克重N.W.(g): 3.55  
扭力Torsion(N.m): 1.49  
适用范围Apply: 直装Directly 8#

20035



尺寸Dim.(mm): 22.40\*9.40\*3.40  
克重N.W.(g): 2.76  
扭力Torsion(N.m): 0.87  
适用范围Apply: 直装Directly 5#

20036



尺寸Dim.(mm): 18.10\*8.05\*3.05  
克重N.W.(g): 2.12  
适用范围Apply:  
旋转头Rotating 3#

20037



尺寸Dim.(mm): 22.95\*15.30\*2.10  
克重N.W.(g): 1.23  
适用范围Apply:  
直装Directly 5#

20038



尺寸Dim.(mm): 50.00\*20.45\*2.50  
克重N.W.(g): 4.51  
适用范围Apply:  
直装Directly 8#

20039



尺寸Dim.(mm): 21.60\*10.50\*3.00  
克重N.W.(g): 1.36  
适用范围Apply:  
直装Directly 5#

20040



尺寸Dim.(mm): 23.80\*10.00\*2.40  
克重N.W.(g): 2.05  
适用范围Apply:  
直装Directly 3#

20041



尺寸Dim.(mm): 31.95\*13.40\*3.40  
克重N.W.(g): 4.98  
适用范围Apply:  
直装Directly 5#

20042



尺寸Dim.(mm): 31.90\*15.00\*3.80  
克重N.W.(g): 3.51  
适用范围Apply:  
直装Directly 5#



20043



尺寸Dim.(mm): 30.35\*9.00\*2.25  
克重N.W.(g): 2.72  
扭力Torsion(N.m): 1.4  
适用范围Apply: 直装Directly 5#

20044



尺寸Dim.(mm): 42.50\*14.30\*4.60  
克重N.W.(g): 4.86  
适用范围Apply: 挂钩J-hook connector 5# 8#

20045



尺寸Dim.(mm): 30.00\*9.00\*1.81  
克重N.W.(g): 2.69  
适用范围Apply: 直装Directly 5#

20046



尺寸Dim.(mm): 32.00\*13.00\*2.00  
克重N.W.(g): 2.88  
扭力Torsion(N.m): 1.26  
适用范围Apply: 直装Directly 5#

20047



尺寸Dim.(mm): 16.00\*7.30\*2.70  
克重N.W.(g): 1.16  
适用范围Apply: 直装Directly 3#

20048



尺寸Dim.(mm): 47.70\*22.81\*6.70  
克重N.W.(g): 4.20  
适用范围Apply: 挂钩J-hook connector 5# 8#

20049



尺寸Dim.(mm): 27.90\*12.90\*2.11  
克重N.W.(g): 2.67  
适用范围Apply: 直装Directly 5#

20050



尺寸Dim.(mm): 35.40\*25.90\*6.70  
克重N.W.(g): 2.96  
适用范围Apply: 直装Directly 5#

20051



尺寸Dim.(mm): 32.00\*8.30\*2.20  
克重N.W.(g): 2.60  
适用范围Apply: 直装Directly 5#

20052



尺寸Dim.(mm): 29.00\*26.35\*2.48  
克重N.W.(g): 1.80  
适用范围Apply: 挂钩J-hook connector 3# 5#

20053



尺寸Dim.(mm): 42.35\*26.65\*2.95  
克重N.W.(g): 5.23  
适用范围Apply: 直装Directly 5#

20054



尺寸Dim.(mm): 45.30\*32.90\*6.00  
克重N.W.(g): 6.42  
适用范围Apply: 直装Directly 5#

20055



尺寸Dim.(mm): 39.00\*25.63\*10.06  
克重N.W.(g): 5.44  
适用范围Apply: 直装Directly 5#

20056



尺寸Dim.(mm): 33.24\*26.00\*3.85  
克重N.W.(g): 3.50  
适用范围Apply: 挂钩J-hook connector 5# 8#

20057



尺寸Dim.(mm): 33.50\*25.00\*2.30  
克重N.W.(g): 3.46  
适用范围Apply: 直装Directly 5#

20058



尺寸Dim.(mm): 26.20\*18.50\*1.90  
克重N.W.(g): 3.64  
扭力Torsion(N.m): 1.23  
适用范围Apply: 直装Directly 5#



20059



尺寸Dim.(mm): 25.46\*14.80\*2.18  
克重N.W.(g): 2.39  
扭力Torsion(N.m): 1.29  
适用范围Apply: 直装Directly 5#

20060



尺寸Dim.(mm): 31.10\*15.00\*2.70  
克重N.W.(g): 2.29  
适用范围Apply: 挂钩J-hook connector 3# 5#

20061



尺寸Dim.(mm): 31.50\*22.41\*2.20  
克重N.W.(g): 3.63  
扭力Torsion(N.m): 1.04  
适用范围Apply: 直装Directly 5#

20062



尺寸Dim.(mm): 34.05\*11.10\*3.50  
克重N.W.(g): 2.12  
扭力Torsion(N.m): 0.79  
适用范围Apply: 直装Directly 5#

20063



尺寸Dim.(mm): 30.20\*22.00\*2.20  
克重N.W.(g): 2.42  
扭力Torsion(N.m): 1.19  
适用范围Apply: 直装Directly 5#

20064



尺寸Dim.(mm): 30.10\*21.90\*2.20  
克重N.W.(g): 2.57  
扭力Torsion(N.m): 1.06  
适用范围Apply: 直装Directly 5#

20065



尺寸Dim.(mm): 27.00\*15.00\*2.00  
克重N.W.(g): 1.90  
适用范围Apply: 挂钩J-hook connector 3# 5#

20066



尺寸Dim.(mm): 33.20\*23.10\*1.90  
克重N.W.(g): 3.06  
扭力Torsion(N.m): 0.89  
适用范围Apply: 直装Directly 5#

20067



尺寸Dim.(mm): 35.70\*29.20\*3.25  
克重N.W.(g): 4.09  
扭力Torsion(N.m): 1.18  
适用范围Apply: 直装Directly 5#

20068



尺寸Dim.(mm): 28.40\*14.50\*4.10  
克重N.W.(g): 3.46  
扭力Torsion(N.m): 1.17  
适用范围Apply: 直装Directly 5#

20069



尺寸Dim.(mm): 22.30\*17.80\*1.80  
克重N.W.(g): 2.59  
适用范围Apply: 挂钩J-hook connector 3# 5#

20070



尺寸Dim.(mm): 26.50\*15.10\*3.20  
克重N.W.(g): 2.46  
适用范围Apply: 挂钩J-hook connector 3# 5#

20071



尺寸Dim.(mm): 30.60\*12.00\*2.20  
克重N.W.(g): 2.05  
扭力Torsion(N.m): 1.03  
适用范围Apply: 直装Directly 5#

21001



尺寸Dim.(mm): 35.15\*24.00\*4.00  
克重N.W.(g): 11.99  
适用范围Apply: 挂钩J-hook connector 5# 7# 8#

21002



尺寸Dim.(mm): 27.60\*11.65\*2.50  
克重N.W.(g): 3.23  
扭力Torsion(N.m): 1.61  
适用范围Apply: 直装Directly 5#

21003



尺寸Dim.(mm): 29.30\*12.10\*2.00  
克重N.W.(g): 2.38  
适用范围Apply: 直装Directly 5#



21004



尺寸Dim.(mm): 18.15\*10.70\*1.98  
克重N.W.(g): 0.98  
适用范围Apply:  
旋转头Rotating 3#

21005



尺寸Dim.(mm): 16.80\*9.50\*2.40  
克重N.W.(g): 0.66  
扭力Torsion(N.m): 0.67  
适用范围Apply: 直装Directly 3#

21006



尺寸Dim.(mm): 21.65\*12.15\*2.35  
克重N.W.(g): 1.14  
扭力Torsion(N.m): 1.13  
适用范围Apply: 直装Directly 5#

21007



尺寸Dim.(mm): 16.65\*14.25\*4.50  
克重N.W.(g): 1.82  
适用范围Apply:  
挂钩J-hook connector 3# 5#

21008



尺寸Dim.(mm): 15.00\*15.20\*2.15  
克重N.W.(g): 1.24  
适用范围Apply:  
挂钩J-hook connector 3# 5#

21009



尺寸Dim.(mm): 25.64\*22.47\*2.47  
克重N.W.(g): 3.20  
适用范围Apply:  
挂钩J-hook connector 5# 8#



# ABS

## 注塑胶片拉头系列

RUBBER&PVC PULLER SERIES

W0027



W0090



W0125



W0127



W0128



W0168



W0180



W0181



W0182



W0183



W0184



W0185



W0186



W0187



W0188



W0189



此图样只提供参考，部分图样是客户注册商标不得仿冒。

These drawing give reference only, part of the drawing is customer's trademarks, shall not be counterfeit.



# ABS

## 注塑胶片拉头系列

RUBBER&PVC PULLER SERIES

W0190



W0191



W0192



W0193



W0194



W0195



W0196



W0197



W0198



W0199



W0200



W0201



W0205



W0202



W0206



W0207



此图样只提供参考，部分图样是客户注册商标不得仿冒。

These drawing give reference only, part of the drawing is customer's trademarks, shall not be counterfeit.



# ABS

## 注塑胶片拉头系列

RUBBER&PVC PULLER SERIES

W0210



W0211



W0212



W0213



W0214



W0215



W0216



W0217



W0218



W0219



W0220



W0221



此图样只提供参考，部分图样是客户注册商标不得仿冒。

These drawing give reference only, part of the drawing is customer's trademarks, shall not be counterfeit.



# ABS 注塑胶片拉头系列

## RUBBER&PVC PULLER SERIES



此图样只提供参考，部分图样是客户注册商标不得仿冒。  
These drawing give reference only, part of the drawing is customer's trademarks, shall not be counterfeit.



**ABS** 新款拉头  
NEW SLIDER

ABS-W0801款



ABS-W0802款



ABS-W0803款



ABS-W0804款



ABS-W0805款



ABS-W0806款



ABS-W0807款



ABS-W0808款



ABS-W0809款



ABS-W0810款



ABS-W0811款



ABS-W0812款



ABS-W0813款



ABS-W0814款



ABS-W0815款





**ABS** 新款拉头  
NEW SLIDER

ABS-W0816款



ABS-W0817款



ABS-W0818款



ABS-W0819款



ABS-W0820款



ABS-W0821款



ABS-W0822款



ABS-W0823款



ABS-W0824款



ABS-W0825款



ABS-W0826款



ABS-W0827款



ABS-W0828款



ABS-W0829款



ABS-W0830款







公司网站  
Company's web



微信  
WeChat



# ABS

浙江创发拉链科技有限公司  
Zhejiang Chuangfa Zipper Technology Co.,Ltd.

📍 浙江海宁市许巷开发区许巷路19号  
No.19.Xuxiang RD, Xuxiang industry area,  
Haining, Zhejiang China

☎ 0573-87993688 87909666

📠 0573-87993686

✉ abs@abszipper.com

🌐 www.abszipper.com

📍 **杭州办事处 Hangzhou Office**  
杭州市严家路5-13号  
No. 5-13, Yanjia nong Road, Hangzhou

☎ 0571-86989789 86293888

📠 0571-89195203

✉ xj@abszipper.com

📍 **上海办事处 Shanghai office**  
上海市闵行区申滨南路998号E栋3楼363室  
Room 363. 3 Floor, E Buliding, No.998 ShenBin RD,  
MingHang District, Shanghai, China 201100

☎ 021-62365096/62365098

✉ Bella@abszipper.com